

Hey! It's Jeff. 2025 was quite a ride, wasn't it? Well, it's a new season and a new Catalog and a whole new year just ahead of us. And what we're bringing out in 2026 is pretty cool.

There's been a flood of interest in large ponds, Koi ponds and recreational ponds, so we're right here with the biggest and best filtration for all. We're introducing the massive ProfiClear XL Series drum filter, in two flavors to handle your largest and most demanding applications. Both build off an enormous, fully automatic self-cleaning drum that screens everything out of the water down to 80 microns, which Google tells me is the diameter of an average human hair. And that's just the prefilter! And we've got big new stainless steel Bitron 60 and Bitron 180 Premium UVC Clarifiers that pair up with these enormous filters. If you've been getting calls for Koi or Rec ponds, take a look, it's worth the time.

Along with the massive upswing in interest in Recreational Ponds and Natural Swimming Pools, there's been a lot of conflicting information about how to build them. Oase has been the go-to for natural swim pond equipment in Europe and the rest of the world for decades, offering the best tested and safest products in the industry.

For those who prefer making a splash with Fountains, good news for you, too - Aquarius Eco Premium pumps are in. Now those dancing water displays only Eco Expert pumps could deliver? They're available in smaller sizes, with all the bells and whistles. Aquarius Eco Premiums dance to a pre-programmed pattern at the push of a button. And just like the big boys, connect them via cables to the Oase Control system and get a choice of 12 'scenes' of oscillating fountain displays! They can even let you know via Wi-Fi when they shut themselves off, so you can get there before your customer knows they're down. Talk about a great security system to offer!

Not to miss an opportunity, we've paired an Aquarius 3700 with the PondJet float to create the updated PondJet Eco Premium Floating Fountain, with a 75' power cord and an optional ProfiLux Illumination Set. Forget simple, static sprays. Wait'll they see the show this setup can put on!

Again on the Fountain side, we're introducing a new set of hand-made Hammered Brass Sphere Fountains - a new shape, and a new finish - Antique Polished Brass. All are available alone or in kits, a total of fourteen new options. I'm pretty sure every golf course in America is gonna like the brass spheres. Let's see if you agree.

And as always, we're here to help you succeed, with printed media, in-house training classes, a ever-growing library of product videos, our strong social media presence and of course, best-in-class customer service.

Here's to a great 2026! Jeff Weemhoff, President, & the Atlantic-Oase Team



TABLE OF CONTENTS

FORMAL SPILLWAY

BASIN KITS / BASINS / FLEXIBLE BASINS / COPPER SPILLWAY BOWLS / WALL SPOUTS / COLORFALLS / COLOR CHANGING COLORFALLS / SPILLWAYS / WATERWALLS / SPLASH RINGS / PROJECT BUNDLES

POUNTAIN

FOUNTAIN BASINS / ACCESSORIES / ECO-RISE & DIVERTER / HAMMERED BRASS BOWLS / AURA VASES / BRASS SPHERES / BASALT COLUMNS / WATER TRIO & QUINTET / FLEXIBLE BASINS / NOZZLES / PROFESSIONAL NOZZLES

PF POND-FREE

ECO-BLOX / POND-FREE KITS / PUMP VAULTS / FASTFALLS

52 WG WATER GARDEN

FILTRAL UVC / BIOPRESS / FILTOCLEAR / SKIMMERS / IN-POND SKIMMERS / BIOSMART / BIOTEC SCREENMATIC² / PROFICLEAR PREMIUMS & MODULES / VITRONIC / BITRON C / BITRON PREMIUM / FILTERFALLS / WATER GARDEN KITS / SWIM PONDS

PUMP

FP-SERIES / FOUNTAIN / AQUARIUS ECO PREMIUM / AQUARIUS ECO EXPERT / MD-SERIES / WATERFALL / AQUAMAX ECO CLASSIC /
AQUAMAX ECO PREMIUM / TT-SERIES / AQUAMAX ECO EXPERT / PAF-SERIES / A-SERIES / L-SERIES / ACCESSORIES

110 INSTALLATION
CHECK VALVES / INSTALLATION PRODUCTS / FITTINGS & TUBING / EPDM LINER

LIGHTING

SPOTLIGHTS / HARDSCAPE LIGHTS / FOUNTAIN LIGHTING / SPECIALTY LIGHTING / POND LIGHTING / WIRING / INFICOLOR SMART MODULE / WIRING KITS / TRANSFORMERS / PROFILUX LIGHTING / GARDEN CLOUD CONTROLLER

132 MAINTENANCE

IONIZER / PONDOVACS / AIR PUMPS / AQUAOXY / OXYTEX / TREATMENTS / POND DE-ICER / TOOLS & ACCESSORIES / NETTING

POND & LAKE

DIFFUSERS / COMPRESSORS / TUBING / TREATMENTS / SHALLOW WATER SYSTEMS / DEEP WATER SYSTEMS /
FLOATING FOUNTAINS

160 TD TECHNICAL DATA, POP, ACCESSORIES & PARTS

Products proudly manufactured in the United States

Products proudly manufactured in Germany

Video available through our website

Eco-friendly product with outstanding energy balance

CAD CAD drawing available through our website

3D 3D model available on our website

Oase Control (OC) product

Clear Water Guarantee (CWG) product

WHAT'S NEW FOR **2026?**

FOUNTAINS



Antique Brass Aura Vases & Kits Page 30-31



Antique & Verde Brass Spheres & Kits Page 32-33

PUMPS

SWIM POND CONSTRUCTION GUIDE



Aquarius Eco Premium Page 92



Natural Swim Pond Guide & Constrution Diagrams Page 84-87

POND & LAKE



PondJet Eco Premium Page 159



Floating Fountain RGB Illumination Set **Page 159**

WATER GARDEN



ProfiClear XL System - Pump-fed Page 72-73



Bitron Premium Page 78



ProfiClear XL System - Gravity-fed Page 74-75

2025 - 2026 CONTRACTOR TRAINING DATES

Are you looking for more experience installing water features? Want to add new revenue to your bottom line? Or broaden your understanding of the water feature business? We designed our Atlantic-Oase Contractor Training for you!





Visit www.atlantic-oase.com/training or scan the QR code for more information and our most up-to-date schedule!

SESSION 1: FOUNTAIN, FORMAL SPILLWAY & POND-FREE SYSTEMS

- Tuesday, November 18, 2025 Friday, November 21, 2025
- Tuesday, February 24, 2026 Friday, February 27, 2026

SESSION 2: WATER GARDEN SYSTEMS, MAINTENANCE & BIOLOGY

- Tuesday, December 9, 2025 Friday, December 12, 2025
- Tuesday, March 10, 2026 Friday, March 13, 2026

SESSION 3: ADVANCED SYSTEMS & FILTRATION

- Tuesday, January 13, 2026 Friday, January 16, 2026
- Tuesday, March 24, 2026 Friday, March 27, 2026

SESSION 4: FOUNTAINS & FORMAL SPILLWAYS FOR HARDSCAPES

- Tuesday, January 27, 2026 Friday, January 30, 2026
- Tuesday, February 10, 2026 Friday, February 13, 2026


More information on page 186

5

FS FORMAL SPILLWAY

Atlantic's Formal Spillway System makes easy work of adding the charm of running water to new or existing landscape or hardscape walls. Minimal noise and splash make this system ideal for indoor applications. Convenient Basin Kits include everything needed for installation, saving time and money. All components are matched for perfect performance every time.

- >> Double filter mats keep debris out of the system, eliminating time consuming cleanouts
- » Basin Kits require no guesswork for installation and accommodate four spillway options
- » Dimensions of basins work well with all engineered stone systems
- >> High efficiency pumps and top quality components keep cost of operation minimal
- » Water flow is adjustable to achieve the perfect effect regardless of location
- >> The rigid basins are completely weatherproof and carry a lifetime warranty

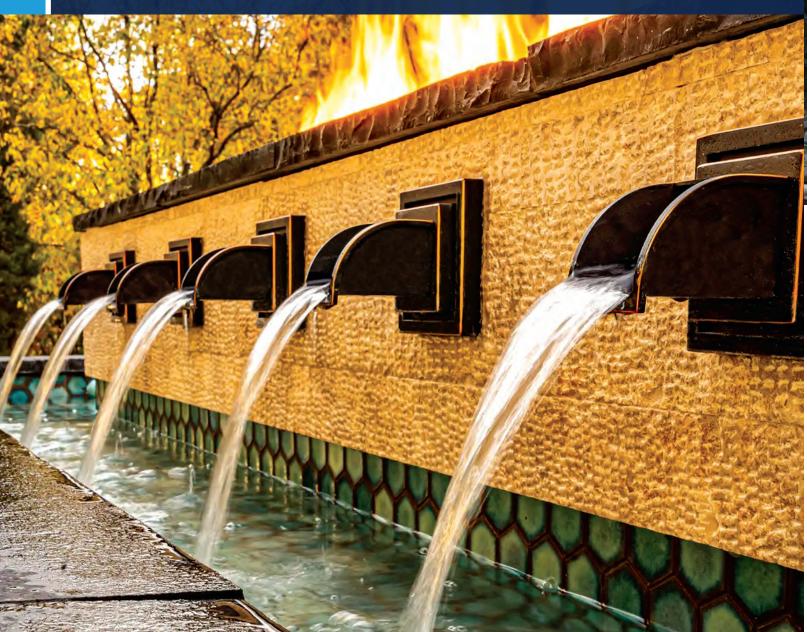




- Formal Spillway Basins are seamless, leak-proof and molded in sizes that complement most modular wall and paving systems, for easy installation and minimal cutting.
- Built-in recesses route all the plumbing beneath the basin, including Auto Fill feed lines and low voltage wiring for accent lighting.
- 3 Basin Kits include all plumbing and fittings needed for installation, with a single union ball valve for easy pump removal and adjustment of water flow to the spillway.
- 4 All plumbing is contained inside the perimeter of the basin, allowing retaining wall blocks to surround the basin with no notching or cutting.



and spillway, filtering the water and diffusing turbulence for even water flow from the spillway.
6 Large pump chamber accommodates the appropriate

5 Internal Matala mat prevents any

debris from entering the pump



- 7 Complete Basin Kits work interchangeably with all Atlantic Formal Spillway styles: Colorfalls, Color Changing Colorfalls and Spillways.
- 8 Atlantic Splash Rings keep stones in place and splash at bay as effectively as our Splash Mats, but with the appeal of steel and copper. Add an LED Ring Light under the mesh to illuminate the falls from below.














73849 73850 73851

- The heart of Atlantic Formal Spillway Systems, Basin Kits provide everything you need to install Colorfalls, WaterWalls and Spillways
- Three sizes of self-contained basins, complete with pumps and plumbing, accommodate 12, 24 and 36-inch Formal Spillways
- Seamless installation with four-inch garden block
- Basin Kits include basin, Splash Mat, pump, plumbing, PVC glue, adjustment valve and Auto Fill, all in one box

ITEM	73849	73850	73851	
MODEL	CFBASINKIT12	CFBASINKIT24	CFBASINKIT36	
DESCRIPTION	Complete Basin Kit for 12" Spillways	Complete Basin Kit for 24" Spillways	Complete Basin Kit for 24" Spillways	
FOR USE WITH	All 6" & 12" Spillways	All 24" Spillways	All 36" Spillways	
DIMENSIONS	20"W x 20"D x 16"H	44"W x 22"D x 16"H	56"W x 24"D x 16"H	
PUMP	TT1500	ТТ3000	TT4000	
WARRANTY		Basin - Lifetime / Pump - 3-year		

TECH TIP

Atlantic's Basin Kits come with everything needed to create a fully functioning water feature with any single Formal Spillway. Simply choose the appropriate width Basin Kit. For multiple Spillway installations, double or triple Wall Spout installations or Spillway and double Spout installations, you will need to add tees and valves and create a manifold to accommodate the additional water outlets. See page 165 for valved manifold examples.



FORMAL SPILLWAY BASINS







73852 74232 74233

ITEM	73852	74232	74233		
MODEL	CFBASIN12	CFBASIN24	CFBASIN36		
DESCRIPTION	Formal Spillway Basin for 12" Spillways	Formal Spillway Basin for 24" Spillways	Formal Spillway Basin for 36" Spillways		
DIMENSIONS	20"W x 20"D x 16"H	44"W x 22"D x 16"H	56"W x 24"D x 16"H		
CAPACITY	18 gallons	33 gallons	42 gallons		
FILTERING		Matala Filter Mat			
FOR USE WITH	12" Spillways	24" Spillways	36" Spillways		
WARRANTY	Lifetime				

ACCESSORIES







73845 74230 74231

ITEM	73845	74230	74231	73846		
MODEL	CFSPMA12	CFSPMA24	CFSPMA36	CFSPMA2820		
DESCRIPTION	Splash Mat for CFBASIN12	Splash Mat for CFBASIN24	Splash Mat for CFBASIN36	Splash Mat Roll		
DIMENSIONS	17"L x 17"W	41"L x 19"W	53"L x 21"W	20'L x 28"W		
FOR USE WITH	CFBASIN12	CFBASIN24	CFBASIN36	Custom Installations		
WARRANTY	1-year					

ATLANTIC






> 73837 73840 73843

73838 73841 73844





- For those applications that require an open basin, Atlantic's Flexible Basins are the easiest way to waterproof your block installation
- glue points anchor liner under capstones for security and durability
- Unlike improvised EPDM liner basins, welded corner construction eliminates folds and wrinkles for a neat professional appearance
- Basins are available in tan, grey and black to complement any surround up to eight-feet wide
- Reinforced 28mil PVC construction with fold out flaps and punched Includes backing plates and bulkheads for submersible or external pumps. Use Cord Seal Fittings to pass cords
 - Perfect for use with Atlantic Spillways, WaterWalls and Wall Spouts, not recommended for Colorfalls installations without a FiltoClear, page 56

ITEM	73836	73837	73838	73839	73840	73841	73842	73843	73844	
MODEL	FF4216B	FF4216G	FF4216T	FF6216B	FF6216G	FF6216T	FF8216B	FF8216G	FF8216T	
DESCRIPTION	N 4' x 2' Flexible Hardscape Basin		e Basin	6' x 2' F	6' x 2' Flexible Hardscape Basin			8' x 2' Flexible Hardscape Basin		
COLOR	Black	Grey	Tan	Black	Grey	Tan	Black	Grey	Tan	
FOR USE WITH		Spillways, WaterWalls & Wall Spouts								
DIMENSIONS		4'W x 2'D x 16"H		6'W x 2'D x 16"H			8'W x 2'D x 16"H			
CAPACITY		80 gallons		120 gallons			160 gallons			
BULKHEAD	1½" w/ Backing Plate (2) 1½" w/ Backing Plates									
WARRANTY		1-year								







73854 73853

- Spillway Bowls complement any hardscape, landscape or poolscape with the elegance of copper
- Atlantic Copper Spillway Bowls are crafted out of solid copper in both round and square styles
- Copper Spillway Bowls are designed to form a natural patina
- All spillways are sized at 12" for maximum water flow and visual effect
- All Bowls feature dual 1½" FIPT inlets and solid copper standpipe for lighting and water supply

- Dual inlets allow water supply to be plumbed independently from lighting cords. Use Atlantic's Cord Seal Fitting to pass the light cord into the Bowl through the second inlet
- Solid Copper Pedestal accessory allows Bowls to be elevated 8"
- Copper Spillway Bowls are designed to work with the CFBASINKIT12
- Use a 12" Splash Ring on the 12" Formal Spillway Basin to control splash

73803

ITEM	73854	73853	73803	
MODEL	CB26S12	CB26R12	CB16P	
DESCRIPTION	26" Square Copper Bowl w/ 12" Spillway	26" Round Copper Bowl w/ 12" Spillway	Copper Pedestal for Copper Bowls	
FLOW RATE	1,200	gph		
INLET	(2) 1½	"FIPT		
DIMENSIONS	26"W x 27	16"L x 16"W x 8"H		
WARRANTY	3-year			



TECH TIP

Copper Bowls lend themselves to a number of lighting options. External Spotlights are a great way to accent water overflowing or the concentrated flow from spillways. Inside the bowl, the submersible Ring Light creates rippling uplighting effects on overhanging trees or structures. Install Atlantic's unique Cord Seal Fitting to make lighting inside the Bowl possible without a visible cord coming over the edge. The rubber fitting installs in the off-center 1½" FIPT inlet and expands when tightened, sealing the cord and the inlet. Page 113











73873


- Wall Spouts are an easy and elegant way to add the sight and sound of water to vertical surfaces
- Atlantic Wall Spouts complement larger spillways when paired; use alone to accent smaller spaces
- Solid brass fixtures add a captivating focal point to both traditional and contemporary walls and patios
- Choose from four architectural designs with oil rubbed bronze finish to fit any style
- Integrated drip edge prevents water from backflowing down the wall
- Includes grounding lug for bonded systems

ITEM	73871	73873	73875	73872			
MODEL	WSM-S	WSR-O	WSV-S	wso-o			
DESCRIPTION	Mantova Wall Spout	Ravenna Wall Spout	Verona Wall Spout	Olivett Wall Spout			
FINISH	Oil Rubbed Bronze						
FLOW RATE		600	gph				
PROJECTION*		14" - 16" at 18'	H & 600 gph				
INLET		11/2" [FIPT				
DIMENSIONS	5"W x 4¾"D x 5"H 5"W x 5¾"D x 6"H 7"W x 4¾"D x 7"H 6"W x 4½"D x 5"H						
WARRANTY	3-year						


 $^{^{\}star}$ Projection is measured from the face of the wall the Spout is mounted on

TECH TIP

Atlantic's unique Spout Lights illuminate the water from inside the plumbing. With 600 gallons per hour or more, the minimum flow required to submerge the light fixture in the plumbing, light is carried inside the laminar water flow. Page 123

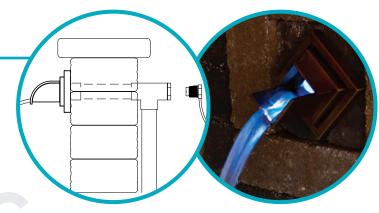







73886 (Ice Blue) 73888 (Crystal White) 73887 (SOL White)



73891 (Crystal White) 73890 (SOL White)

- Colorfalls produce a sheer of lighted water emerging from a concealed source inside vertical walls
- Colorfalls adapt to any wall material pavers, tile, brick, stone, wood – the only limit is your imagination
- Replaceable LED light bar available in three vibrant colors
- Colorfalls feature a 5" lip, 30' power cord and include a 12 volt outdoor transformer
- For use with Formal Spillway Basins and Basin Kits

ITEM	73883	73885	73884	73886	73888	73887	73889	73891	73890
MODEL	CF12B	CF12W	CF12SW	CF24B	CF24W	CF24SW	CF36B	CF36W	CF36SW
DESCRIPTION		12" Colorfalls			24" Colorfalls			36" Colorfalls	
COLOR	Blue	Crystal White	SOL White	Blue	Crystal White	SOL White	Blue	Crystal White	SOL White
FLOW RATE	1,000 gph			2,000 gph			3,000 gph		
PROJECTION*	13" - 15" at 18"H & 1,000 gph (Rec. Height: 20" max.)		13" - 15" at 18"H & 2,000 gph (Rec. Height: 30" max.)		13" - 15" at 18"H & 3,000 gph (Rec. Height: 40" max.)				
INPUT VOLTAGE					12 volt AC				
WATTS		3		6			9		
INLET					1½" FIPT				
DIMENSIONS	12"W x 8"D x 3½"H		24"W x 8"D x 31/2"H		1	36"W x 8"D x 3½"H		1	
WARRANTY		1-year							

 $^{^{\}star}$ Projection is measured from the face of the wall the Colorfalls is installed in

3 VIBRANT COLORS








ATLANTIC



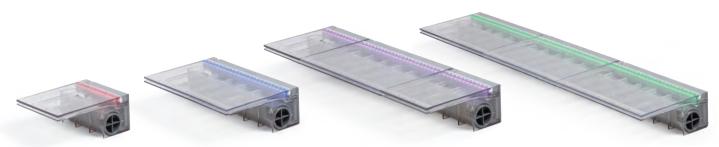

- Illuminated waterfalls are the most versatile way to add light and water to your landscape or hardscape
- · Atlantic's Color Changing Colorfalls are the first modular sheer descent system with multiple light and configuration options
- Design custom colors, select transitions and create personalized sequences with the InfiColor Smart Module and Atlantic Control App
- Unlike other sheer descent waterfalls, Atlantic Color Changing Colorfalls may be linked together to create waterfalls of any width
- Synchronize multiple Colorfalls with InfiColor Smart Module (CCSM30X3) and a larger transformer

- · Designed to install easily in any wall, indoors or out, whether stone, brick, block, stucco, tile or wood
- Atlantic's Color Changing Colorfalls' modular body style offers multiple inlets for maximum plumbing flexibility
- · Generous weir openings resist clogging and create a thicker, fuller sheer for extra color and less wind deflection
- Colorfalls feature a 5" lip, 20' power cord and includes single outlet InfiColor Smart Module and 12V outdoor transformer
- For use with Formal Spillway Basins and Basin Kits

ITEM	73878	73879	73880	73881			
MODEL	CC06	CC12	CC24	CC36			
DESCRIPTION	6" Color Changing Colorfalls	12" Color Changing Colorfalls	24" Color Changing Colorfalls	36" Color Changing Colorfalls			
FLOW RATE	600 gph	1,200 gph	2,400 gph	3,600 gph			
PROJECTION*	8" - 10" at 18"H & 600 gph (Rec. Height: 20" max.)	8" - 10" at 18"H & 1,200 gph (Rec. Height: 20" max.)	8" - 10" at 18"H & 2,400 gph (Rec. Height: 30" max.)	8" - 10" at 18"H & 3,600 gph (Rec. Height: 40" max.)			
INPUT VOLTAGE		InfiC	Color				
TRANSFORMER	10 watt (i	ncluded)	20 watt (included)				
WATTS	3	5	10	15			
INLET	1½" FIPT						
DIMENSIONS	6"W x 8"D x 3½"H	12"W x 8"D x 3½"H	24"W x 8"D x 3½"H	36"W x 8"D x 3½"H			
WARRANTY	1-year						

^{*} Projection is measured from the face of the wall the Colorfalls is installed in

COLOR CHANGING COLORFALLS FEATURES:

- 1. Large weir opening produces a thick sheer for less wind deflection, more color and less chance of clogging.
- 2. Internal lip supports eliminate splitting of the water sheer.
- 3. 11/2" FIPT inlets on both sides and back for maximum plumbing options and versatility.
- 4. Includes (2) 11/2" plugs for unused plumbing inlets.
- 5. Self-draining body for easy winterization.
- 6. Removable baffle for easy cleaning and servicing
- 7. Color Changing LED light bar is accessible from the rear of the unit for servicing.
- 8. Removable back plate provides access to the interior and light bar for routine maintenance.
- 9. Threaded adapter with silicone O-rings to connect multiple Color Changing Colorfalls.



SINGLE-ZONE INFICOLOR SMART MODULE & ATLANTIC CONTROL APP



The InfiColor Smart Module and Atlantic Control mobile application, the heart of the new Color Changing Lighting System, allow users to program custom color sequences and transitions, set sequence timing and daily scheduling and unlock all RGB options on any Apple or Android mobile device.

- Every Color Changing Colorfalls includes Single-zone InfiColor Smart Module
- Smart Module is wirelessly controlled via Atlantic Control App to unlock the full potential of Color Changing Lights, no remote necessary









The Atlantic Control App makes custom colors, sequences, transitions, timing and daily scheduling of your Atlantic Color Changing Lighting or Color Changing Colorfalls accessible on any Apple and Android mobile device, no remote necessary.

- Choose any color visually or create a custom color with RGB sliders
- Combine and save custom color sequences as Favorites
- · Assign one of five transitions and adjust the speed of any Favorite
- · Adjust brightness of sequences and solid colors if desired
- Built in timer function controls daily on and off times for LEDs
- Atlantic Control App available on all Apple and Android devices




DID YOU KNOW?

Thinking of adding a Color Changing Colorfalls to a new or existing hardscape? Check out our new Color Changing Colorfalls Project Bundle which includes everything needed to add the basin, plumbing. Colorfalls and even an Auto Fill! You choose the block, we provide the equipment! Page 21







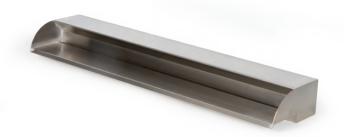

73859 73861 73863

- 316 Stainless Steel Spillways enhance any vertical wall in poolscapes, hardscapes and wherever chlorine is used as a disinfecting agent
- Modular design and convenient 4-inch height make Spillways ideal for garden wall block construction
- Readily adaptable to any vertical wall installation without cutting
- Built of heavy-gauge 316 stainless steel for durability under the harshest conditions
- Structural enclosure supports 80 lbs. per linear foot, for incorporation into masonry walls without lintels
- Non-clogging weir reduces maintenance in open basin applications

ITEM	73859	73861	73863		
MODEL	SS12-316	SS24-316	SS36-316		
DESCRIPTION	12" 316 Stainless Steel Spillway	24" 316 Stainless Steel Spillway	36" 316 Stainless Steel Spillway		
FLOW RATE	1,200 gph	2,400 gph	3,600 gph		
PROJECTION*	9" - 10" at 18"H & 1,200 gph	9" - 10" at 18"H & 2,400 gph	9" - 10" at 18"H & 3,600 gph		
INLET		1½" FIPT			
DIMENSIONS	12"W x 8½"D x 4"H	24"W x 8½"D x 4"H	36"W x 8½"D x 4"H		
WARRANTY	3-year				

^{*} Projection is measured from the face of the wall the Spillway is installed in


TECH TIP

316 Stainless Steel Spillways were specifically designed for use with chlorinated water. 316 stainless is much more resistant to corrosion than 304 stainless steel. Atlantic's 316 Stainless Steel Spillways feature an integrated grounding lug for use in bonded systems.







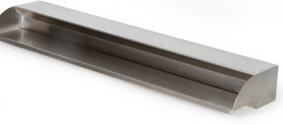

73858 73860 73862

73856



73855



- 304 Stainless Steel Spillways provide an enticing and durable focal point for fresh water applications in the hardscape
- Atlantic's copper finish and brushed stainless Spillways feature heavy-gauge construction for ageless durability
- Spillways replace 4-inch wall blocks for easy and convenient installation in standard wall block construction without cutting
- Lively, energetic water flow enhances any vertical wall installation $% \left(1\right) =\left(1\right) \left(1\right) \left($
- Load bearing body design supports 80 lbs. per linear foot for trouble free installations

73857

• Non-clogging weir reduces maintenance in open basin applications

ITEM	73858	73855	73860	73856	73862	73857	
MODEL	SS12	CS12	SS24	CS24	SS36	CS36	
DESCRIPTION	12" 304 Stainless Steel Spillway	12" 304 Copper Finish Spillway	24" 304 Stainless Steel Spillway	24" 304 Copper Finish Spillway	36" 304 Stainless Steel Spillway	36" 304 Copper Finish Spillway	
FLOW RATE	1,200	gph	2,400 gph		3,600 gph		
PROJECTION*	9" - 10" at 18"I	H & 1,200 gph	9" - 10" at 18"ŀ	1 & 2,400 gph	9" - 10" at 18"H & 3,600 gph		
INLET			1½" 1	-IPT			
DIMENSIONS	12"W x 81/2"D x 4"H 24"W x 8			/2"D x 4"H	36"W x 8	/ ₂ "D x 4"H	
WARRANTY	3-year						

^{*} Projection is measured from the face of the wall the Spillway is installed in

ATIANTIC







- Unique back-angled spout directs water downwards and onto wall below plumbing connection, to eliminate leaks, unwanted humidity and splash
- Revolutionary concept of spillway as a decorative focal point eliminates the need for valances
- Heavy-gauge 316 stainless steel construction ensures durability under even the harshest conditions

73876

- Bottom inlet accommodates wood-framed walls with masonry façades up to 1½" thick
- For masonry walls, cut channel in block below water wall to accommodate plumbing
- $1\frac{1}{2}$ " female threaded inlet and center rear bonding lug facilitate hidden in-wall plumbing connections

ITEM	73877	73876				
MODEL	SWS24-316	CWS24-316				
DESCRIPTION	24" Stainless Steel WaterWall Spillway	24" Copper Finish WaterWall Spillway				
FINISH	Brushed Stainless	Antique Copper				
FLOW RATE	Smooth Surfaces - 750-1500 gph /	Rough Surfaces - 1500-3000 gph				
INLET	11/2"	FIPT				
DIMENSIONS	24"W x 5¼"D x 3½"H					
WARRANTY	3-year					

DID YOU KNOW?

A new concept in water wall design, Atlantic's WaterWall Spillways eliminate the need for valances with an attractive stainless steel or copper finish that can be left visible, simplifying installation. Modular vertical spillways create water walls and weeping walls of any width in 24-inch increments, with seamless water flow between units.







73864 73865 73866

- Splash control is critical in small recirculating systems with little water volume
- Atlantic Splash Rings eliminate splash and reduce evaporation, prolonging time between fill ups
- Installed on the top of the basin, Splash Rings add a finished, architectural accent to Colorfalls, Wall Spout and Spillway displays
- Surround Splash Rings with decorative gravel for a finished look
- 304 stainless steel mesh and $\frac{3}{4}$ " stainless banding deliver years

ITEM	74973	73864	74226	73865	74974	73866
MODEL	CFSR12	CFCR12	CFSR24	CFCR24	CFSR36	CFCR36
DESCRIPTION	Stainless Steel Splash Ring for 12" Spillways	Copper Finish Splash Ring for 12" Spillways	Stainless Steel Splash Ring for 24" Spillways	Copper Finish Splash Ring for 24" Spillways	Stainless Steel Splash Ring for 36" Spillways	Copper Finish Splash Ring for 36" Spillways
FINISH	Brushed Stainless	Antique Copper	Brushed Stainless	Antique Copper	Brushed Stainless	Antique Copper
FOR USE WITH	CFBA	SIN12	CFBASIN24		CFBASIN36	
DIMENSIONS	16"W x 8"D x 1½"H		28"W x 8"D x 1½"H		40"W x 8½"D x 1½"H	
WARRANTY	3-year					



You provide the hardscape materials, we provide the rest! Atlantic's Project Bundles include all the Atlantic components you need, ready to be assembled into the water feature of your dreams. Build a beautiful Formal Spillway using your choice of stone. Please note products that are included in Project Bundles may not neccessarily come in the same box. Online videos make installation easy for contractors and first time builders alike.

COPPER SPILLWAY BOWL PROJECT BUNDLES







- Two Copper Bowl styles, round or square, and three Flexible Hardscape Basin colors accommodate various architectural styles
- Project Bundle shows Copper Spillway Bowl at 22" above water level, but plumbing will accommodate varying heights

• Bundles install directly into 4" x 8" x 12" stone enclosures, bu	t
adapt to a variety of engineered stone sizes	

• Project Bundles are an assembly of all Atlantic components

Bowl, Flexible Hardscape Basin, pump, plumbing and glue

needed to add a water feature to a new or existing hardscape

• Copper Spillway Bowl Project Bundles include 26" Copper Spillway

ITEM	MODEL	COPPER BOWL	BASIN	PUMP	TUBING
87767	BNDL CB26R12B	CB26R12 - 26" Round Copper Bowl w/12" Spillway	FF4216B - Black 4'W x 2'D x 16"H	TT1500	1½" x 9' Sch 40 Flexible PVC
87768	BNDL CB26R12G	CB26R12 - 26" Round Copper Bowl w/12" Spillway	FF4216G - Grey 4'W x 2'D x 16"H	TT1500	1½" x 9' Sch 40 Flexible PVC
87770	BNDL CB26R12T	CB26R12 - 26" Round Copper Bowl w/12" Spillway	FF4216T - Tan 4'W x 2'D x 16"H	TT1500	1½" x 9' Sch 40 Flexible PVC
87771	BNDL CB26S12B	CB26S12 - 26" Square Copper Bowl w/12" Spillway	FF4216B - Black 4'W x 2'D x 16"H	TT1500	1½" x 9' Sch 40 Flexible PVC
87772	BNDL CB26S12G	CB26S12 - 26" Square Copper Bowl w/12" Spillway	FF4216G - Grey 4'W x 2'D x 16"H	TT1500	1½" x 9' Sch 40 Flexible PVC
87773	BNDL CB26S12T	CB26S12 - 26" Square Copper Bowl w/12" Spillway	FF4216T - Tan 4'W x 2'D x 16"H	TT1500	1½" x 9' Sch 40 Flexible PVC

COLOR CHANGING COLORFALLS PROJECT BUNDLES





- Project Bundles are an assembly of all Atlantic components needed to add a water feature to a new or existing hardscape
- Color Changing Colorfalls Project Bundles include Color Changing Colorfalls, Formal Spillway Basin, pump, plumbing and glue
- Project Bundles shown with circle stone and 4" x 8" x 12" stone, but adapt to a variety of engineered stone sizes
- Choose from 3 different spillway widths and basin to fit any location
- Project Bundle shows Color Changing Colorfalls at 16" above basin level, but plumbing will accommodate varying heights

ITEM	MODEL	COLOR CHANGING COLORFALLS	BASIN	PUMP	TUBING
87755	BNDL CC12	12" Color Changing Colorfalls	CFBASINKIT12	TT1500	11/2" x 9' Sch 40 Flexible PVC
87756	BNDL CC24	24" Color Changing Colorfalls	CFBASINKIT24	TT3000	11/2" x 9' Sch 40 Flexible PVC
87757	BNDL CC36	36" Color Changing Colorfalls	CFBASINKIT36	TT4000	11/2" x 9' Sch 40 Flexible PVC

STAINLESS STEEL SPILLWAY PROJECT BUNDLES







- Project Bundles are an assembly of all Atlantic components needed to add a water feature to a new or existing hardscape
- Spillway Project Bundles include 304 Stainless Steel Spillway, Flexible Hardscape Basin, pump, plumbing and glue
- Bundles install directly into 4" x 8" x 12" stone enclosures, but adapt to a variety of engineered stone sizes
- Two Spillway options, brushed stainless or copper finish, and 3 Flexible Hardscape Basin colors adapt to any design scheme
- Project Bundle shows Spillway at 22" above water level, but plumbing will accommodate varying heights

ITEM	MODEL	SPILLWAY	BASIN	PUMP	TUBING
87762	BNDL SS24B	SS24 - 24" 304 Stainless Steel Spillway	FF4216B - Black 4'W x 2'D x 16"H	TT3000	1½" x 9' Sch 40 Flexible PVC
87763	BNDL SS24G	SS24 - 24" 304 Stainless Steel Spillway	FF4216G - Grey 4'W x 2'D x 16"H	TT3000	1½" x 9' Sch 40 Flexible PVC
87766	BNDL SS24T	SS24 - 24" 304 Stainless Steel Spillway	FF4216T - Tan 4'W x 2'D x 16"H	TT3000	1½" x 9' Sch 40 Flexible PVC
87758	BNDL CS24B	CS24 - 24" Copper Finish Spillway	FF4216B - Black 4'W x 2'D x 16"H	TT3000	1½" x 9' Sch 40 Flexible PVC
87759	BNDL CS24G	CS24 - 24" Copper Finish Spillway	FF4216G - Grey 4'W x 2'D x 16"H	TT3000	1½" x 9' Sch 40 Flexible PVC
87761	BNDL CS24T	CS24 - 24" Copper Finish Spillway	FF4216T - Tan 4'W x 2'D x 16"H	TT3000	1½" x 9' Sch 40 Flexible PVC

20 ATI ANTIC

(F) FOUNTAIN

Atlantic's Fountain Systems are the easiest, fastest, and strongest way to build a water feature on or into any horizontal surface. Heavy-duty matched components make setting, plumbing and running your feature simple. Components are designed to work together to beautify any landscape. With systems that will handle any size, any shape and any load, the only limit is your imagination!


- >> Systems can be installed in hardscapes or landscapes, in-ground or above-ground, indoors or outdoors for maximum versatility
- >> Fountain Basins with integrated internal supports handle more weight with greater stability
- >> Two sizes of Three Way Diverters make plumbing and flow control of multiple fountain pieces simple and easy
- » Topside plumbing and tubing channels allow for above water installation and adjustment, no need to get wet
- >> Eco-Rise System with Atlantic's Eco-Blox modular reservoirs support any weight, any size, and any number of decorative elements in any configuration
- >> Oase Water Entertainment delights the senses with illuminated laminar streams and dancing jets







- 1 Molded as one piece, support cones from the bottom of the basins are fused to the flat top panel, integrating the two planes for exceptional strength.
- 2 Large access door makes pump installation and maintenance easy.
- 3 Complete plumbing kits for decorative items include flow controls and pump connections for FP, MD and TT Pumps.
- 4 3-Way Diverters split pump flow to three outlets. True ball valves with removable handles enable independent flow adjustments to each outlet without moving the decorative gravel.









8 Pair Warm White and Color Changing Lighting with Fountain Systems to add dramatic appeal after dark.













- Fountain Basins support decorative features while concealing water reservoir, pump, plumbing and accessories
- Atlantic Fountain Basins are the easiest way for anyone to add a water feature to your landscape, ideal for both the beginners and the professional
- Easily installed, Basins may be set at, above or below grade in landscapes, hardscapes, poolscapes and interiors
- Recessed channels allow fast installation of 1" tubing, up to 1½" in the center channel (FB3500 & FB4700), without fear of kinking and crushing

92802

- Square corners provide more usable area for decorative toppers
- Reinforced injection molded pump access panel provides support without warping or shifting (FB3500 & FB4700)

ITEM	74958	92803	92802
MODEL	FB2400	FB3500	FB4700
DESCRIPTION	24" Fountain Basin	35" Fountain Basin	47" Fountain Basin
DIMENSIONS	24"L x 24"W x 10"H	35"L x 35"W x 13"H	47"L x 47"W x 13"H
MAX PUMP FLOW	750 gph	2,000 gph	4,000 gph
PLUMBING SIZE	Up to ¾"	up to 1½"	up to 1½"
CAPACITY	20 gallons	42 gallons	75 gallons
MAX LOAD	200 lbs.	600 lbs.	1,200 lbs.
WARRANTY		Lifetime	_

FOUNTAIN BASIN FEATURES:

- 1. One-piece rotomolded construction provides exceptional strength.
- 2. Built-in channels protect plumbing below the top of the basin, no crushing or kinking and fit 1½" elbows in the center channel (FB3500/FB4700).
- 3. Closely spaced cones, 19 in the FB4700 and 7 in the FB3500, connect directly to the top panel for greater stability.
- 4. Topside valve pocket holds adjustment valves and 3-Way Diverters to individually adjust flows above water level.
- 5. 1½" conduit recess in perimeter allow for clean installations in surrounding masonry without notching (FB3500 & FB4700).
- 6. Flat panel accommodates optional AF1000 Automatic Fill Valves.



92802 shown

TRITON 3-WAY DIVERTER



- 73814 ITEM MODEL TR3WAY DESCRIPTION 3-Way Diverter for Fountain Basin 53/8"L x 41/2"W x 27/8"H **DIMENSIONS** INLET 11/2" FIPT OUTLET (3) ¾" Insert **INCLUDES** (2) removable "T" handles **FOR USE WITH** FB4700 WARRANTY
- Atlantic Triton 3-Way Diverter works with the FB4700 Fountain Basin to provide individual flow control to multiple fountain pieces
- Diverter allows adjustment above water level without having to access the pump inside the pump chamber
- The $1\frac{1}{2}$ " inlet allows unrestricted flow into the Diverter and out to three valved outlets
- Ball valves with removable handles enable independent flow adjustment of each outlet

PLUMBING KITS



93457

- Atlantic's Plumbing Kits facilitate installation and adjustment of flow to decorative toppers with precisely engineered specialty fittings
- Compact 1½" male thread by spigot elbows mount pumps in Fountain Basins, Vaults and Flexible Basins at exactly the right height
- 1½" Universal Union with choice of outlets 1½" socket, 1½" male thread or 1" socket offer unparalleled versatility in mounting and dismounting pumps and toppers



93456

- All components made of Sch40 PVC for complete compatibility with standard fittings
- FBKIT1 includes all necessary fittings to plumb single Aura Vases or other single features on Fountain Basins
- Use FBKIT3 to plumb Basalt Columns or up to three smaller features on Fountain Basins

ITEM	93457	93456				
MODEL	FBKIT1	FBKIT3				
DESCRIPTION	Fountain Basin Plumbing Kit - Single	Fountain Basin Plumbing Kit - Triple				
FOR USE WITH	MD1000 - MD1500 & TT1500 - TT2000	MD1000 - MD1500 & TT1500 - TT3000				
VALVE	Single	Triton 3-Way Diverter				
TUBING	9' of 1" Flexible PVC	20' of ¾" Kink-free				
STANDPIPE SEALANT	(1) strip	(3) strips				
FITTINGS	1½" Pump Discharge, 1½" Single Union Ball Valve, 1½" Universal Union (soc x soc / mpt)	1½" Universal Union (soc x soc / mpt), 1½" Pump Discharge, 3-Way Diverter (TR3WAY / 73814)				
CORD STOPPER	1½" for conduit sleeve					
WARRANTY	1-у	ear				

ATIANTIC 25



ECO-RISE



88837



74970

- Atlantic's innovative weight distribution risers raise and support fountain pieces directly on Eco-Blox Reservoirs
- Pipe and cord chases provide space for plumbing and light cords to pass under and into decorative pieces without damage
- ${\:\raisebox{3.5pt}{\text{\circle*{1.5}}}}$ The Eco-Rise System solves weight and splash limitations of traditional molded fountain basins with a weight capacity of 1,200 or 3,000 pounds per respective Eco-Rise
- Reinforced radial structure distributes the weight of statuary, vases and columns over multiple Eco-Blox vertical support panels
- Inverted design of 12" injection molded Eco-Rise allows pre-plumbed, drop-in installation of decorative pieces

ITEM	88837	74970			
MODEL	ECORISE12	ECORISE20			
DESCRIPTION	12" Eco-Rise Water Feature Riser	20" Eco-Rise Water Feature Riser			
DIMENSIONS	12"W x 12"D x 2¾"H	20"W x 20"D x 3"H			
PLUMBING SIZE	3/4" to 11/2"				
MAX LOAD	1,200 lbs.	3,000 lbs.			
WARRANTY	Lifetime				

DID YOU KNOW?

If you need to supply and adjust the flow from one pump to three bubblers, you could go to the store, find all the fittings, spend \$80, cut the nipples, clean, prime and glue everything together, make the assembly fit and somehow hide the valve handles - and you'll end up with THIS - or you can buy the Eco-Rise Diverter for half the money, no messy assembly and it's easier to hide. Don't forget to remove the handles!



ECO-RISE DIVERTER & PLUMBING KIT



ITEM	89581	90163			
MODEL	ER3WAY	ERKIT3			
DESCRIPTION	Eco-Rise Diverter 3 x 1"	Eco-Rise Plumbing Kit (Triple)			
DIMENSIONS	9¾"W x 6"D x 4"H				
INLET	1½" socket / 2" spigot				
OUTLET	(3) 1" socket				
MAX FLOW	3,750 gph				
INCLUDES	(3) removable "T" handles	Eco-Rise Diverter, 25' of 1" Flexible PVC, (3) 1½" x 1" Reducer Bushings			
WARRANTY	1-year				

- Diverters split a single source to multiple adjustable outlets
- Atlantic's revolutionary Eco-Rise Diverter accepts 1½" or 2" plumbing and provides 3 valved 1" outlets for ultimate flow control
- Single union ball valves accommodate 1" Sch40 PVC and have removable handles to hide valve and prevent tampering
- · Economical diverter saves time, space and money over traditional manifolds
- Seemlessly integrating with newly redesigned PV7500 Pump Vault, Diverter mounts directly into the recessed pockets in the top of the vault
- Eco-Rise Plumbing Kit includes Eco-Rise Diverter, 25' of 1" Flexible PVC Pipe and three 1½" x 1" reducer bushings for connection to all Aura Vase and Hammered Brass Bowls

ECO-RISE SYSTEM

- Eco-Rise System features new 12" Eco-Rise, PV7500 Pump Vault, Small Eco-Blox and Eco-Rise Diverter
- · Create lined reservoirs of any size by combining the Eco-Rise components with underlayment and EPDM liner
- Small Eco-Blox, 12" Eco-Rise and Eco-Rise Diverter make System easier to install than before, require less excavation and deliver
 - 1. Create reservoirs of practically any size, shape or volume, supporting any number of decorative items with Eco-Blox Water Matrix Blocks in a lined excavation


2. Small Eco-Blox at 9" tall require half the excavation but maintain full weight capacity of Large Eco-Blox

pump vault, using dual pumps and dual Eco-Rise Diverters 4. Eco-Rise raises, supports and allows effortless adjustment of decorative items without damage

5. Mounted into molded pocket, Eco-Rise Diverter directs up to 1,250 gph per 1" outlet to each of up to 3 high flow features

6. Plumb and illuminate any size, number or configuration of decorative fountain pieces

to lighting and plumbing

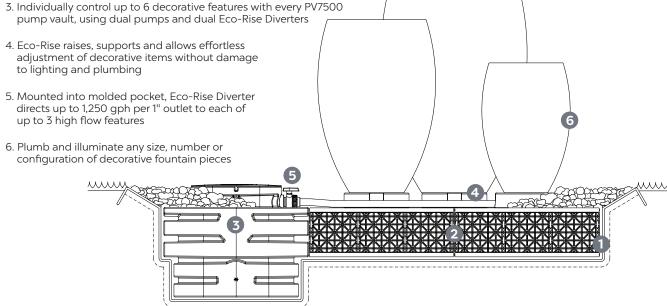



BRASS BOWLS







88832 88833

- Fountain Bowls compliment any landscape, hardscape or poolscape with the timeless beauty of brass
- Atlantic Hammered Brass Bowls are handcrafted of solid brass in two styles, with matching pedestal for dual bowl installations
- Unlike painted treatments, acid wash finish permanently imparts an attractive, unique patina that will not chip or peel
- Solid brass standpipes create a bubbling fountain effect at the top of both overflowing and spillway styles and support Atlantic Ring Lights


88834

• Dual 1½" inlets allow water supply to be plumbed independently of lighting cords using Atlantic's Cord Seal Fitting

ITEM	88832	88833	88834			
MODEL	. HB30R4VB HB36R0VB		НВ16PVВ			
DESCRIPTION	30" Bowl w/ 4" Spillway - Verde Brass	36" Bowl - Verde Brass	16" Pedestal - Verde Brass			
DIMENSIONS	30"W x 33"D x 14½"H	36"W x 14½"H	16"L x 16"W x 8"H			
FLOW RATE	400 gph	2,000 - 3,000 gph				
INLET	(2) 1½" FIPT					
FOR USE WITH	FB4600/Eco-Rise System					
WARRANTY		3-year				

DID YOU KNOW?

Atlantic's Hammered Brass offers some significant advantages over other materials. Time-honored brass has always been a favorite for sculptors and artists for its strength and durability. Impervious to winter and weather, brass is a non-reactive metal that does not corrode and whose patina deepens naturally over time. To kickstart the natural process, acid washing permanently imparts an attractive patina that cannot chip or peel, unlike painted finishes.




BRASS BOWL KIT



- Verde Brass Bowl Kits come with everything needed to create stunning water features in very little time
- The secret lies in the newly redesigned Eco-Rise System, with Small Eco-Blox, Pump Vault, Eco-Rise Diverter and Eco-Rises to minimize excavation and effort
- Included Eco-Rise Diverter accommodates Sch40 1" PVC for high flow and maximum durability with single union valves for convenient adjustment
- Includes Triton Check Valve, fittings, teflon tape and glue for complete installation

ITEM	92709
MODEL	FKHBB30-36VB
DESCRIPTION	2 Pc Bowl Kit - 30/36 - Verde Brass
TUBING SIZE	25' of 1" & 21" of 1½" Flexible PVC
LINER SIZE	13' x 13'
PUMP VAULT	PV7500
UNDERLAYMENT	(2) 12' x 12'
ECO-BLOX	(5) ECOBLOX-SMALL
ECO-RISE	ECORISE12 & ECORISE20
PUMP	TT4000
WARRANTY	3-year



TECH TIP

To ensure a perfect installation every time, detailed technical drawings precisely outline procedures and specifications. In drawing at left the layout of the components including the tubing, fittings and structural base are all clearly indicated, simplifying installation. Find similar drawings highlighting what you need to know for seamless installation in our Techincal Data section. You can find our Hammered Brass Bowl Kit drawing on page 161.

ATLANTIC





- Vases complement any landscape, hardscape or poolscape with the timeless beauty of brass
- Atlantic Aura Vases are crafted of solid brass by hand in two styles, with and without spillways, in threee sizes, each a unique piece of art
- New Antique Brass finish lends a lustrous, classic feel adn perfectly complements copper toned WaterWalls, Spillways and Spouts
- Unlike painted treatments, acid washing permanently imparts an attractive, unique finish that will not chip or peel
- Solid brass standpipes create a bubbling fountain effect at the top of both overflowing and spillway styles and support Atlantic Ring Lights
- Dual threaded inlets allow water supply to be plumbed independently from lighting cords using Atlantic's Cord Seal Fitting

ITEM	88826	99124	88827	88828	99125	88829	88830	99126	88831
MODEL	AV24VB	AV24AB	AV24HB-S	AV32VB	AV32AB	AV32HB-S	AV40VB	AV40AB	AV40HB-S
DESCRIPTION	24" Aura Vase - Verde Brass	24" Aura Vase - Antique Brass	24" Aura Vase - 4" Spillway	32" Aura Vase - Verde Brass	32" Aura Vase - Antique Brass	32" Aura Vase - 6" Spillway	40" Aura Vase - Verde Brass	40" Aura Vase - Antique Brass	40" Aura Vase - 8" Spillway
FLOW RATE	500 - 1,000 gph 400 gph			750 - 1,500 gph 600 gph			1,000 - 2,000 gph 800 gph		
INLET		(2) 1½" FIPT							
DIMENSIONS	16¼"W x 24"H			21¾"W x 32"H			27"W x 40"H		
WARRANTY					3-year				

AURA VASE KITS





93835 99135

93836





93837 99136

93838





92707 99137

37

- Aura Vase Kits come with two basin options, each with specially designed fittings, to create stunning water features quickly and easily
- In all Kits an individual valve controls flow to each Vase, then its handle removes to prevent tampering
- Single Aura Vase Kits feature Pump, Fountain Basin and Plumbing Kit with discharge elbow and single union valve

92708

- 3-piece Aura Vase Kits utilize Eco-Rise System with Pump, Pump Vault, Small Eco-Blox, 12" Eco-Rise and Plumbing Kit with Triton Check Valve and Eco-Rise Diverter
- Kits include 1" Sch40 Flexible PVC for high flow and maximum durability and custom fittings for complete installation

ITEM	93835	99135	93836	93837	99136	93838	92707	99137	92708
MODEL	FKAV32VB	FKAV32AB	FKAVS32	FKAV40VB	FKAV40AB	FKAVS40	FKAVX3VB	FKAVX3AB	FKAVSX3
DESCRIPTION	32" Aura Vase Kit - Verde Brass	32" Aura Vase Kit - Antique Brass	32" Aura Vase w/ Spillway Kit	40" Aura Vase Kit - Verde Brass	40" Aura Vase Kit - Antique Brass	40" Aura Vase w/ Spillway Kit	3 Pc. Aura Vase Kit - Verde Brass	3 Pc. Aura Vase Kit - Antique Brass	3 Pc. Aura Vase Kit w/ Spillways
BASIN	FB3500 FB4700								
PUMP	TT1500 MD1000			TT2000 TT150		TT1500	TT4000 TT200		TT2000
PLUMBING KIT		FBKIT1					ERKIT3		
LINER SIZE			-				13' x 13'		
PUMP VAULT							PV7500		
UNDERLAYMENT								(2) 12' x 12'	
ECO-BLOX						(5) ECOBLOX-SMA	LL	
ECO-RISE							(3) ECORISE12		
WARRANTY					3-year				

ATIANTIC 31















- Geometric spheres add an ageless, classical touch to garden and patio waterscapes
- Atlantic Brass Spheres are hand-hammered of solid brass in two sizes, each available with the original Verde Brass patina or Antique Brass finish
- Unlike painted treatments, acid washing permanently imparts and attractive, unique finish that will not chip or peel

99130

- Solid brass standpipes create a bubbling fountain effect at the top of the Spheres and support Atlantic Ring Lights
- Dual threaded inlets allow water supply to be plumbed independently from lighting cords using Atlantic's Cord Seal Fitting

ITEM	99127	99128	99129	99130				
MODEL	SPH24VB	SPH24AB	SPH30VB	SPH30AB				
DESCRIPTION	24" Sphere - Verde Brass	24" Sphere - Antique Brass	30" Sphere - Verde Brass	30" Sphere - Antique Brass				
FLOW RATE	1,000 - 2,	000 gph	1,500 - 2,500 gph					
INLET		(2) 1½" FIPT						
DIMENSIONS	24"W	x 24"H	30"W x 30"H					
WARRANTY	3-year							

BRASS SPHERE KITS





99131





99133

- Sphere Kits come with two basin options, each with specially designed fittings, to create stunning water features quickly and easily
- In all Kits an individual valve controls flow to each Sphere, then its handle removes to prevent tampering
- 99134

99132

- Sphere Kits feature Pump, Fountain Basin and Plumbing Kit with discharge elbow and single union valve
- Kits include 1" Sch40 Flexible PVC for high flow and maximum durability and custom fittings for complete installation

ITEM	99131	99132	99133	99134			
MODEL	FKSPH24VB	FKSPH24AB	FKSPH30VB	FKSPH30AB			
DESCRIPTION	24" Sphere Kit - Verde Brass	24" Sphere Kit - Antique Brass	nere Kit - Antique Brass 30" Sphere Kit - Verde Brass 36				
BASIN	FB3	500	FB4700				
PUMP	TT1!	500	TT2000				
PLUMBING KIT	FBKIT1						
WARRANTY		3-у	ear				

ATI ANTIC ATI ANTIC



BASALT COLUMNS



- 73778
- Hexagonal pillars have a sawn base for stability and snapped top that emphasizes the stone's natural beauty

• Attractive natural stones are drilled to create overflowing

91802

water features

- Volcanic basalt oxidizes to form attractive multi-colored patina
- Atlantic's Basalt Columns are generously core-drilled to 1¾" to fit up to 1" Sch 40 PVC or 3/4" kink-free tubing plus a light cord

73780

- A 2" diameter, 5" deep socket at the top recesses Atlantic's Fountain Light (page 116) and buffers the water plume
- Available in single or three piece sets for design flexibility

ITEM	91802	73778	73779	73780	92241	73781		
MODEL	NBC18 NBC24		NBC30	NBC36	NBCX3-1830	NBCX3-2436		
DESCRIPTION	18" Natural Basalt 24" Natural Basalt Column Column		30" Natural Basalt Column	36" Natural Basalt Column	3 Pc Natural Basalt Columns - 18/24/30	3 Pc Natural Basalt Columns - 24/30/36		
ESTIMATED WEIGHT	92 lbs.	122 lbs.	155 lbs.	188 lbs.	367 lbs.	463 lbs.		
APPROXIMATE DIMENSIONS	10"W x 18"H	10"W x 24"H	10"W x 30"H	10"W x 36"H				
RECOMMENDED BASIN SIZE	FB2400		FB3500		FB4700			
RECOMMENDED PUMP	FP400		FP500		TT2000			
RECOMMENDED PLUMBING KIT			FBI	KIT3				
WARRANTY		3-year						

73779

BASALT COLUMN KITS





73809 92242



73811

- Atlantic Basalt Kits have everything included to create a natural stone water feature with minimal time and effort
- The plumbing sits directly on top of the basin protected in recessed channels so there is no chance crushing the tubing during installation
- Choose from single 24" and 30" tall Basalt Kits or triple Basalt Kits with 18" to 30" or 24" to 36" columns for installations in a range of locations
- Add Fountain Lights (page 122) to create an illuminated torch effect after dark

ITEM	73809	92242 73811				
MODEL	FKNBC24	FKNBCX3-1830 FKNBCX3-2436				
DESCRIPTION	24" Natural Basalt Kit	3 Pc Natural Basalt Kit 3 Pc Natural Basalt				
ESTIMATED WEIGHT	190 lbs.	399 lbs. 499 lbs.				
APPROXIMATE DIMENSIONS	10"W x 24"H					
BASIN	FB2400	FB3500	FB4700			
PUMP	FP400	ТТ2000				
PLUMBING KIT	¾" Kink-free Tubing & (1) Standpipe Sealant	t FBKIT3				
WARRANTY		3-year				



DID YOU KNOW?

Did you know Atlantic's Basalt Columns have a larger bore hole, a full 2" diameter at the top 5" deep, to minimize splash and turbulence and to accommodate Atlantic's Fountain Light? The rest of the column is bored to a generous 1%" diameter, to accommodate ¾" Kink-free tubing and the cord of the Fountain Light. The epoxy encased Fountain Light generates a warm white flood of illumination at 2800K to integrate perfectly with existing warm white lighting. Page 122.









- Water entertainment combines water and light to bring pleasing sound and stimulating movement to the landscape or hardscape
- Oase Water Trio and Quintet include everything you need to create an enchanting water feature right out of the box
- Nine pre-programmed effects vary both fountain height and lighting
- Robust floor plate adapts to a wide variety of substrates and protects unit against damage



50354

- Each individually adjustable nozzle projects a ¼" jet illuminated by 6 warm white LEDs
- Compact, easy to conceal external control system features a remote with a range of up to 250 feet without obstruction and can connect up to 10 systems



ITEM	50353	50354					
DESCRIPTION	Water Trio	Water Quintet					
MAX HEIGHT	5	5"					
WATTS	40	50					
MIN DEPTH	31	31/4"					
MAX DEPTH	1	11"					
CORD LENGTH	8' + 26'						
DIMENSIONS	8½"L x 7¼"W x 12"H - Base / 8½	8½"L x 7¼"W x 12"H - Base / 8½"L x 7¼"W x 12"H - Control Box					
INCLUDES		ernal control unit with weather resistant cover, ground stake, oor transformer					
WARRANTY	2-ye	ar + 1					

DID YOU KNOW?

Both the Trio and Quintet can be disassembled and unmounted from the floor plate to enter Creative Mode. Simply remove the cover and unscrew the pumps from the floor plate. The generous 22' cables allow each pump and nozzle assembly to be located remotely in any configuration you desire. Pumps may be set as deep as 11" below the surface of the water with included 4" extensions.









73789

73792

73795

73786

73798

73801







73788			
73791			
73794			
73785			
73797			
73800			

73793 73796 73787 73799 73802

- Flexible Basins instantly create open reservoirs below grade or inside raised walls
- Atlantic's Flexible Fountain Basins are designed to work with most popular manufactured wall stones and colors
- Reinforced PVC construction with fold out flaps and punched glue points anchors liner under capstones for security and durability
- Unlike improvised EPDM liner basins, welded corner construction eliminates folds and wrinkles for a neat professional appearance
- Welded PVC cord channel hides pump and light cords for a clean and attractive installation

73790

- Basins are available in tan, grey and black to complement any surround up to eight-feet wide
- Can be used with Atlantic Fountain Nozzles, Copper Bowls and Formal Spillway products - Spillways, WaterWalls and Spouts
- Open basins not recommended for use with Colorfalls, unless a FiltoClear is used in combination, see page 56

ITEM	MODEL	DESCRIPTION	COLOR	DIMENSIONS	CAPACITY	WARRANTY
73788	FF4416B		Black			
73789	FF4416G	4' Square Flexible Fountain Basin	Grey	4'W x 4'L x 16"H	160 gallons	1-year
73790	FF4416T		Tan			
73791	FF4616B		Black			
73792	FF4616G	4' x 6' Rectangular Flexible Fountain Basin	Grey	4'W x 6'L x 16"H	240 gallons	1-year
73793	FF4616T		Tan			
73794	FF4816B		Black		320 gallons	
73795	FF4816G	4' x 8' Rectangular Flexible Fountain Basin	Grey	4'W x 8'L x 16"H		1-year
73796	FF4816T		Tan			
73785	FF4016B		Black	4'W x 16"H	125 gallons	1-year
73786	FF4016G	4' Round Flexible Fountain Basin	Grey			
73787	FF4016T		Tan			
73797	FF6016B		Black			
73798	FF6016G	6' Round Flexible Fountain Basin	Grey	6'W x 16"H	280 gallons	1-year
73799	FF6016T		Tan			
73800	FF8016B		Black			
73801	FF8016G	8' Round Flexible Fountain Basin	Grey	8'W x 16"H	500 gallons	1-year
73802	FF8016T		Tan			



4-PATTERN NOZZLE SET

- Nozzles create decorative displays of water in small reservoirs
- Oase Nozzle Set creates attractive displays connected directly to Fountain Pumps with ½" MIPT outlets
- Aerates and decorates ponds, fountains, and containers
- Diverter valve with adjustable flow control allows for separate circulation of reservoir during operation of fountain nozzle
- 4-Pattern Nozzle Set features telescoping nozzle, diverter valve, flow control and 4 different heads that are easily interchangeable




ITEM	DESCRIPTION	MIN HEIGHT	MAX HEIGHT	INLET	INLET FOR USE WITH	
51262	4-Pattern Nozzle Set	11"	15¾"	½" FIPT	Fountain Pumps with ½" MIPT outlets	1-year

VULKAN 37-2.5 K

• Creates a dramatic, eye-catching vertical spray

• Made of durable plastic

ITEM	DESCRIPTION	INLET	DIMENSIONS	WARRANTY
55882	Vulkan 37-2.5 K	1" MIPT	3"W x 6"H	1-year






NOZZLE EXTENSION

- · Allows adjustment of Fountain Nozzle display height
- Telescoping Extension is constructed of durable plastic

ITEM	DESCRIPTION	MIN HEIGHT	MAX HEIGHT	INLET	WARRANTY
53227	Nozzle Extension	11"	20"	1" MIPT	1-year



Oase Professional Fountain Nozzles direct water in decorative patterns or shapes in larger fountain applications. Made of high quality brass

and stainless steel, these commercial grade nozzles all perform well in fresh water; check the bullets for which to use in non-freshwater applications. Level dependent Nozzles must be set at the recommended water level to achieve the described performance and appearance.

- GPMs and GPHs
- Head heights
- Specifying guidelines
- Design considerations
- Dimensional drawings



SCHAUMSPRUDLER - FROTHY

- · Schaumsprudler or Frothy Nozzles generate a thick, wind resistant display that uses little water
- · Foamy white water offers a strong contrast to surroundings while enriching oxygen content
- Fresh water only (53224, 50986, 50987), Fresh & pool water (50768); water level independent





ITEM	DESCRIPTION	INLET	FOR USE WITH	DIMENSIONS	REQUIRES	WARRANTY
53224	Frothy 35-10 E	1"	Fresh water only	2%"W x 6%"H	-	3-year
50986	Schaumsprudler 55 - 10 E	1" G	Fresh water only	3¼"W x 7"H	51026 - G/NPT Adapter	2-year
50987	Schaumsprudler 55 - 15 E	1½" G	Fresh water only	3¼"W x 7"H	51027 - G/NPT Adapter	2-year
50768	Schaumsprudler 75 - 20 Silver	2" G	Fresh & pool water	4"W x 9½"H	51028 - G/NPT Adapter	2-year

FAN JET

- Fan Jet Nozzles create a thick veil of water useful for concealing unwanted views
- Three sizes create heavy fans of gushing water, 1/4" and 5/16" thick respectively
- For fresh, pool and sea water; water level independent





ITEM	DESCRIPTION	INLET	FOR USE WITH	DIMENSIONS	REQUIRES	WARRANTY
53056	Fan Jet 10 - 6 E	1" G	Fresh, pool & sea water	2¾"L x 1¾"W x 4¾"H	51026 - G/NPT Adapter	2-year
53047	Fan Jet 15 - 8 E	1½" G	Fresh, pool & sea water	4"L x 2"W x 6"H	51027 - G/NPT Adapter	2-year



COMET

- Comet nozzles generate a single clearwater jet that is stable in wind
- Use singly or in groups, using pivoting ball joint to adjust display up to 15° off vertical
- Small to medium sized nozzles generate fountain jet heights from 20" to 43'
- Fresh water only; water level independent



ITEM	89012	89013	89014	89015	89016	89017	89018
DESCRIPTION	Comet 3 - 6 T / NPT	Comet 5 - 8 T / NPT	Comet 5 - 10 T / NPT	Comet 10 - 12 T / NPT	Comet 10 - 14 T / NPT	Comet 15 - 17 T / NPT	Comet 15 - 20 T / NPT
INLET	%" MIPT	½" MIPT	½" MIPT	1" MIPT	1" MIPT	1½" MIPT	1½" MIPT
FOR USE WITH				Fresh water only			
DIMENSIONS	%"W x 2¼"H	1¼"W x 3½"H	1¼"W x 3½"H	1¾"W x 4¾"H	1¾"W x 4¾"H	2½"W x 6"H	2½"W x 6"H
WARRANTY	2-year						

LAVA

- Lava Nozzles create a quiet bell of transparent water
- Attractive, adjustable closed water veil is best used indoors or in areas protected from wind
- Modern stainless steel Lava Nozzles are particularly attractive when illuminated
- Fresh water only; water level independent





ITEM	DESCRIPTION	INLET	FOR USE WITH	DIMENSIONS	REQUIRES	WARRANTY
50889	Lava 30 - 10 E	1" G	Fresh water only	3¼"W x 13¼"H	51026 - G/NPT Adapter	2-year
50890	Lava 45 - 10 E	1" G	Fresh water only	3¼"W x 19"H	51026 - G/NPT Adapter	2-year
50891	Lava 60 - 10 E	1" G	Fresh water only	3¼"W x 25"H	51026 - G/NPT Adapter	2-year

ROTATING NOZZLES

- Rotating Nozzles create gracefully dancing fountains of rotating screw-shaped water patterns
- 5 individual Comet Nozzles adjust for a wide variety of wind-stable water patterns
- Diagonally set nozzles rotate nozzle head on ball bearings
- Fresh water only; water level independent





ITEM	DESCRIPTION	INLET	FOR USE WITH	DIMENSIONS	REQUIRES	WARRANTY
50967	Rotating Nozzle 5 - 15 E	1½" G	Fresh water only	9%"L x 5%"W x 8"H	51027 - G/ NPT Adapter	2-year
50473	Rotating Nozzle 5 - 30 E	3" G	Fresh water only	15"L x 10"W x 13½"H	51029 - G/NPT Adapter	2-year

FINGER NOZZLE

- ${\boldsymbol \cdot}$ Finger Nozzles generate seven clear single stream jets that are resistant to wind deflection
- Stainless steel multi-jet nozzle achieves a maximum fountain height of 13'
- For fresh, pool and sea water; water level independent





ITEM	DESCRIPTION	INLET	FOR USE WITH	DIMENSIONS	REQUIRES	WARRANTY
51110	Finger Nozzle 7 - 15 E	1½" G	Fresh, pool & sea water	6½"L x 2"W x 6½"H	51027 - G/NPT Adapter	2-year

TRUMPET JET

- Trumpet Jet with single tall center column surrounded by arching sprays is wind stable
- Fresh water only; water level independent





ITEM	DESCRIPTION	INLET	FOR USE WITH	DIMENSIONS	REQUIRES	WARRANTY
5037	Trumpet Jet 30	3" G	Fresh water only	3½"W x 10%"H	51029 - G/ NPT Adapter	2-year

OASE



VULCAN 300

- Vulcan 300 generate a bundle of tiered, clear jets that are stable in wind
- 19 Comet nozzles can be adjusted individually as desired or removed for cleaning
- Fresh and pool water; water level independent





ITEM	DESCRIPTION	INLET	FOR USE WITH	DIMENSIONS	REQUIRES	WARRANTY
50977	Vulcan 300 / 19 - 8 Silver	3" G	Fresh & pool water	11%"W x 10%"H	51029 - G/ NPT Adapter	2-year

VULCAN 43 - 3

- Vulcan 43 3 Nozzles generate attractive tiered patterns with individual wind stable jets
- Nozzle can be disassembled for easy cleaning
- Fresh and pool water; water level independent





ITEM	DESCRIPTION	INLET	FOR USE WITH	DIMENSIONS	REQUIRES	WARRANTY
50766	Vulcan 43 - 3 Silver	1" G	Fresh & pool water	3½"W x 4½"H	51026 - G/ NPT Adapter	2-year

GRAND VULCAN 30

- Grand Vulcan is a multi jet nozzle whose clear single jets resist wind deflection
- · Circular arrangement of jets maintain a consistent height with one another
- Fresh water only; water level independent





ITEM	DESCRIPTION	INLET	FOR USE WITH	DIMENSIONS	REQUIRES	WARRANTY
50376	Grand Vulcan 30	3" G	Fresh water only	3½"W x 10"H	51029 - G/ NPT Adapter	2-year

CLUSTER ECO

- Cluster Eco Nozzles generate a single voluminous water jet by combining many smaller jets
- Oase deflecting blade technology stabilizes display; efficient nozzles lower water consumption
- Cluster Eco nozzles with 21 and 64 single jets respectively create single columns up to 33' high
- For fresh and pool water; water level independent



ITEM	DESCRIPTION	INLET	FOR USE WITH	DIMENSIONS	REQUIRES	WARRANTY
15480	Cluster Eco 15 - 38	1½" G	Fresh & pool water	2"W x 4¼"H	51027 - G/NPT Adapter	2-year
51882	Cluster Eco 30 - 67	3" G	Fresh & pool water	3%"W x 6"H	51029 - G/NPT Adapter	2-vear

G/NPT ADAPTERS

- G/NPT Adapters convert BSPP/G (British Standard Pipe Parallel) to US standard NPT (National Pipe Thread)
- For use in fresh and pool water




ITEM	DESCRIPTION	INLET/OUTLET	DIMENSIONS	WARRANTY
51026	Adapter G 10 / NPT 10 Silver	1"	1¾"W x 1½"H	2-year
51027	Adapter G 15 / NPT 15 Silver	1½"	2"W x 1%"H	2-year
51028	Adapter G 20 / NPT 20 Silver	2"	2½"W x 2½"H	2-year
51029	Adapter G 30 / NPT 30 Silver	3"	3¾"W x 3"H	2-year



(PF) POND-FREE

Atlantic's Pond-free System makes below ground reservoir construction simpler, easier and more reliable. Sturdy Pump Vaults, Extensions and Eco-Blox create underground reservoirs that are stronger and safer than ever before. Above ground, FastFalls lead the industry with unmatched weight capacities and virtually leak-proof design. Innovative components make Atlantic's family of Pond-free products the best ever built.

- » Strongest water matrix blocks, vaults and spillways in the industry for longevity and peace of mind
- » Modular reservoir system creates water features of any size for the greatest versatility
- » Kits with pre-matched components take the guesswork out of specifying water features
- » FastFalls spillways with rear liner attachment eliminate leaks due to settling
- » Pump Vaults accommodate multiple pumps, plumbing sizes and accessories
- » Eco-Blox interlock to create stacked assemblies for easier installation and deeper reservoirs

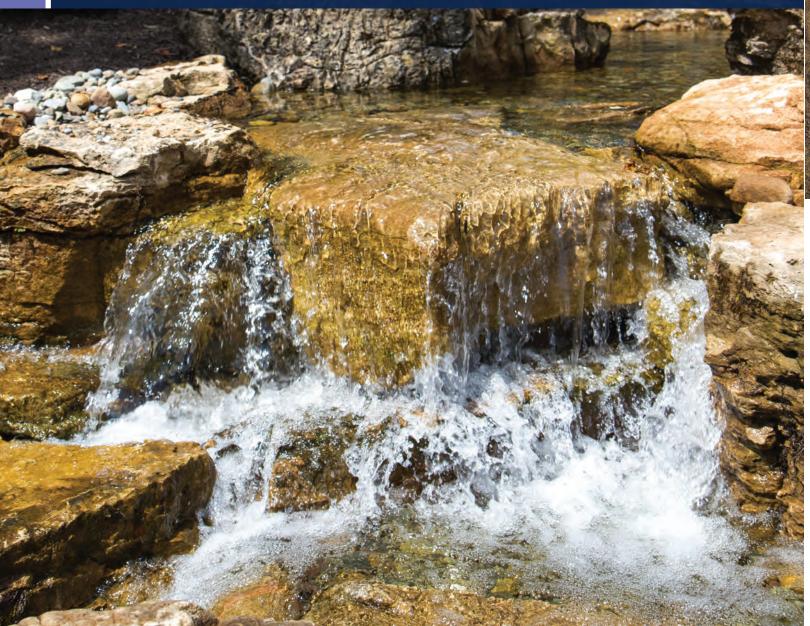



1 FastFalls "inside the liner" design and reinforced spillway lip prevents leaks and retains rock, gravel, soil or mulch to help blend seamlessly with the surrounding landscape.

2 One-piece liner flange and molded inserts ensure a watertight liner attachment every time.

Molded support cones and internal baffles give the FastFalls incredible strength and diffuse the water, ensuring consistent flow across the spillway.


4 Heavy-duty, one-piece Pump Vaults offer all the strength and versatility you need, allow for large flow rates and will not bow, bend or break, even under the most extreme conditions.

Pump Vault Extensions add the height of one Eco-Blox for larger, deeper basins and carry the same strength and durability as Atlantic Pump Vaults.

6 Eco-Blox are modular, load-bearing blocks with over 95% void space to store large volumes of water easily and economically, in two sizes for maximum versatility.

Slide locks allow for quick, tool-free assembly of Eco-Blox that is also more secure and stable than peg-style connections used by the competition.

8 Eco-Blox are extremely strong, able to support 7.5 tons and are AASHTO HS-20 compliant for commercial applications.









- Water matrix blocks installed in lined excavations create weight-bearing underground water storage reservoirs
- Atlantic's Eco-Blox are the strongest available, locking together to support up to seven tons of distributed load
- Small Eco-Blox, approximately half the size of Eco-Blox offer more design options with less excavation time and effort



74234

- Up to 96% void space, Eco-Blox hold more water in a smaller volume than gravel-filled basins, saving labor, time and money
- Arrange modular blocks in any configuration with any number of layers to accommodate almost any design
- Excellent for bog construction, to create settling chambers below natural plantings of active bog filters


ITEM	MODEL DESCRIPTION		DIMENSIONS	CAPACITY	FOR USE WITH	APPLICATIONS	WARRANTY
89662	ECOBLOX-SMALL Eco-Blox Small Water Matrix (Boxed)		27"W x 16"D x 9"H	15½ gallons	PV7500	Pond-free / Fountain	1-year
74234	Eco-Blox Water Matrix (Boxed)		27"L x 16"W x 17½"H	31½ gallons	PV15000	Pond-free / Fountain	1-year
74268	Full Pallet of Eco-Blox (60 - Unboxed)					Pond-free / Fountain	1-year
89664	ECOBLOX8X15	Eco-Blox Panels - 8" x 15" (Pack of 4 - unboxed)	8"L x 15"W x ¾"H			Pond-free / Fountain	1-year
89666	ECOBLOX8X27	Eco-Blox Panels - 8" x 27" (Pack of 4 - unboxed)	8" x 27" x ¾"H			Pond-free / Fountain	1-year
74270	ECOBLOX16X15	Eco-Blox Panels - 16" x 15" (Pack of 4 - unboxed)	16½"L x 15"W x ¾"H			Pond-free / Fountain	1-year
74269	ECOBLOX16X27	Eco-Blox Panels - 16" x 27" (Pack of 4 - unboxed)	27"L x 16"W x ¾"H			Pond-free / Fountain	1-year

DID YOU KNOW?

You can purchase Eco-Blox in bulk or loose panel configurations to further reduce costs.

For Eco-Blox Small you will need 1 pack #89666 ECOBLOX8X27, 2 packs of #89664 ECOBLOX8X15 and 1 pack of #74269 ECOBLOX16X27. This will build 2 Eco-Blox Small water matrix blocks.

For Eco-Blox you will need 1 pack of #74269 ECOBLOX16X27 and 1 pack #74270 ECOBLOX16X15 to create 1 Eco-Blox water matrix block.







92602



74250

- Kits come complete, right down to PVC glue, thread sealant and fittings, to eliminate guesswork and material runs, saving you time and money
- Included Warm White LED lighting in Medium & Large Pond-free Kits extend the enjoyment of the water feature into the evening
- Vaults and Spillways are matched to energy efficient pumps to keep operating costs low
- Properly equipped for optimum streambed length and reservoir capacity to ensure your water feature works as designed
- Includes complete installation kit including fittings, thread sealant and PVC glue

92603

ITEM	74250	92602	92603			
MODEL	PFK1716	PFK1519	PFK1526			
DESCRIPTION	Small Pond-free Kit w/ 16" Spillway	Medium Pond-free Kit w/ 19" Spillway	Large Pond-free Kit w/ 26" Spillway			
LINER SIZE	10' :	x 15'	10' x 20'			
FASTFALLS	SP1600	SP1900	SP2600			
PUMP VAULT	PV1700	PV15	5000			
ECO-BLOX	2	3	5			
PUMP	TT3000	TT4000	TT5000			
FALLSFOAM	LF1100	(2) LF1100				
LIGHTING		(2) WWCS2 Spotlights and W	W30X4 Transformer & Splitter			
CHECK VALVE		TR215CV				
UNDERLAYMENT		12' x 12'				
AUTO FILL		AF1	000			
TUBING	1½" x 25'	2" x	25'			
BASIN SIZE	48" x 30" x 18"	54" x 32" x 18"	54" x 48" x 18"			
STREAMBED SIZE	16" - 24"W x 6'L	19" - 24"W x 6'L	26" - 32"W x 10'L			

ATI ANTIC ATI ANTIC 4



- Pump vaults house and protect the pumps and plumbing of underground water storage and circulation systems
- Atlantic's Pump Vaults occupy the same footprint as Eco-Blox for simplified installation within a rectangular basin
- Vaults are rotomolded of virtually indestructible polyethylene for long, worry-free service
- Extremely strong low profile vault lids fit all sizes, support gravel and foot traffic and can be removed without gravel falling in
- Flat panels accommodate up to 3" plumbing and auto fills
- Either slotted side of Vault handles double the rated flow so one side can be blocked by liner without effecting capacity
- Pump vault extensions increase the height of the vault in deeper, larger basins, with each extension the height of one Eco-Blox
- All Vaults accommodate two or more pumps for versatility
- Remote Pump Vault allows submersible pump location outside of lined reservoir

ITEM	74235	89583	89584	89585	90162
MODEL	PV1700	PV7500	PV15000	PVEXT	PVRI
DESCRIPTION	Pump Vault - 3900 gph	Pump Vault - 7500 gph	Pump Vault - 7500 gph Pump Vault - 15000 gph Pump Vault Extension		Pump Vault - Remote Inline
MAX PUMP FLOW	3,900 gph	7,500 gph	15,000 gph		
OPENING	10"		12¼" >	14¾"	
EXTENSION				17"	
DISCHARGE	1½" & 2" step outlets	1½" & 2"		2" & 3"	
FOR USE WITH	#74234 - ECOBLOX	#89662 - ECOBLOX-SMALL	#74234 - ECOBLOX	#89583 - PV7500 & #89584 - PV15000	Remote Inline Pump Appliations
DIMENSIONS	17"W x 12"D x 22½"H	27"L×16"W×20¾"H	27"L x 16"W x 27"H 27"L x 16"W x 183/s"H		27"L x 16"W x 183%"H
WARRANTY	Lifetime				

ROCK LIDS



74005



- 74005 74006 74007 MODEL RL30D RL30G RL30M Small Rock Lid -Small Rock Lid -Small Rock Lid -DESCRIPTION Desert Great Lakes Mountain **DIMENSIONS** 24"L x 24"W x 5"H MATCH TO PV7500 / PV15000 / PVEXT / PVRI **PUMP VAULT** WARRANTY 1-year
- Rock Lids conceal equipment under natural looking faux stones
- Atlantic's realistic Rock Lids are molded from real stones in three regional colors to complement every application perfectly
- Sturdy fiberglass construction, authentic textures and incredibly real finishes set these Rock Lids apart from plastic covers



PV7500 FEATURES:


- 1. Inset lid keeps gravel from falling into the vault.
- 2. Flat panels with drill points on two sides accommodate up to 3" bulkheads and Auto Fills.
- 3. Vault occupies same footprint as Eco-Blox for compact reservoirs.
- 4. Two recessed pockets accept up to two Eco-Rise Diverters to power up to six features in an Eco-Rise System. Page 27
- Pump pocket extendes below floor of Eco-Blox Small reservoirs to keep pumps submerged.

PV15000 FEATURES:

- 1. Large diameter housing provides better access to pump and plumbing.
- 2. Flat panels with drill points on all four sides accommodate up to 3" bulkheads and Auto Fills.
- 3. Pump pocket extendes below floor of Eco-Blox reservoirs to keep pumps submerged.
- 4. Vault occupies same footprint as Eco-Blox for compact reservoirs.
- 5. Inset lid keeps gravel from falling into the vault.
- 6. Accommodates all 62 Atlantic and OASE pumps



TECH TIP

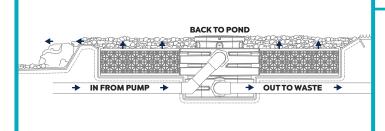

Atlantic's Eco-Blox and Pump Vaults make excellent, easy to maintain bog filters. The Pump Vault functions as both an inlet for incoming water and acts as a cleanout for upflow bogs of any size. Pond water pumped into the Pump Vault passes into the Eco-Blox reservoir, shedding velocity which causes sediment to settle out. Plants set in a thin layer of gravel on top of the Eco-Blox remove fine solids and nitrates. Simply flush the chamber to drain wastes from both Pump Vault and Eco-Blox.

8 ATLANTIC 49











74271 74227 74228

- Spillway boxes diffuse incoming water flow to create the starting point of Pond-free streams and falls
- Atlantic FastFalls are designed to make plumbing the top of the waterfall as easy as possible
- Innovative rear liner attachment simplifies installation and eliminates leakage due to settling
- Crush-proof design with internal baffles stabilized by support cones carries the weight of the largest rock and stone
- Reinforced spillway lip retains rock, gravel, mulch or soil and can be planted to blend seamlessly into the surrounding landscape

74229

 FastFalls includes installation kit, male thread adapter and one-piece liner flange

ITEM	74271	74227	74228	74229		
MODEL	SP1600	SP1900	SP2600	SP3800		
DESCRIPTION	16" FastFalls	19" FastFalls	26" FastFalls	38" FastFalls		
WATERFALL WIDTH	16"	19" 26"		38"		
INLET	11/2" FIPT	2" F	FIPT	3" FIPT		
MAX PUMP FLOW	3,000 gph	4,000 gph	6,000 gph	9,000 gph		
DIMENSIONS	16½"W x 9½"D x 7¼"H	20½"W x 17"D x 10¼"H	27½"W x 17"D x 10¼"H	39½"W x 17"D x 10¼"H		
WARRANTY	Lifetime					

DID YOU KNOW?

Did you know there is a FastFalls hiding in this photo? Although the FastFalls can support the heaviest rock and stone, it was also designed to retain soil, gravel and mulch perfectly. For the most natural looking camouflage possible, plant ground covers or low growing perennials directly into the pockets on top of the FastFalls to blend the FastFalls seamlessly with the surrounding landscape.



SP1600 FEATURES:



- 1. Internal baffle diffuses the water for an even flow across the spillway.
- 2. Raised front radius retains natural camouflage.
- 3. One-piece design eliminates any chance of leaks due to 'over pumping'.
- 4. Pre-installed 1½" Spinweld® fitting simplifies plumbing connection.
- 5. One-piece liner flange and molded inserts ensure a secure liner attachment.

SP1900 / SP2600 / SP3800 FEATURES:

- 1. Molded support cones give the FastFalls incredible strength and help diffuse the water flow.
- 2. Two internal baffles slow down the water's velocity and ensure even water distribution across the spillway.
- 3. Raised front radius holds back any loose gravel, soil or mulch used to camouflage the top of the unit.
- FastFalls are completely sealed except for the spillway opening.
 This design eliminates any chance of leakage due to 'over pumping'.
- 5. Molded gussets support the spillway lip.
- 6. FastFalls come with an installed 2" or 3" FIPT Spinweld® fitting.
- 7. One-piece liner flange and molded inserts ensure a watertight liner attachment every time.



When we say y

DID YOU KNOW?

When we say you don't have to worry about crushing, cracking or breaking your FastFalls, we mean it! Set your large boulders right on top to camouflage these spillways without a second thought – we test them with a 33,000 lb. Caterpillar 928F Wheel Loader. Now, that's strong!

• ATLANTIC



WG WATER GARDEN

Atlantic-Oase offers a complete solution for every pond builder. Full-featured Skimmers and FilterFalls remove floating debris and suspended solids with minimal maintenance. In-pond and pressure filters clear fish waste, taxins and particulates from small to medium ponds. Advanced ScreenMatic² and ProfiClear filters handle the heaviest fish loads and clean themselves. Select custom accessories or choose a Pond Kit that comes with all the equipment, liner and plumbing you'll need to complete any project.

- » Full range of Skimmers, FilterFalls and Filters for every size water garden
- » Crush-proof Skimmers and FilterFalls with lifetime warranties eliminate concerns of warping and deformation in the ground
- » Upflow, gravity flow and pressurized filtration options accommodate any fish stocking levels
- » Kits containing everything needed for a complete installation save you time and money
- » A complete line of accessories to complement and enhance your water garden allows for full customization





1 Skimmers feature Super Flow weir doors, stainless steel hardware and a heavy-duty rotomolded shell for the ultimate in durability backed by a lifetime warranty.

2 Large stainless steel-framed nets and stainless/nylon filter brush panels or Matala matting in Skimmers provide excellent pre-filtration and accept Matala cartridge upgrades.

3 Large pump chambers capable of housing multiple pumps provide the versatility to improve energy efficiency by using two smaller pumps instead of one large one.

Optional installation accessories such as the Triton Ionizer,
Bottom Drain Kit and Auto Fill
Kit allow you to keep your
pond clean while reducing
maintenance at the same time.

5 Atlantic's flexible PVC piping, geotextile underlayment and EPDM liner are all proudly made in the United States to the highest quality standards.

6 Heavy-duty rotomolded polyethylene FilterFalls feature stainless steel hardware, molded inserts and solid lips for watertight liner attachment and lifelong durability.

Sturdy support bars and top grates support the weight of natural rock camouflage and prevent crushing or warping from the surrounding soil.

Oversized interior volumes provide tremendous filtration capacity out of the box, expandable with any combination of Matala Mat Kits, Bio-Balls, Bio-Rocks and Bio-Tech media for custom filtration options.









- All-in-one in-pond filters integrate pump and filtration with a decorative element
- Oase Filtral UVC combines mechanical, biological and Ultraviolet filtration with multiple nozzles and aeration (800 & 1600 only) to keep small ponds clear
- Easy open clips allow quick access to filter foam, ceramic and bio-media that nurture beneficial bacteria, without dismantling the nozzle assembly
- Pivoting telescoping nozzle extends 5", while built-in flow control and diverter valve can run an optional small secondary water feature using the included stepped hose adapter
- Integrated grounding plate protects entire water feature with unparalleled safety while viewing port allows safe visual confirmation of proper UVC operation
- The aeration nozzle greatly increases gas diffusion and circulation (800 & 1600 only)

ITEM	76004	76005	76006			
DESCRIPTION	Filtral UVC 400	Filtral UVC 800	Filtral UVC 1600			
VOLTS		120				
WATTS	20	22	50			
UVC	5W	9W	13W			
MAX HEAD	4	6'				
MAX DEPTH	24" (for nozzle display)	25" (for nozzle display)	26" (for nozzle display)			
CORD LENGTH		15'				
DIMENSIONS	8"L x 9"W x 5"H	10½"L x 9½"W x 5½"H	13½"L x 11"W x 6"H			
HOSE SIZE	½", ¾", 1"					
POND VOLUME	up to 400 gal	up to 400 gal up to 1,600 gal up to 1,600 gal				
WARRANTY		2-year				

	CLEAR WATER GUARANTEE							
FISH LOAD			FUTED	Inc	DUMB			
LIGHT	MEDIUM	HEAVY	FILTER	UVC	PUMP			
<400 gal	<200 gal	-	Filtral UVC 400	5W (included)	195 gph included			
<800 gal	<400 gal	-	Filtral UVC 800	9W (included)	235 gph included			
<1,600 gal	<800 gal	-	Filtral UVC 1600	13W (included)	410 gph included			

	NOZZLE PATTERNS					
ITEM	MAX FLOW (GPH)	LAVA	VULKAN	MAGMA		
76004	195	8"W	24"W x 26"H	14"W x 14"H		
76005	235	16"W	35"W x 43"H	39"W x 43"H		
76006	410	16"W	40"W x 40"H	40"W x 40"H		







40348

- In-line pressure filters offer biological and mechanical filtration that can be located remotely
- Oase BioPress filters combine mechanical and biological filtration with ultraviolet light to keep water features clear
- Monitor UVC, filter performance and pollutant level, even clean foams with cleaning handle without removing cover, simplifying maintenance
- Bury canister to the quick release clamps for easy concealment
- Moving bed bio-media offers additional surface area for beneficial bacteria (1600 and 2400 only)

45452

ITEM	45451	40348	45452		
DESCRIPTION	BioPress 1000	BioPress 1600	BioPress 2400		
UVC	7W 9W				
MAX FLOW	1,050 gph	2,000 gph	2,120 gph		
MAX PRESSURE	2.9 psi / 7¹ of head				
MAX PUMP INPUT PRESSURE	7.25 psi / 17' of head (Max pump shut off 17')				
CORD LENGTH		10'			
DIMENSIONS	9"W x 13¼"H	14"W x 17¾"H	14"W x 22½"H		
HOSE SIZE		3/4" - 11/2"			
POND VOLUME	up to 1,000 gal up to 1,600 gal up to 2,400 gal				
INCLUDES	2 types of filter foams, bio-media (1600 & 2400), UVC, metric step fittings				
WARRANTY		2-year			

	CLEAR WATER GUARANTEE							
	FISH LOAD		FISH LOAD		FILTER	UVC	PUMP	
LIGHT	MEDIUM	HEAVY	TIELEK	010	POMI			
<1,000 gal	<500 gal	<250 gal	BioPress 1000	7W (included)	AquaMax Eco Classic 1200			
<1,600 gal	<800 gal	<400 gal	BioPress 1600	9W (included)	AquaMax Eco Classic 1900 AquaMax Eco Premium 2500			
<2,400 gal	<1,200 gal	<600 gal	BioPress 2400	9W (included)	AquaMax Eco Classic 2700 AquaMax Eco Premium 3500			

54 OASE





- In-line pressure filters offer biological and mechanical filtration that can be located remotely
- Oase 3rd generation FiltoClear provides mechanical and biological filtration with ultraviolet clarification (UVC)
- Compact, high-capacity filter is perfect for Fountain, Formal Spillway, Pond-free and Water Garden applications
- The high quality, impact resistant body can be buried to the clamping ring
- 3 densities of replaceable filter foams, new plates and extra supports improve cleaning function and ensure long service life

- Patented UVC Cleaning Rotor keeps quartz glass clean for better transmission of UV light (FiltoClear 5200 & 8200 only)
- 2-way valve backflushes filter and directs waste with Easy-Clean Technology, no need to open filter or remove the cover
- Monitor UVC, filter performance and pollutant level and change UV lamp all without opening filter
- Newly developed bypass technology ensures constant water flow and prevents the filter from becoming clogged.

ITEM	91669	91670	91671		
DESCRIPTION	FiltoClear 3400	FiltoClear 5200	FiltoClear 8200		
uvc	24W	42W	60W		
MAX FLOW	2,400 gph	3,450 gph	4,500 gph		
MAX PRESSURE	2.9 psi / 7' of head				
MAX PUMP INPUT PRESSURE	7.25 psi / 17' of head (Max pump shut off 17')				
CORD LENGTH	16'				
DIMENSIONS	15"W x 19¼"H	15"W x 24"H	15"W x 28¾"H		
HOSE SIZE		1½", 2"			
POND VOLUME	up to 3,400 gal up to 5,200 gal up to 8,200 gal				
INCLUDES	3 types of filter foams, UVC, metric step fittings, 1½" / 2" Sch40 adapter				
WARRANTY		2-year			

FILTOCLEAR FEATURES:



- 1. Metric step barbs and $1\!\%$ / 2 " Sch 40 adapter fittings for both $1\!\%$ " and 2" flexible and rigid PVC
- 2. Canister can be buried up to metal clamping ring with simple lever and safety lock
- 3. Sleek high powered ballast housing with high visibility power indicator
- 4. 2-way, quarter turn valve simplifies cleaning and backwash
- 5. High power UVC bulb is replaceable without turning off pump or removing quartz glass sleeve
- 6. Handle, foam plate and sponge supports work together for faster, more effective cleaning
- 7. Three foam densities, 10, 20 & 30 pores per inch (ppi), support removal of ammonium, nitrites and nitrates
- 8. Cleaning Rotor spins to minimize debris build up on UVC quartz sleeve (5200 & 8200 only)

	CLEAR WATER GUARANTEE								
	FISH LOAD		FILTER	UVC	PUMP				
LIGHT	MEDIUM	HEAVY			FUMF				
<3400 gal	<1700 gal	<850 gal	FiltoClear 3400	24W (included)	AquaMax Eco Classic 1900 AquaMax Eco Premium 2500				
<5200 gal	<2600 gal	<1300 gal	FiltoClear 5200	42W (included)	AquaMax Eco Classic 2700 AquaMax Eco Premium 3500				
<8200 gal	<4100 gal	<2050 gal	FiltoClear 8200	60W (included)	AquaMax Eco Classic 3600 AquaMax Eco Premium 4500				



DID YOU KNOW?

Oase pressure filters can be used with multiple Atlantic Systems! Add extra filtration to your Formal Spillway Hardscape Basin or your Pond-free waterfall. Just add a tee and ball valve to divert partial water flow to the FiltoClear and add a return line to your water feature.











74038





74041

- Skimmers house and protect your pumps and plumbing while clearing surface debris from the pond
- Atlantic's Pond Skimmers offer more size and filtration options and greater strength and versatility
- All Skimmers excluding PS3000 accept two pumps for increased flow, lower operating costs and multiple spillway options
- Multiple filtration options including net, mats and brushes let you customize to fit every water garden
- Reinforced structures eliminate warping, deformation and callbacks
- Faceplate hardware is black anodized stainless steel for maximum concealment and longevity
- Multiple plumbing, check valve and ionizer options make these Skimmers the most versatile on the market
- PS3000 Satellite Skimmer plumbs to a larger Skimmer (PS7000/ PS15000) to draw water from hard to reach areas, plumb directly to an AquaMax Eco Premium Pump, installed inside the liner

ITEM	74038	74039	74040	74041	74037
MODEL	PS3000 PS3900 PS4600		PS4600	PS7000	PS15000
DESCRIPTION	Satellite Skimmer	Skimmer - 6" weir	Skimmer - 6" weir	Skimmer - 9" weir	Skimmer - 15" weir
WEIR WIDTH		6"		9"	14"
INTERNAL WATER DEPTH	AL WATER DEPTH 21' 14½" 15½" 17½"		17½"	24½"	
DIMENSIONS	13"W x 13"D x 25"H		28"W x 33"D x 31"H		
MAX PUMP FLOW	3,000 gph	3,900 gph	4,000 gph	7,000 gph	15,000 gph
SQ. FT. RATING	200	200	400	900	1400
FILTERING	Net	Net, Matala Mat	tala Mat Net, Brush Panel		
MATCH TO	PS7000 / PS15000	BF1600	BF1900 BF2600 BF3		BF3800
WARRANTY	Lifetime (enclosure)				



PS3900 FEATURES:

- 1. Sturdy removable lid supports natural rock camouflage and foot traffic.
- 2. Support bar for added strength.
- 3. Stainless steel-framed trap net and Matala filter mat provide mechanical filtration.
- 4. Designed to enhance structural rigidity.
- 5. Rolled upper rim provides clean lines and incredible strength.
- 6. Cut-off step outlets for $1\frac{1}{2}$ " and 2" pipe provided on both sides of the skimmer.
- 7. Super Flow weir door to maximize skimming efficiency.
- 8. Labeled drill points for the installation of Auto Fill and overflow. (not shown)

PS4600/PS7000/PS15000 FEATURES:

- 1. Sturdy removable top lid supports natural rock camouflage and foot traffic.
- 2. Heavy-duty brush panel provides maximum surface area for mechanical filtration.
- 3. Heavy-duty stainless steel framed trap net for catching large debris.
- 4. Rolled upper rim provides clean lines and great strength.
- 5. Super Flow weir door to maximize skimming efficiency.
- 6. Ribbed design enhances structural rigidity and strength.



ROCK LIDS





74006 Great Lakes

74007 Mountain



74009 Desert 74010 Great Lakes 74011 Mountain (shown)



74013 Desert 74014 Great Lakes (shown) 74015 Mountain

- Rock Lids cover Skimmers completely to attractively conceal them in the water garden

• Three sizes and three regional colors ensure the perfect fit for every application (color may vary on actual product)

• Rock Lids can also be used to hide and protect Pump Vaults, • Molded from real stones, the sturdy fiberglass construction, authentic textures and incredibly real finishes set these Rock Lids apart FilterFalls and other equipment

ITEM	74005	74006	74007	74009	74010	74011	74013	74014	74015
MODEL	RL30D	RL30G	RL30M	RL40D	RL40G	RL40M	RL70D	RL70G	RL70M
DESCRIPTION	Small Rock Lid			Medium Rock Lid			Large Rock Lid		
COLOR	Desert	Great Lakes	Mountain	Desert	Great Lakes	Mountain	Desert	Great Lakes	Mountain
DIMENSIONS	24"L x 24"W x 5"H			34"L x 24"W x 5"H			40"L x 36"W x 10"H		
MATCH TO SKIMMER	PS3900			PS4600 P			S7000 / PS1500	0	
WARRANTY	1-year								



SWIMSKIM



ITEM	50040		
DESCRIPTION	SwimSkim		
WATTS	40		
MAX FLOW	580 GPH		
CORD LENGTH	15'		
DIMENSIONS	13"L x 12"W x 10"H		
SQ. FT. RATING	270		
INCLUDES	2 high-density filter foams, integrated pump, and debris basket		
WARRANTY	1-year		


- In-pond skimmers remove surface debris before it can settle to the bottom of the pond
- Oase SwimSkim with integrated pump floats on the surface, drawing debris into removable basket using patented flap technology that increases surface tension
- Easy to use right out of the box, plug in and add to your pond
- Integrated aerator oxygenates your pond while skimming
- Versatile skimmer adapts to any pond or water feature at least 12" deep and skims up to 270 square feet



DID YOU KNOW?


SwimSkim, AquaSkim and ProfiSkim baskets can be easily reached for emptying up to eight feet away with the versatile telescoping Oase EasyPick premium pond pliers, page 143







- Telescopic design accommodates reservoir depths from 19" to 36" without modification, and as little as 11" by trimming support tube



• Easy to clean debris basket can be retrieved without entering pond

• Add stones to wide base to stabilize the unit

 Ideal for use with the adjustable secondary inlet of AquaMax Eco Premium pumps (see chart below)





AQUAMAX PREMIUM	AQUAMAX PREMIUM SECONDARY INLET SETTING					
PUMP MODEL	0	1	2	3	4	
2000	_	-	-	•	•	
3000	_	-			•	
4000	-		•		•	



- Skimmers pull debris off the surface of the pond before it can sink to the bottom
- Oase AquaSkim Gravity is designed to mount on the wall of recreational ponds
- AquaSkim Gravity connects directly to gravity-fed system intake
- Keeps up to 430 sq. ft. of water surface clear of debris
- Large, easy to clean basket with 48 oz. capacity and grip loop
- Maximum water level variation of 4¾"



ITEM	57395	89198
DESCRIPTION	AquaSkim40	AquaSkim Gravity
OUTLET	1" - 1½"	4" (DN 110)
MIN FLOW	1,600 gph	2,110 gph
MAX FLOW	4,200 gph	5,285 gph gravity-fed
DIMENSIONS	14"W x 32"H	30¾"L x 23"W x 13¾"H
BASKET VOLUME	38 oz.	48 oz.
INCLUDES	Sch40 adapter & metric kink-free hose adapter	DN 110 adapter (Sch35 4")
WARRANTY	2-year	5-year

• ATI ANTIC





ITEM	89197		
DESCRIPTION	ProfiSkim 100		
OUTLET	DN 110 - requires 4" rubber coupling (not included)		
MIN FLOW	2,650 gph		
MAX FLOW	3,170 gph gravity-fed / 5,300 gph pump-fed		
DIMENSIONS	30¾"L x 23"W x 13¾"H		
BASKET VOLUME	73 in³ / 3 gal		
INCLUDES	2" x 4" (DN 110) adapter		
WARRANTY	5-year		

- Skimmers pull debris off the surface of the pond before it can
- Oase ProfiSkim low profile body is ideal for shallow water or regeneration zones from 14" to 21" in depth
- Can clean up to 860 sq. ft. of surface area

- Included adapter allows for use with pump-fed and gravity-fed systems
- Large, easy-to-clean stainless steel basket with 8mm mesh





- Flow through bio-mechanical filters clean and clear pond water which returns to the pond by gravity
- Oase BioSmart filters strip water of debris, ammonia and nitrites with three levels of foam filtration housing beneficial bacteria
- Cleaning indicator alerts when to pull up on the cleaning handles to squeeze debris from the foams, no need to remove or manually clean them
- Attach a hose to the Gardena-style fitting and open the sludge valve to finish cleaning and rinsing filter quickly and easily



56930

- With built-in thermometer, Venturi inlets for optional aeration and pre-drilled UVC attachment inlets to optimize water quality
- Add an optional Vitronic UVC to qualify for the Clear Water Guarantee

ITEM	56929	56930		
DESCRIPTION	BioSmart 5000	BioSmart 10000		
OUTLET	2½" / 3" (adapter)			
MAX FLOW	1,450 gph	2,110 gph		
DRAIN SIZE	2"			
DIMENSIONS	22"L x 22"W x 16"H	30"L x 22"W x 16"H		
HOSE SIZE	3¼", 1", 1¼", 1½"			
POND VOLUME	up to 5,000 gal	up to 10,000 gal		
INCLUDES	Filter foams, 3" Sch40 outlet adapter, metric step fittings (¾", 1¼", 1½")			
WARRANTY	3-year			

	CLEAR WATER GUARANTEE						
FISH LOAD							
LIGHT	MEDIUM	HEAVY	FILTER	UVC	PUMP		
<5,000 gal	<2,500 gal	<1,250 gal	BioSmart 5000	Vitronic 18	AquaMax Eco Classic 1900 AquaMax Eco Premium 2500		
<10,000 gal	<5,000 gal	<2,500 gal	BioSmart 10000	Vitronic 36	AquaMax Eco Classic 2700 AquaMax Eco Premium 3500		

DID YOU KNOW?

The ProfiSkim 100 is the perfect choice for the recreational pond because of its huge volume and low profile. Regeneration zones planted with aquatic plants are typically 18" deep or less and generate a surprising amount of floating surface debris, like leaves or flowers. The ProfiSkim effectively clears these areas before debris can sink and its huge 3 gallon capacity allows more time between cleanings without compromising flow.







- Flow through filters with biological and mechanical filtration clean and clear pond water which flows back down to the pond
- Oase BioTec ScreenMatic² automatically separates debris using the self-cleaning screen, depositing coarse debris into the removable tray
- Adjustable intelligent cleaning sensor mounted above screen detects buildup of debris and automatically empties screen into
- High efficiency filter system features 3 different densities of foam harboring a variety of beneficial bacteria that remove harmful ammonia and nitrites
- Double-sealed screen motor and reinforced screen material ensure an extended service life

- Foam distribution and optimized water level in the container to provide longer filter service life, improved filtration and
- Filter foams clean directly inside the filter in pond water to preserve beneficial bacteria colonies and reduce water waste
- Slide valve on sludge drain removes sludge and dirty water with
- Add an optional Bitron C UVC clarifier to any ScreenMatic 2 filter system for enhanced clarity and cleaner water, page 77

ITEM	42975	44120	93036				
DESCRIPTION	BioTec ScreenMatic² 18000	BioTec ScreenMatic² 24000	BioTec ScreenMatic ² 39000				
VOLTS		120					
WATTS		5					
OUTLET	3" adapter	DN 110 - requires 4" rubbo	er coupling (not included)				
MIN FLOW	1,585 gph 2,110 gph						
MAX FLOW	2,900 gph	3,300 gph	4,620 gph				
CORD LENGTH		6' + 16'					
DIMENSIONS	31"L x 23"W x 21½"H	31"L x 23"W x 25½"H	52½"L x 25"W x 33"H				
HOSE SIZE	1", 114", 112" 1", 114", 112", 2"						
POND VOLUME	up to 18,000 gal	up to 24,000 gal	up to 39,000 gal				
INCLUDES	2 blue filter foams, 3 purple filter foams, 3 red filter foams, 3 phossless filters	4 blue filter foams, 6 purple filter foams, 6 red filter foams, 4 phossless filters	4 blue filter foams, 7 purple filter foams, 7 red filter foams, 12 phossless filters				
WARRANTY	2-year + 1						

BIOTEC SCREENMATIC² FEATURES:



- Intelligent cleaning sensor senses debris and activates cleaning screen
- 2. Manual belt run button for manual operation of cleaning screen
- 3. LED indicates status of cleaning bar and screen
- 4. Rubberized separator lip scrapes debris off screen and
- 5. Removable sludge tray for easy maintenance
- 6. Built-in overflow holes keeps filter operational even when sludge tray is full
- 7. Sludge drain with integrated slide valve removes sludge and dirty water from system
- 8. Optimized water distributor evenly disperses water flow
- 9. Three densities of foam harbor beneficial bacteria to remove ammonia and nitrite, while Phosless cartridges remove algae-stimulating phosphorus
- 10. Storm-safe fastening clips lock down filter lids (BioTecScreenMatic² 18000 and 24000 only)

CLEAR WATER GUARANTEE						
FISH LOAD			FILTER	uvc	PUMP	
LIGHT	MEDIUM	HEAVY		0.0		
<18,000 gal	<9,000 gal	<4,500 gal	BioTec ScreenMatic² 18000	Bitron C 55	AquaMax Eco Classic 3600 AquaMax Eco Premium 4500 AquaMax Eco Premium 3000 12V	
<24,000 gal	<12,000 gal	<6,000 gal	BioTec ScreenMatic² 24000	Bitron C 55 / Bitron C 110	AquaMax Eco Classic 3600 AquaMax Eco Premium 4500 AquaMax Eco Premium 3000 12V	
<39,000 gal	<19,500 gal	<9,750 gal	BioTec ScreenMatic ² 39000	Bitron C 110	AquaMax Eco Premium 4500 / 5500 AquaMax Eco Expert 6800* AquaMax Eco Expert 5300 12V AquaMax Eco Expert 7100 12V*	

^{*}Must adjust flow down to max flow of filter



DID YOU KNOW?

Although flow through filtration has to be above water level, they are easier to hide than you might think. BioTec ScreenMatic² can be remotely located in sheds, behind walls, plantings or decorative screens wherever an electric source is easily accessible.


PROFICLEAR GUIDE

HOW PROFICLEARS WORK



- 1. Self-cleaning Rotating Drum prefilters in incoming pondwater through 60-micron screens, rinsing and flushing debris with a high-pressure pump via sensor, timer or manually
- 2. UltraViolet Clarifier (UVC) safely and efficiently cleans and clears water of algae and bacteria with powerful ultraviolet light
- 3. Moving Bed Modules fitted with supplemental aeration circulate buoyant biomedia, promoting optimal growth of beneficial bacterial colonies that remove toxins.
- 4. Standing Bed Modules further polish water through banks of easily flushed foam filtration (XL Systems Only)
- 5. Discharge Modules, required with Gravity-fed systems, house UVCs and submersible pumps or mount in-line pumps

PUMP-FED VS. GRAVITY-FED

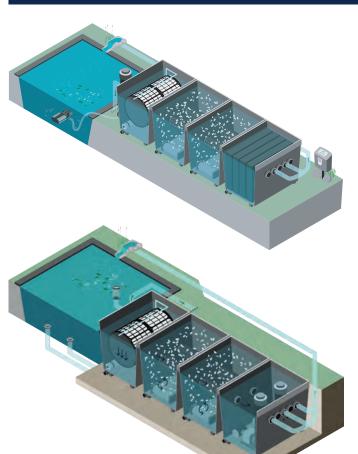

PUMP-FED

- System is located above grade and above water level
- Water is pumped into the system, typically by a pump on the
- Water passes through the modules and returns to the pond
- Can be located remotely but the return must be pitched down

GRAVITY-FED

- Water enters the system via gravity, to replace water being
- plumbed to the last module

COMPACT VS. XL SYSTEMS





COMPACT PUMP-FED

- Standalone filter
- · Combines mechanical filtration of rotating drum and biological moving bed filtration in one unit
- UltraViolet Clarifier treats pumped-in water before it enters the filter

COMPACT GRAVITY-FED

- · Modular filter
- · Combines mechanical filtration of rotating drum and biologial moving bed filtration in one unit
- An optional Moving Bed Module can be added for additional biological filtration
- Required Individual Module houses submersible pump or mount in-line pump to return water
- UltraViolet Clarifier treats water last and is located inside or outside the Individual Module after the pump

XL PUMP-FED

- Multi-Module System
- UltraViolet Clarifier treats pumped-in water first, before it enters Drum Filter Module for mechanical filtration
- Moving Bed Module(s) treat water mechanically prefiltered by Drum Filter Module
- Optional Standing Bed Module may be added for additional biological filtration
- Discharge module with Standing Bed media is required to return water



- Multi-Module System
- Moving Bed Module(s) treat water mechanically prefiltered by Drum Filter Module
- UltraViolet Clarifier treats water last and is located inside the Discharge Module after the pump(s)
- Required Discharge Module houses submersible pump(s) plumbed to UVC(s) to return water

- System is located below grade and shares the water level of
- · Water is pumped back into the pond by a pump either in or
- · Can only be located as far as friction-limited gravity flow




















- Oase ProfiClear Premium is a fully automatic pump-fed, flow-through self-cleaning drum filter that polishes water
- Moving Bed System with Hel-X Bio-media processes a minimum of 10 oz. of food waste per day and can be upgraded
- Micro control system offers a choice of manual cleaning, time interval cleaning or full automatic cleaning via sensor





- Digital temperature display provides accurate water temperatures for seasonal maintenance
- Connections for Bitron C UVC and AquaOxy 450 to enhance filtration and aeration (sold separately, page 77 & 138)
- Fully control your ProfiClear Compact with the Oase Control App from anywhere in the world (sold separately)

ITEM	72374	73379			
DESCRIPTION	ProfiClear Premium Compact-M Pump-fed	ProfiClear Premium Compact-L Pump-fed			
VOLTS	120				
WATTS	5 / 870 (cleaning)	5 / 1150 (cleaning)			
INLET	2" & Bitron Dual Inlets				
OUTLET	DN 110 - requires 4" rubber coupling (not included)	(2) DN 110 - requires 4" rubber coupling (not included)			
WASTE DISCHARGE OUTLET	4"				
MIN FLOW	2,000 gph	2,640 gph			
MAX FLOW	4,000 gph	5,280 gph			
COARSE DEBRIS EXTRACTION	80 microns	60 microns			
RINSE PUMP	58 psi	87 psi			
CORD LENGTH	16	' + 3'			
DIMENSIONS	35"L x 27"W x 32"H	53"L x 35½"W x 32½"H			
POND VOLUME	up to 21,000 gal	up to 31,500 gal			
INCLUDES	40 liters Hel-X Bio-media 60 liters Hel-X Bio-media				
WARRANTY	2-year + 1				

PROFICLEAR PREMIUM COMPACT PUMP-FED FEATURES:



- 1. Dual inlets accomodate optional Bitron C UVC Clarifier
- 2. Secondary inlet accomodates 2" pipe for non-UVC equipped installations
- 3. Microcontroller with digital thermometer automates cleaning functions and can be connected to an EGC system
- 4. Made from German engineered GFK Duroplast for enhanced structural integrity
- 5. Drain with integrated slide valve clears sludge as needed
- 6. Drum filter with removable micro sieve that can be upgraded to finer 60 micron screen and manually cleaned if needed
- 7. Spray bar removes fine particles from micro sieve
- 8. Hel-X floating bed Bio-media may be supplemented with 20 additional liters of Hel-X Bio-media
- 9. Discharge returns clean water to pond
- 10. Dirty water discharge 4" outlet

OASE CONTROL



 ${\tt Connect\ your\ ProfiClear\ Premium\ to\ the\ Oase\ Control\ System\ to\ fully\ control\ the\ filter}$ from anywhere in the world on any Android or Apple Device with Oase Control mobile application. See page 130 for more information on the Garden Cloud Controller.

The Oase Control App can display and control a variety of functions including:

- Operational status
- Filtration cycles
- Water Temperature Cleaning time
- Interval time Manual cleaning
- Overall performance data
- · Comparison charts with data collected over time





	CLEAR WATER GUARANTEE						
	FISH LOAD		FILTER	100	DUMB		
LIGHT	MEDIUM	HEAVY	FILIER	UVC	PUMP		
<21,000 gal	<10,500 gal	<5,250 gal	ProfiClear Premium Compact-M Pump-fed	Bitron C 110	AquaMax Eco Classic 3600 AquaMax Eco Premium 3000 12V AquaMax Eco Premium 4500 AquaMax Eco Expert 6800* AquaMax Eco Expert 5300 12V		
<31,500 gal	<15,750 gal	<7,875 gal	ProfiClear Premium Compact-L Pump-fed	Bitron C 110	AquaMax Eco Premium 3000 12V AquaMax Eco Premium 4500 / 5500 AquaMax Eco Expert 6800* AquaMax Eco Expert 5300 12V AquaMax Eco Expert 7100 12V*		
	10,730 gai 1,573 g			Bitron Premium 60 W	AquaMax Eco Premium 4500 AquaMax Eco Premium 5500 AquaMax Eco Premium 3000 12V		

^{*}Must adjust flow down to max flow of filter











9010

- Gravity-fed filters install below pond level, taking in dirty water as clean, filtered water is pumped back to the pond
- Oase ProfiClear Premium is a fully automatic gravity-fed, flow-through, self-cleaning drum filter that polishes water
- The Drum Filter Module automatically separates and flushes solids down to 60 microns out of pond water
- Moving Bed System with 50 liters of Hel-X Bio-media provides optimal biological filtration of up to 12/14 oz. of food waste per day
- Adaptable system accommodates up to 75 L per module to metabolize 18 oz. of waste per day
- Micro control system offers a choice of manual cleaning, time interval cleaning or full automatic cleaning via sensor
- Aligned plumbing connections simplify adding Individual Modules and Moving Bed Modules to increase filtration capacity
- Moving Bed Modules attach in series after the Drum Module for additional biological filtration to meet any design requirement

- Individual Modules house the pump at the discharge end of gravity-fed systems and provide space for additional filtration
- The two baskets in Individual Modules may be filled with up to 8 liters/488 cubic inches of Hel-X filter media for additional filtration
- Innovative Hel-X bio-media provides tremendous protected surface area $245 \text{ ft}^2/\text{ft}^3$ for colonizing beneficial bacteria
- Hel-X media can be switched out for PondPads if additional waste removal is needed, page 185
- Integrated slide valve on the bottom allows filter to be easily drained for cleaning or winterization
- Connect pre-installed aerator to AquaOxy 450 to enhance biological filtration and keep biofilm debris-free (sold separately)
- Fully control your ProfiClear Compact with the Oase Cloud Controller and Oase Control App from anywhere in the world (sold separately)

CLEAR WATER GUARANTEE					
FISH LOAD			FILTER	uvc	PUMP
LIGHT	MEDIUM	HEAVY	FILIER	OVC	FOMIF
<31,500 gal	<15,750 gal	<7,875 gal	ProfiClear Premium Compact-L	Bitron C 110	AquaMax Eco Premium 3000 12V AquaMax Eco Premium 4500 / 5500 AquaMax Eco Expert 6800 AquaMax Eco Expert 5300 12V AquaMax Eco Expert 7100 12V*
13,730 gal	- 17,073 gai	Gravity-fed	Bitron Premium 60 W	AquaMax Eco Premium 4500 / 5500 AquaMax Eco Premium 3000 12V	
		Bitron Premium 180 W	AquaMax Eco Premium 4500 / 5500 AquaMax Eco Premium 3000 12V		

*Must adjust flow down to max flow of filter

PROFICLEAR PREMIUM COMPACT GRAVITY-FED FEATURES:



- 1. Dual outlets align with Moving Bed and Individual Modules
- 2. Three inlets allow for multiple intake locations throughout pond
- 3. Microcontroller with digital thermometer automates cleaning functions and can be connected to an EGC system
- 4. Made from German engineered GFK Duroplast for enhanced structural integrity
- 5. Drain with integrated slide valve clears sludge as needed
- 6. Drum filter with removable 60 micron screen
- 7. Spray bar removes fine particles from micro sieve
- 8. Hel-X floating bed Bio-media may be supplemented with 20 additional liters of Hel-X to process up to 19 oz. of daily waste
- 9. Dirty water discharge 4" outlet

OASE CONTROL



Connect your ProfiClear Premium to the Oase Control System to fully control the filter from anywhere in the world on any Android or Apple Device with Oase Control mobile application. See page 130 for more information on the Garden Cloud Controller.

The Oase Control App can display and control a variety of functions including:

- Operational status
- Filtration cycles
- Water Temperature
- Cleaning time
- Interval time
- Manual cleaning
- Overall performance dataComparison charts with data collected over time





ITEM	89194	89196	89195	
DESCRIPTION	ProfiClear Premium Compact-L Gravity-fed	ProfiClear Premium Moving Bed Module	ProfiClear Premium Individual Module	
VOLTS	120	-		
WATTS	5 / 1150 (cleaning)	_		
INLET	(3) DN 110 - requires 4" rubber coupling (not included)	(2) 180mm (2) 180mm		
OUTLET	DN 110 - requires 4" rubber coupling (not included)	(2) DN 150 (2) DN 110 - requires 4" rubber coupling & (2) 2"		
WASTE DISCHARGE OUTLET	4"	DN 75 DN 75		
MIN FLOW		2,640 gph		
MAX FLOW	6,600 gph	8,700 gph		
COARSE DEBRIS EXTRACTION	60 microns			
RINSE PUMP	87 psi	-		
CORD LENGTH	16' + 16'	-		
DIMENSIONS	53"L x 35½"W x 32½"H	32¾"L x 26¾	4"W x 32¼"H	
POND VOLUME	up to 37,000 gal	-		
REQUIRES	#89195 - Individual Module			
INCLUDES	60 liters Hel-X Bio-media	50 liters Hel-X Bio-media		
WARRANTY	2-year + 1	2-year + 1 2-year + 1		

OASE PRO OASE PRO







95198

87166

73369

- Drum filters utilize a rotating screen to remove debris and moving bed filtration to strip ammonia and nitrites from the water
- Oase ProfiClear Premium XL filter systems are fully automatic, flow-through, self-cleaning modular filters that polish the water of koi and swim ponds
- Pump-fed filters install above water level, taking dirty water from a pump in the bottom of the pond and returning filtered water by gravity back into pond
- ProfiClear Premium XL Pump-fed filters mechanically screen, biologically filter and highly aerate pond water throughout modules
- The Drum Filter Module sieves and separates solids in incoming pond water down to 60 microns, automatically cleaning itself with a high pressure pump, via sensor or time interval, or manually
- Moving Bed Modules feature enlarged moving beds with 60 liters of PondPads that can digest up to 45.5 ounces of fish waste a day
- Pre-installed aerator connects to AquaOxy 450 air pump to enhance biological filtration and keep biofilm debris-free (sold separately, page 138)

- Innovative bypass technology built into Moving Bed Modules optimize movement of Oase PondPads media even at high flow rates.
- Standing Bed Module features curved, dense ClearWave blocks to create the largest possible surface area for ideal colonization of beneficial bacteria
- Beneficial bacteria growing on highly aerated biomedia remove toxins such as ammonium/ammonia, nitrites and nitrates
- Pump-fed Discharge Module features ClearWave standing bed media for biological filtration for crystal clear water
- The five 4"/DN 110 outlets of the Discharge Module ensure maximum flexibility in plumbing connections
- Bitron Premium 60 & 180 UltraViolet Clarifiers easily integrate to the intakes of the Drum Filter Module
- All Modules are easily drained and flushed for cleaning and maintenance via integrated sludge drains
- XL Systems can be operated and monitored remotely via Oase Control app with the Oase Control System (Garden Cloud Controller sold separately, page 130)

PROFICLEAR PREMIUM XL PUMP-FED FEATURES:



- Microcontroller with digital thermometer automates cleaning functions and can be connected to an Oase Control (OC) system
- 2. Five inlets allow for multiple intake locations throughout pond and DN110 connections to Bitron Premium UVCs
- 3. Dirty water discharge 4" outlet
- 4. Removable 60 micron screens (included; multiple screen sizes available) provide easy access to the inside of the drum
- 5. High pressure spray bar removes fine particles from screens

- 6. Drain with integrated slide valve clears sludge for easy cleaning
- 7. Dual 180mm inter-module connectors ensure failsafe connections of Drum, Moving Bed, Standing Bed and Discharge Modules
- 8. Made from German engineered GFK Duroplast for enhanced structural integrity
- Add additional Moving Bed and Standing Bed Modules for extra biological filtration
- Discharge module polishes water with Standing Bed filter and exits through five DN 110 outlets (require 4" rubber couplings)

ITEM	95198	73367	87166	73369	
DESCRIPTION	ProfiClear Premium XL Pump-fed	ProfiClear Premium XL Moving Bed Module	ProfiClear Premium XL Standing Bed Module	ProfiClear Premium XL Pump-fed Discharge Module	
VOLTS	120				
WATTS	5 / 1600 (cleaning)				
INLET	(3) 2" / (2) DN 110	(2) 180mm	(2) 180mm	(2) 180mm	
OUTLET	(2) 180mm	(2) 180mm	(2) 180mm	(5) DN 110 - require 4" rubber coupling	
WASTE DISCHARGE OUTLET	4" (DN 110)				
MIN FLOW		6,600 gph			
MAX FLOW		13,200) gph		
COARSE DEBRIS EXTRACTION	60 microns				
RINSE PUMP	101 psi				
CORD LENGTH	16' + 16'				
DIMENSIONS	51"L x 34½"W x 32½"H		52½"L x 34½"W x 32¼"H		
POND VOLUME	up to 79,000 gal				
REQUIRES	#73367 Moving Bed Module or #87166 Standing Bed Module and #73369 Discharge Module	AquaOxy 450			
INCLUDES		60 liters PondPads			
WARRANTY	2-year + 1				

CLEAR WATER GUARANTEE						
FISH LOAD			FUTED	111/2	DUMP	
LIGHT	MEDIUM	HEAVY	FILTER	UVC	PUMP	
<79,000 gal	<39,500 gal	<19,750 gal	ProfiClear Premium XL Pump-fed	Bitron Premium 60 Bitron Premium 180	AquaMax Eco Expert 6800 AquaMax Eco Expert 11500 AquaMax Eco Expert 7100 12V	

OASE PRO OASE PRO









87166

95197

- Drum filters utilize a rotating screen to remove debris and moving bed filtration to strip ammonia and nitrites from the water
- Oase ProfiClear Premium XL filter systems are fully automatic, flow-through, self-cleaning modular filters that polish the water of koi and swim ponds
- Gravity-fed filters install below pond level, taking in dirty water at one end as clean, filtered water is pumped back to the pond from a pump housed in the discharge side
- ProfiClear Premium XL Gravity-fed filters mechanically screen, biologically filter and highly aerate pond water throughout modules
- The Drum Filter Module sieves and separates solids in incoming pond water down to 60 microns, automatically cleaning itself with a high pressure pump, via sensor or time interval, or manually
- Moving Bed Modules feature enlarged moving beds with 60 liters of PondPads that can digest up to 45.5 ounces of fish waste a day
- Pre-installed aerator connects to AquaOxy 450 air pump to enhance biological filtration and keep biofilm debris-free (sold separately, page 138)



73368

- Innovative bypass technology built into Moving Bed Modules optimize movement of Oase PondPads media even at high flow rates
- Standing Bed Modules features curved, dense ClearWave blocks to create the largest possible surface area for ideal colonization of beneficial bacteria
- Beneficial bacteria growing on highly aerated biomedia remove toxins such as ammonium/ammonia, nitrites and nitrates
- Gravity-fed Discharge Module houses up to two pumps and two UVCs and features DN 110 and four 2" outlets ensuring maximum plumbing flexibility
- Bitron Premium 60 & 180 UltraViolet Clarifiers easily integrate to the outlets of the Discharge Module
- All Modules are easily drained and flushed for cleaning and maintenance via integrated sludge drains
- XL Systems can be operated and monitored remotely via Oase Control app with the Oase Control System (Garden Cloud Controller sold separately, page 130)

PROFICLEAR PREMIUM XL GRAVITY-FED FEATURES:



- 1. Microcontroller with digital thermometer automates cleaning functions and can be connected to an Oase Control (OC) system
- 2. Seven inlets allow for multiple intake locations throughout pond
- 3. Dirty water discharge 4" outlet
- 4. Removable 60 micron screens (included; multiple screen sizes available) provide easy access to the inside of the drum
- 5. High pressure spray bar removes fine particles from screens
- 6. Drain with integrated slide valve clears sludge for easy cleaning

- 7. Dual 180mm inter-module connectors ensure failsafe connections of Drum, Moving Bed, Standing Bed and Discharge Modules
- Made from German engineered GFK Duroplast for enhanced structural integrity
- Add additional Moving Bed and Standing Bed Modules for added biological filtration
- Discharge module houses up to two pumps and two UVCs before returning water through five DN 110 (require 4" rubber couplings) and four 2" outlets

ITEM	95197	73367	87166	73368	
DESCRIPTION	ProfiClear Premium XL Gravity-fed	ProfiClear Premium XL Moving Bed Module	ProfiClear Premium XL Standing Bed Module	ProfiClear Premium XL Gravity-fed Discharge Module	
VOLTS	120				
WATTS	5 / 1600 (cleaning)				
INLET	(7) DN 110 - require 4" rubber couplings	(2) 180mm	(2) 180mm	(2) 180mm	
OUTLET	(2) 180mm	(2) 180mm	(2) 180mm	(5) DN 110 - require 4" rubber couplings / (4) 2"	
WASTE DISCHARGE OUTLET	4" (DN 110)				
MIN FLOW		6,600 gph			
MAX FLOW		17,400	O gph		
COARSE DEBRIS EXTRACTION	60 microns				
RINSE PUMP	101 psi				
CORD LENGTH	16' + 16'				
DIMENSIONS	51"L x 34½"W x 32½"H		52½"L x 34½"W x 32¼"H		
POND VOLUME	up to 104,000 gal				
REQUIRES	#73367 Moving Bed Module or #87166 Standing Bed Module and #73368 Discharge Module	AquaOxy 450			
INCLUDES		60 liters PondPads			
WARRANTY	2-year + 1				

	CLEAR WATER GUARANTEE						
FISH LOAD			FUTED	Inc	DUMP		
LIGHT	MEDIUM	HEAVY	FILTER	UVC	PUMP		
<104,000 gal	<52,000 gal	<26,000 gal	ProfiClear Premium XL Gravity-fed	Bitron Premium 60 Bitron Premium 180	AquaMax Eco Expert 6800 AquaMax Eco Expert 11500 AquaMax Eco Expert 7100 12V		

74 OASE DRO





- Ultraviolet clarifiers clean and clear pond water with UVC band light
- Oase Vitronic UVC clarifiers offer powerful standalone clarification and integrate with Oase BioSmart filters
- Quick release ballast allows fast quartz sleeve maintenance and easy bulb changes
- Clear tubing adapters and indicator light show the clarifier is working
- Vitronic 18 and 36 watt units install easily on the housing of BioSmart filters (5000 & 10000 only)

ITEM	45427	56455	40350	
DESCRIPTION	Vitronic 9	Vitronic 18	Vitronic 36	
WATTS / UVC	9	18	36	
MAX FLOW	500 gph	925 gph 1585 gph		
MAX PRESSURE		7.25 psi / 17 ft. of head		
CORD LENGTH	10'	15'		
DIMENSIONS	13"L × 5"W × 4"H	21"L x 7"W x 5"H	21"L x 7"W x 5"H	
HOSE SIZE	34", 1", 1¼", 1½"	1", 1¼", 1½"		
POND VOLUME	up to 2,500 gal	up to 5,000 gal up to 10,000 gal		
WARRANTY	2-year			

CLEAR WATER GUARANTEE				
uvc	FILTER	PUMP		
Vitronic 18	BioSmart 5000	AquaMax Eco Premium 2500		
Vitronic 36	BioSmart 10000	AquaMax Eco Premium 3500		

TECH TIP

UVC bulbs have a service life of 9,000 hours, about a year of continuous use. At that point output drops to a level that is ineffective at controlling green water, so the bulb should be changed. Change the bulb early every spring, when nutrient levels accumulated over the winter are at their highest levels and plants other than algae are not yet actively growing. Replacement bulbs are available on page 184.





- Ultraviolet clairifiers clean and clear pond water with UVC light
- Oase Bitron C UVC clarifiers clean the green out of water in either standalone configurations or integrated with Oase filters
- Bitron C clarifiers mount directly to Oase BioTec Screenmatic² and ProfiClear Premium filters
- Quick-release fastener with safety switch provides fast, safe opening of bulb housing without fear of eye injury
- Inspection window allows visual inspection of the UVC bulb and self-cleaning feature
- Adjustable flow control optimizes water flow through the UVC chamber
- Automatic cleaning rotor powered by water flow, continuously glides around the quartz glass tube preventing debris from settling on quartz glass

ITEM	56936 57101		
DESCRIPTION	Bitron C 55	Bitron C 110	
WATTS / UVC	55	110	
MAX FLOW	8,000 gph	11,000 gph	
MAX PRESSURE	7.25 psi / 17 ft. of head	14.5 psi / 34 ft. of head	
CORD LENGTH	15'		
DIMENSIONS	24"L x 7"W x 7"H	29"L x 9"W x 8"H	
HOSE SIZE	3/4", 1", 11/4", 11/2", 2"		
POND VOLUME	up to 18,000 gal up to 36,000 gal		
WARRANTY	2-year		

CLEAR WATER GUARANTEE					
uvc	FILTER	PUMP			
Bitron C 55	BioTec ScreenMatic² 18000	AquaMax Eco Classic 3600			
Bitron C110	BioTec ScreenMatic² 24000	AquaMax Eco Premium 4500 AquaMax Eco Premium 3000 12V			
	ProfiClear Premium Compact-M Pump-fed	AquaMax Eco Classic 3600 AquaMax Eco Premium 4500 AquaMax Eco Expert 6800* AquaMax Eco Expert 5300 12V			
Bitron C 110	BioTec ScreenMatic ² 24000	AquaMax Eco Premium 4500			
	ProfiClear Premium Compact-L Pump-fed ProfiClear Premium Compact-L Gravity Fed BioTec ScreenMatic ² 39000	AquaMax Eco Premium 4500 / 5500 AquaMax Eco Expert 6800* AquaMax Eco Expert 5300 12V AquaMax Eco Expert 7100 12V*			

*Must adjust flow down to max flow of filter

OASE DRO





- Ultraviolet clarifiers clean and clear pond water by exposing it to powerful UVC light
- Bitron UVC Premiums are flow optimized, designed to spiral water around the lamp or lamps to maximize UV exposure time and eliminate algae and pathogenic bacteria
- Stainless-steel fasteners make installation easy either before or after the filter, vertically or horizontally
- Filtered inspection port and cut-off switch keep UV light inside the unit, ensuring against eye damage
- Advanced electronic ballast provides energy-efficient protection of ponds up to 36,000 gallons
- Use only one or two of the three lamps of Bitron Premium 180 for smaller loads, or add additional Bitrons for larger fish loads
- Pair with an Oase filter and pump for the Clear Water Guarantee

ITEM	95203 95204		
DESCRIPTION	Bitron Premium 60 W	Bitron Premium 180 W	
WATTS / UVC	60	180	
MAX FLOW	10,600 gph	26,400 gph	
MAX PRESSURE	8.7 psi / 20 ft. of head		
CORD LENGTH	16'		
DIMENSIONS	11"L x 7"W x 26%"H 15%"L x 12"W x 26%"H		
HOSE SIZE	DN110 - requires 4" rubber coupling (not included) / fittings available for recommended pumps (sold separately)		
POND VOLUME	up to 34,870 gal up to 36,000 gal		
WARRANTY	2-y	vear	

CLEAR WATER GUARANTEE					
uvc	FILTER	PUMP			
Bitron Premium 60 W	ProfiClear Premium Compact-L Pump-fed ProfiClear Premium Compact-L Gravity Fed	AquaMax Eco Premium 4500 AquaMax Eco Premium 5500 AquaMax Eco Premium 3000 12V			
	ProfiC lear Premium XL Pump-fed ProfiClear Premium XL Gravity-fed	AquaMax Eco Expert 6800 AquaMax Eco Expert 7100 12V			
Ditues of Department 100 W	ProfiClear Premium Compact-L Gravity Fed	AquaMax Eco Premium 4500 AquaMax Eco Premium 5500 AquaMax Eco Premium 3000 12V			
Bitron Premium 180 W	ProfiClear Premium XL Pump-fed ProfiClear Premium XL Gravity-fed	AquaMax Eco Expert 6800 AquaMax Eco Expert 11500 AquaMax Eco Expert 7100 12V			

*Must adjust flow down to max flow of filter







73934

73935



73937

• Biomechanical filters remove suspended solids, convert toxic ammonia and nitrites to harmless nitrates and aerate the pond

73936

- Atlantic's FilterFalls are designed to be able to expand filter capacity as ponds age and fish grow
- Efficient removal of toxins and floating particles from the water column improves water quality and clarity
- Oversized chamber contains more media material to start with, upgrades with additional filtration when needed and offers more choices of optional filtration media
- Overhanging weir with drip edge eliminates leaking due to silicone seal failure
- Multiple bulkhead locations allow maximum versatility in plumbing FilterFalls
- Reinforced body prevents warping and deformation for years of worry-free service
- $\bullet\,$ Support bars accommodate heavier stone and gravel for ease in camouflaging

ITEM	73934	73935	73936	73937	
MODEL	BF1600	BF1900	BF2600	BF3800	
DESCRIPTION	16" FilterFalls	19" FilterFalls	26" FilterFalls	38" FilterFalls	
WATERFALL WIDTH	16"	19"	26"	38"	
DIMENSIONS	21½"W x 19½"D x 17¾"H	28"W x 25"D x 21½"H	34½"W x 25"D x 23"H	46½"W x 30"D x 23"H	
PUMP FLOW RANGE	1,000 - 3,900 gph	2,500 - 4,000 gph	4,000 - 6,000 gph	6,000 - 8,000 gph	
BULKHEAD	1½"	2"		3"	
POND VOLUME	up to 1,250 gal	up to 2,000 gal	up to 4,000 gal	up to 8,000 gal	
MATCH TO	PS3900	PS4600	PS7000	PS15000	
INCLUDES	installation kit, male thread adapter and one-piece liner flange				
WARRANTY	Lifetime (enclosure)				

OASE PRO ATLANTIC



A pond should be a little slice of paradise in your backyard. A place to enjoy coffee each morning gazing at the beautiful fish and plants while listening to the tranquil sounds of water cascading down a waterfall. At the end of the day, a place to unwind next to the pond as the light of the sun slowly fades and subtle submerged lighting takes over, revealing a totally new side to your personal paradise.

This paradise isn't beyond reach, but daily and yearly maintenance may lead to unmet expectations and disappointment. What if maintenance became weekly or monthly, with major cleanouts deferred for years, or eliminated altogether? Imagine a pond system that exceeds your expectations and delivers what you expect, without constant attention, guaranteed. That is the Clear Water System.

The current practice, with the pump in the skimmer and an upflow filter, works very well. It collects floating debris, traps suspended solids and removes toxins through the balance between fish, plants and beneficial bacteria. Your pond will look great and hum along for the season, but this system comes at a cost. The balance that keeps the pond beautiful can shift as waste accumulates on the bottom. It will need to be removed, usually by draining and "mucking out" the pond, typically once a year. This has become the industry standard here.



There is another way of pondkeeping that concentrates on continually removing heavy solids as they settle, instead of skimming the surface. This way depends on pumps that sit on the bottom and suck up the muck, sending it to sophisticated filters. The filters mechanically remove solids, biologically treat wastes then expose the water to ultraviolet light to inhibit the growth of algae. This standard expects pondkeepers to use nets or pond vacuums to remove leaves and floating debris, typically daily. Still not ideal.

What if we could almost eliminate maintenance and just let your pond and fish and plants keep doing their thing year after year? That is what the Clear Water Pond System is all about.



The Clear Water Pond System doesn't depend on either standard; it combines the best of each. An Atlantic Skimmer removes floating debris before it can sink and keeps the waterfall pump flowing strong. An Oase pump at the bottom pulls in fish waste and sends it to a multistage filter. The EPA-certified filter screens out particulates mechanically, treats toxic ammonia, nitrite and nitrate biologically and clarifies water with ultraviolet light, delivering exquisite water clarity and quality.

Atlantic-Oase Clear Water System Kits are guaranteed to deliver clear water, even with fish loads that leave other ponds murky and dark. The pond you always wanted is as easy as picking a size – all components are expertly matched and everything is included. Routine maintenance is drastically reduced. AquaMax pumps are designed to go years in the bottom without clogging. Filters take minutes to clean, without getting yourself dirty. The UVC bulb takes five minutes to change, once every year or two. The System virtually ends major cleanouts.


This is the pond system you've been waiting for.

CLEAR WATER GUARANTEE



The Oase Clear Water Guarantee is your assurance of clear water down to three feet, a guarantee like no other.

Precisely engineered and matched components function in concert to remove not only suspended solids for excellent clarity, but toxic wastes as well, assuring high water quality. Filter pumps designed to pass solids pick up and deliver fish wastes to multistage filters. Filter foams of varying densities strip out solids and particulates. Beneficial bacterial colonies remove ammonia, nitrite and nitrate, eliminating nutrients in the water. Finally, water is bathed in ultraviolet light in an EPA-certified clarifier to further inhibit the growth of algae. You will be able to read the 1" mark on a measuring tape three feet below the surface, guaranteed.









94630



94631

- Pond kits provide all the equipment needed liner, pump, plumbing and filtration - to properly circulate and filter a pond
- Atlantic-Oase Clear Water System Kits provide the pond you always wanted but never had access to before
- Perfectly matched components remove leaves and debris off the surface, as well as heavy organics off the bottom, cleaning from the top down and the bottom up
- The complete solution to murky, dirty, green water, even with fish loads up to 10" per 100 gallons



94632

- Clean, crystal clear water, guaranteed see the Clear Water Guarantee for details
- Multi-stage complementary filtration reduces daily and yearly maintenance, so you can enjoy your pond more
- Add bacteria weekly to further reduce organic waste and control unwanted plant growth

ITEM	94629	94630	94631	94632		
MODEL	PKCW161515	PKCW191520	PKCW262020	PKCW382025		
DESCRIPTION	Small Clear Water System Kit	Medium Clear Water System Kit	Large Clear Water System Kit	Extra Large Clear Water System Kit		
LINER SIZE	15' x 15'	15' x 20'	20' x 20'	20' X 25'		
FASTFALLS	SP1600	SP1900	SP2600	SP3800		
SKIMMER	PS3900	PS4600	PS7000	PS15000		
FILTER	FiltoClear 3400	FiltoClear 5200	FiltoClear 8200	BioTec ScreenMatic² 18000 & Bitron C 55		
PUMP	TT2000 & AquaMax Eco Premium 2500	TT4000 & AquaMax Eco Premium 3500	TT6000 & AquaMax Eco Premium 4500	TT9000 & AquaMax Eco Premium 4500		
FALLSFOAM		(2) LF	F1100			
LIGHTING	(2) WWCS2 Spotlights and WW30X4 Transformer & Splitter			ner & Splitter		
CHECK VALVE		TR215CV				
UNDERLAYMENT	12' x 12'	12' ×	12' x 25'			
AUTO FILL	AF1000					
TUBING	1½" x 50' Flexible PVC	2" x 50' Flexible PVC		2" x 50' & 3" x 50' Flexible PVC		
POND SIZE	11'L x 11'W	11'L x 16'W	16'L x 16'W	16'L x 21'W		
INCLUDES		Installation Kit w/ PVC glue and thread sealant				

ATLANTIC-OASE ATLANTIC-OASE 81







74238 / 74239

74240 / 74241





74242 / 74243

- Atlantic Pond Kits save you time and money by avoiding costly mismatching and multiple trips to the store
- Skimmer, FilterFalls, pump and accessories are designed to work together to eliminate any guesswork
- Energy efficient pumps keep operating costs under control

- 74244 / 74245
- Medium, Large and Extra Large Kits include LED lighting to extend the enjoyment of the water feature into the evening
- An additional two lights may be added with no additional hardware necessary
- Extra Large Pond Kits measure 42"W x 36"H x 48"D and are supplied on a pallet

ITEM	74238	74239	74240	74241	74242	74243	74244	74245		
MODEL	PK161015	PK161515	PK191515	PK191520	PK261520	PK262020	PK382025	PK382530		
DESCRIPTION	Small Wate	r Garden Kit	Medium Wat	er Garden Kit Large Water Garden Kit			Extra Large Water Garden Kit			
LINER SIZE	10' x 15'	15'>	< 15 ¹	15'>	(20'	20' x 20'	20' X 25'	25' X 30'		
FILTERFALLS	BF1600			900	BF2	600	BF3	800		
SKIMMER	PS3900 F			600	PS7	000	PS15000			
PUMP	TT2000	TT3000	TT4000 TT5000 TT6000			TT9000	A-31			
FALLSFOAM	LF1100 (2) LF1100									
LIGHTING				(2) WWCS2	Spotlights and W	and WW30X4 Transformer & Splitter				
CHECK VALVE			TR21	I5CV			AWG	CV30		
UNDERLAYMENT		12' x 12'			12' x 25'		(2) 12	x 25'		
AUTO FILL				AF1	000					
TUBING	11/2" :	x 25'		2">	25'		3" x	50'		
POND SIZE	6'L x 11'W	11'L x	11'W	11'L x	16'W	16'L x 16'W	16'L x 21'W	21'L x 26'W		
INCLUDES			Install	ation Kit w/ PVC	glue and thread se	ealant				

STREAMBED LINER

Don't forget streambed liner! When ordering your Pond Kit simply add liner, tubing and a coupling for a stream that will really accent your pond

- For your Small Pond Kit order an 8' x 10' boxed liner, 1½" x 25' roll of tubing and 1½" coupling to add a six- to eight-foot stream to your pond
- For Medium and Large Pond Kits add a 10' x 15' boxed liner, 2" x 25' roll of tubing and 2" coupling for streams up to 13 feet long
- For Extra Large Pond Kits, add a 15' x 20' boxed liner, 3" x 50' roll of tubing and 3" coupling for streams up to 18 feet long



ITEM	74193	74187	74189		
MODEL	LI810-B	LI1015-B	LI1520-B		
LINER SIZE	8' x 10'	10' x 15'	15' x 20'		
TUBING NEEDED	#75251 / FH1525 - 1½" x 25' PVC Flex Pipe	#75253 / FH225 - 2" x 25' PVC Flex Pipe	#75255 / FH350 - 3" x 50' PVC Flex Pipe		
FITTING NEEDED	#74241 / 429-015 - 1½" Coupling	#74215 / 429-020 - 2" Coupling	#74216 / 429-030 - 3" Coupling		
STREAMBED LENGTH	up to 6'	up to 11'	up to 16'		

ATI ANTIC 83

SWIM POND GUIDE

Natural Swim pond or "recreational ponds" do away with conventional chemical filtration, employing instead the same biological processes that keep ponds and lakes clean in nature. Solids are removed by straining or settling. Dissolved toxins, such as ammonia and nitrite, are digested and converted into harmless nitrate. "Regeneration Zones" allow plants anchored in a layer of gravel to remove nitrates, keeping algae at bay by limiting available nutrients. These processes can be partially or completely mechanized with specially designed filters that automate some or all functions; the amount of mechanized filtration determines the Type of swim pond.

TYPE 1: NATURAL POND



- Pond with naturalized plantings, but without filtration, mechanized or otherwise.
- This is the typical "natural pond", often with algae, weed and stagnation issues.

TYPE 2: RECREATIONAL POND



- Pond filtered only by natural processes as water is pumped through a planted regeneration zone, with a 10:1 swim zone to regeneration zone volume ratio.
- Bacteria living on the surface of gravel convert toxic ammonia from fish wastes to nitrite then to harmless nitrate.
- Plants rooted in the gravel take up nitrate, effectively starving out algae.
- If the flow through the gravel is slow enough, regeneration zones can also settle out solids in the water.
- Requires only a circulation pump but can be equipped with a mechanical skimmer and aeration.

TYPE 3: SWIM POND - LIGHT FILTRATION




- Pond is filtered mostly by a planted regeneration zone, but assisted by mechanized filtration, with a 15:1 swim zone to regeneration zone volume ratio.
- The advantage of the mechanized filtration is the ability to polish the water that has been mostly stripped of solids and dissolved wastes by the regeneration zone.
- Requires pumped circulation to both the regeneration zone and the mechanized filter and typically includes a skimmer, UVC Clarifier and agration.

TYPE 4: SWIM POND - MEDIUM FILTRATION



- Pond is filtered mostly by mechanized filtration, but assisted with a regeneration zone, with a 30:1 swim zone to regeneration zone volume ratio.
- Regeneration zone primary function is removing the nitrates that are the byproduct of ammonia and nitrite removal.
- Since mechanized filtration takes up much less physical space than a regeneration zone doing the same job, these swim ponds can be built into smaller spaces.
- They may be gravity- or pump-fed and often automized to a greater or lesser degree, cleaning themselves, monitoring and sharing performance and environmental data and connecting to the cloud via Wi-Fi.

TYPE 5: SWIM POND - HEAVY FILTRATION

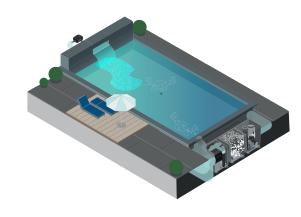

- Pond is filtered 100% by mechanized filtration
- Typically feature multiple inlets including bottom drains and wall skimmers, a large, high-capacity drum filter to remove solids mechanically, biological filtration via foams or moving media beds, one or more pumps, high-output UVC Clarifiers and aeration.
- Since mechanized filtration takes up much less physical space than a regeneration zone doing the same job, these swim ponds can be built into even smaller spaces.
- They may be gravity- or pump-fed and often automized to a greater or lesser degree, cleaning themselves, monitoring and sharing performance and environmental data and connecting to the cloud via Wi-Fi.

WHAT IS A REGENERATION ZONE?

Regeneration Zones are planted wetlands that remove suspended solids and dissolved toxins and nutrients in the water, leaving it clean and clear. A pump, typically drawing wastes off the bottom of the pond, delivers water into a reservoir of EcoBlox covered with a planted layer of gravel, typically 4"-8" thick. As the water loses velocity in the reservoir, suspended solids drop out; the slower the flow up through the gravel, the smaller the particles that drop out of suspension. The gravel supports colonies of billions of beneficial bacteria that convert wastes mainly to nitrate. The plants in the gravel bed take up the nitrates, removing the nutrient source that would otherwise nourish algae.

HOW TO SIZE REGENERATION ZONES & FILTRATION

- Step 1. Choose a swim pond type.
- **Step 2.** Determine the volume of your swim zone

Step 3: Based on your swim zone volume, size your regeneration zone and filtration based on the type. Divide the volume of your pond by the gallons per Eco-Blox to get your total size Regeneration Zone.

- Type 1: No regeneration zone / no filtration
- Type 2: 1 Eco-Blox per 150 gallons Regeneration zone only
- Type 3:1 Eco-Blox per 225 gallons Light filtration load
- Type 4: 1 Eco-Blox per 450 gallons Medium filtration load
- Type 5: No regeneration zone Heavy filtration load

Step 4: Choose the pump based on flow rates of the filter you choose.


Example: Type 4 Swim Pond: 16,000 gallon swim zone ÷ 450 gallons = 35.5 Eco-Blox need for regeneration zone. Choose a filter that can handle 16,000 gallons at Medium filtration Load = ProfiClear Compact-L Gravity-fed with Bitron Premium 60 W and an AquaMax Eco Premium 5500.

84 85


SWIM POND CONSTRUCTION

For easy comparison between swim pond types we have created the same sized swim pond (same swim zone), across the 4 different types. **Swim Zone:** 15' x 30' / **Volume of Swim Zone:** 16,000 gallons


TYPE 2 RECREATIONAL POND - REGENERATION ZONE ONLY

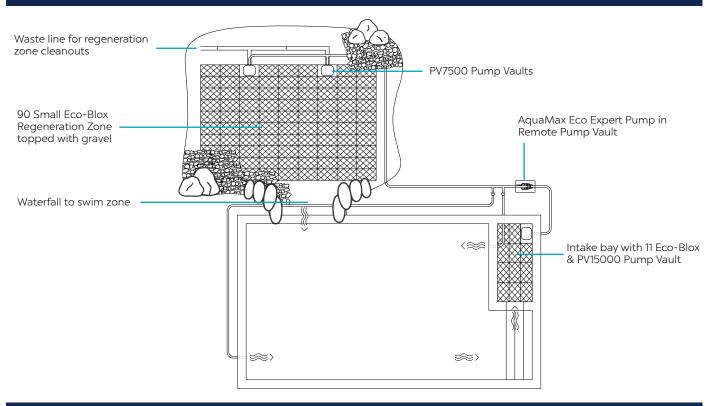


TYPE 3 SWIM POND - LIGHT FILTRATION

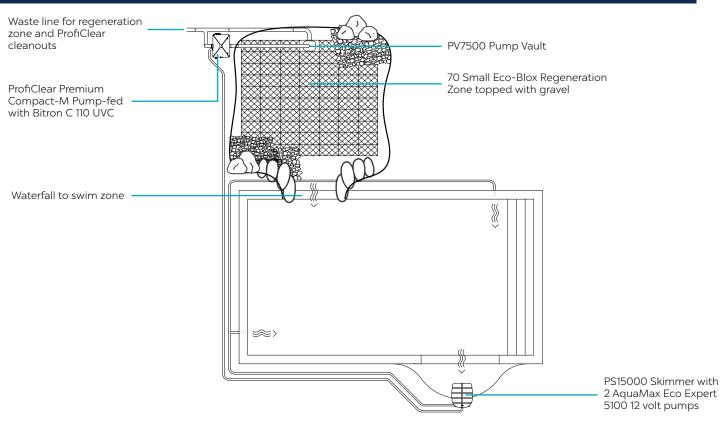

TYPE 4 SWIM POND - MEDIUM FILTRATION

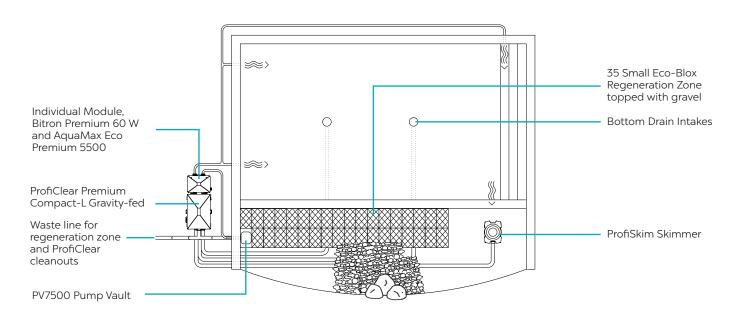

TYPE 5 SWIM POND - HEAVY FILTRATION

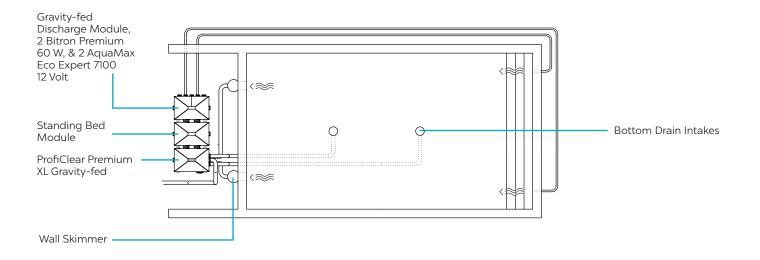



TECH TIP


On Gravity-fed ProfiClears, the maximum flow rate per 4" inlet is 2,500 gallons per hour. Using the appropriate amount of inlets to feed your filtration system is paramount since gravity-fed ProfiClears can filter up to 17,400 gallons per hour! Properly placed inlets make sure your swim pond is being properly circulated for the best water clarity and quality.

86

P) PUMP

Atlantic-Oase Pumps and accessories offer the perfect solution for all water features, large and small. Whether the application calls for Mag Drive or Direct Drive, Axial or Asynchronous, Synchronous or Brushless DC, line voltage or 12 volt, our pumps deliver the right flow at the right head for the right wattage. Advanced next generation design, top quality components and world class support ensure our pumps will provide years of trouble-free service.

- » Fountain pumps offer adjustable flows and multiple adapters for ease of installation and adjustment
- » Magnetic pumps make better flows at higher head heights and are the easiest to service in the industry
- » Asynchronous pumps have the most powerful, most efficient and smallest footprint on the market, offering tool-free maintenance and an optional Variable Speed Controller
- » Direct Drive pumps deliver high head and solids handling for the most demanding in-pond applications
- » Brushless DC fountain pumps offer up to 12 pre-programmed water displays, while Brushless DC filtration versions adjust from low to extremely high flows at very low wattages, both available in 12 volt

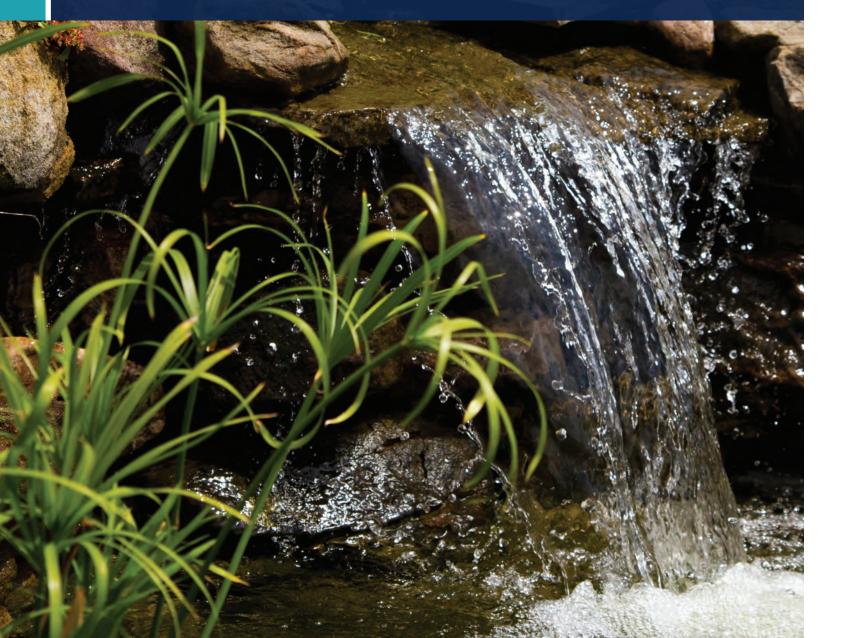

COMPREHENSIVE PUMP CHART

Not sure what pump you need? Check out our Choosing the Perfect Pump Bifold available on our website or find the steps in the back of our catalog on Page 172.

	MODEL	WATTS	MAX FLOW	Ш	5' 	10'	15'	20'	25'	30'	35'	40'	45 		50' 	55'
<u>₩</u>	90320	60	1700		1200	700	200									
ECO PREMIUM	90321	105	2600		1900	1250	650									T
ECO	90322	160	3700		3000	2150	1400	700								
=	40437	45	1200		1000											
ECO CLASSIC	57620	70	1900		960											+
CO CLASSI	57621	110	2700		1700											+
· 出	57623	150	3600		2400	1100									+	+
_	87581	60	2500												1	+
₹	87582	100	3500		1585	795	705									+
ECO PREMIUM	87583	140	4500		2380	1425	395								+	+
70 PF					3330	2140	870								-	+
Ж	87584	160	5500		4120	2615	1100									+
_	88675	95	3010		2400	150										+
PERT	88678	700	5300		4200	3175	2150	1200			_					+
ECO EXPERT	57964	440	6800		6700	5825	5200	3900	2825	1575		_			1	
	57978	700	11500		10300	9000	7450	6025	4600	3000						
_ _	88676	260	5100		3600	2400	150									
CO EXPER	88677	260	7100		5050	3000	325									
ECO EXPERT	57875	440	6800		6100	5000	3950	2600	850							
	57963	700	11500		10000	8400	68 <mark>50</mark>	5350	3900	15!50						
	45421	70	1650		1350	800										T
	45422	130	2300		1900	1420	700									
	45423	170	3700		2650	2100	1200									1
	45424	230	5150		4200	3300	2280	700								+
	45425	460	6600		5600	4500	3150	1720							1	+
	45426	600	8000		6600	5300	3950	2790							1	+
=	TT1500	101	1640		1060	350	3950	2/90								+
	TT2000	115	2640												+	+
				-	1760	715									-	+
	TT3000	173	3000		2180	1215	475				-				-	+
	TT4000	230	4490		3330	1785	700									+
	TT5000	310	5150		4255	3170	1615									+
	TT6000	334	6600		4915	3395	1750									+
	TT7500	520	7650		6300	4640	2860	1250							-	+
	TT9000	587	8800		7470	5990	4260	2595								\bot
_	PAF-20	360			2800	1950	1080					_				
	PAF-25	545			3900	3150	2300									
	PAF-40	650				4350	3570	2700								
	PAF-75	900					4560	3750	2 830							
	A-05	645					2500	2155	18 <mark>75</mark>	1455	935					
,	A-05L	725				4320	3600	2820	1920						1	1
	A-21	1060						4335	3770	3140	2400					
	A-31	1160				8150	6830	5535	4120	2535						+
	AN-32	2155				3130	3030	333	TIEU	9180	7920	6600	522	0		
	L-305	710	11400		10790	7700					7920	- 3000	322			
	<u> </u>	, 10	11-00		10380	7380									-	

*All flows in gallons per hour (GPH) Recommended Operating Range


Do Not Operate Range





- Fountain Pumps offer Magnetic Induction performance and replaceable components in a tiny footprint for the smallest water features
- Atlantic FP-Series Pumps fit in the smallest spaces for reliable, adjustable performance in your wall and table top fountains
- Integrated valve allows flow adjustment in spaces where a separate valve wouldn't fit
- Removable washable foam filter protects internal components from wear
- ${\boldsymbol{\cdot}}$ Standard size fittings facilitate connection to various sizes and types of tubing
- Energy efficient motors keep operating costs to a minimum
- Impeller assemblies replace quickly, no tools needed for extended service life

ITEM	73816	73817	75472	73818	75474				
MODEL	FP100	FP200	FP300	FP400	FP500				
DESCRIPTION	FP-Series - 100 gph	FP-Series - 200 gph	FP-Series - 300 gph	FP-Series - 300 gph FP-Series - 400 gph					
VOLTS	115								
WATTS	7	9.5	16	24	33				
INLET	Adjustable								
OUTLET	1/2" ∧	MIPT	½" FIPT						
CORD LENGTH	6	5'	16'						
DIMENSIONS	3½"L x 2¼	'W x 2½"H	5"L x 3"V	V x 31/4"H	51/4"L x 31/2"W x 4"H				
OUTLET FITTING		½" - ¾" Insert							
WARRANTY			1-year						

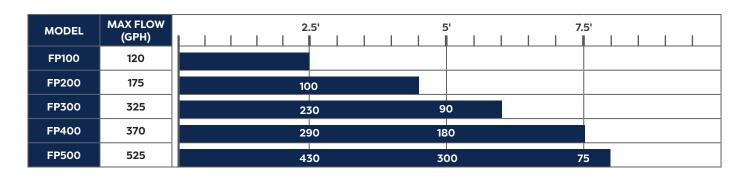




- Synchronous Magnetic Induction fountain pumps offer high efficiency and low power consumption in a small form factor
- Oase Fountain Pumps are ideal for small garden, wall and table top fountains
- With built-in adjustable flow control, suction cups for stabilization and grounding plate for an added measure of protection
- Energy efficient motors keep operating costs to a minimum
- Includes fittings to accept Oase Kink-free hose
- Replaceable components assure a long service life
- Accessorize with Oase 4-pattern Nozzle Set for added visual interest page 38 (Fountain Pump 320 & 525 only)



ITEM	45417	45413	45414	45416					
DESCRIPTION	Fountain Pump 90	Fountain Pump 150	Fountain Pump 320	Fountain Pump 525					
VOLTS		12	0						
WATTS	4	7	23	42					
CORD LENGTH	6	5'	16'						
DIMENSIONS	3"L x 1½"W x 2¼"H	3½"L x 1¾"W x 2½"H	4"L x 2"W x 3"H	4½"L x 2½"W x 3½"H					
HOSE SIZE	3/8",	1/2"	½", ¾"	1/2", 5/8", 3/4"					
WARRANTY	2-year + 1								

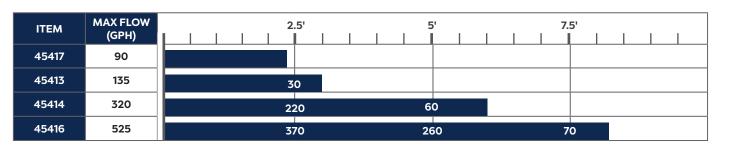

90 ATI ANTIC





90320 90321

- Oase synchronous electronic pumps are designed for both submersible and in-line water feature applications
- Oase Aquarius pumps are powerful, energy efficient pumps that excel in fountain applications
- Aquarius Eco Premium are the latest generation of fountain pump utilizing Oase Pulse 6 Technology, for smoother running, quieter, • Aquarius Eco Premium pumps are designed to run in a variety of more powerful and more efficient performance
- Patented Dynamic Function Control (DFC) offers a built-in 'scene' of changing water patterns and various fountain heights accessed by an onboard switch
- Oase Control compatibility offers 11 more dancing water scenes, page 174 directly through optional Eco Control or via WiFi on any smart device with the Oase Garden Cloud Controller

90322

- Unique patented frost protection safeguards pumps against frost or freezing down to -4°F so they can remain in place all winter long
- Environmental Function Control (EFC) shuts off the pump to protect it when run dry or clogged, while an integrated grounding plate protects against stray current in the water feature
- environments, including fresh, salt and chlorinated water
- Suction Adapter included to allow the pump to continue to function at very low water levels


ITEM	90320	90321	90322				
DESCRIPTION	Aquarius Eco Premium 1700	Aquarius Eco Premium 2600	Aquarius Eco Premium 3700				
VOLTS		120					
AMPS	0.9	1.6	2.4				
WATTS	60	105	160				
INLET	1½"						
OUTLET	1"	17/	2				
CORD		20'					
DIMENSIONS	11½"L x 5¼"W x 7"H	121/4"L x 53/4	"W x 8¾"H				
OUTLET FITTING	¾", 1", 1¼", 1½", Sch40 1¼" - 1½" adapter	3/4", 1", 11/4", 11/2", Sch40 11/4" - 11/2" adapter 1", 11/4", 11/2", Sch40 11/4" - 11/2" adapter					
WARRANTY		3-year + 2	_				

ITEM	MAX FLOW (GPH)	5'	10'	15'	:	20' 25'
90320	1700	1200	700	200		
90321	2600	1900	1250	650		
90322	3700	3000	2150	1400	7	700
Recommende	ed Operating Range	Best Efficiency Range	Do Not Operate Range	e		



- Magnetic Induction pumps provide years of service under the demanding conditions of smaller ponds, waterfalls and fountains
- · Atlantic MD-Series pumps feature better flows at higher heads, a longer warranty and are easier to service
- Male threads on both inlet and outlet are less restrictive for higher flow
- Volute can be oriented in 4 ways for maximum versatility in placement
- A quarter-turn accesses replaceable impeller assembly for easy periodic cleaning to keep pump running for years
- Large, stable base for anchoring pump may be removed in tight applications
- Removable pre-filter and oversized ceramic shaft reduce internal wear and extend service life
- Included outlet fittings are tapered to fit a wide array of tubing types and sizes

ITEM	73822	73824	73825	73819	73820	73821				
MODEL	MD250	MD550	MD750	MD1000	MD1250	MD1500				
DESCRIPTION	MD-Series - 250 gph	MD-Series - 550 gph	MD-Series - 750 gph	MD-Series - 1000 gph	MD-Series - 1250 gph	MD-Series - 1500 gph				
VOLTS	115									
WATTS	15	40	50	90	120	165				
INLET		1" MIPT			1½" MIPT					
OUTLET		3/4" MIPT		1" MIPT						
CORD LENGTH			2	0'						
DIMENSIONS		4½"L x 3½"W x 5"H		5½"L x 4¼"W x 5½"H 6"L x 4¾"W						
OUTLET FITTING		³¼" - 1" Step		1" - 1½" Step / 1" FIPT x 1½" FIPT adapter						
WARRANTY			5-year	Limited						

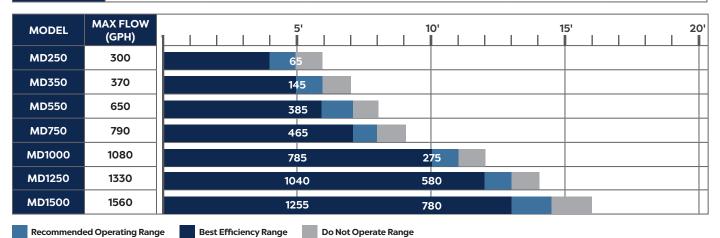







- Brushless DC pumps are powerful, next generation pumps for demanding applications requiring powerful flows and economical water delivery
- Oase Aquarius Eco Expert are specifically designed for the most demanding fountain applications
- Aquarius Eco Expert 12 volt pumps were designed specifically for fountains where submersible line voltage pumps are prohibited
- Robust stainless steel intake mesh screens out debris particles over ¾", while integrated grounding plate offers unparalled safety
- Unique patented frost protection safeguards pump from freeze damage down to -4°F so they can remain in place all winter long



- Integrated Environmental Function Control automatically shuts off the pump in run dry conditions to prevent motor damage
- Built in Dynamic Function Control (DFC) offers 1 pre-programmed scene, alternating fountain heights; connect pump to controller for 11 additional pre-programmed scenes, see page 174
- Eco Control and Garden Cloud Controller operate and monitor pump remotely (sold separately)
- Submersed or inline installation in a variety of water types, including chlorinated pool and salt water, see page 95
- 32' 12 volt extension cables available, see page 184

ITEM	57964	57978	88678				
DESCRIPTION	Aquarius Eco Expert 7300	Aquarius Eco Expert 11500	Aquarius Eco Expert 5300 - 12 V				
VOLTS	220 - 240 V	/ / 50-60 Hz	100 - 120 V / 50-60 Hz				
AMPS	2	3.5	2.2				
WATTS	440	700	240				
INLET	G2 (#85310 adapter available) / 2½" Kink-free						
OUTLET		2"					
MAX SOLIDS SIZE		3/1611					
CORD	3	3'	8' + 26'				
DIMENSIONS	19"L x 8½"W x 8"H	21"L x 9¾"W x 8¾"H	19½"L x 9½"W x 8½"H				
OUTLET FITTING		Sch40 1½" - 2" adapter / 1½" & 2" Kink-free	2				
WARRANTY		3-year + 2					

AQUARIUS ECO EXPERT FEATURES:

- 1. Ergonomic handle aligns with the pump's center of gravity.
- 2. Integrated mounting holes in the base enable fixed installation.
- 3. Rotatable volute handles multiple configurations.
- 4. Robust stainless steel intake screen prevents debris entering.
- 5. Dynamic Function Control (DFC) switch enables 1 preprogrammed water pattern
- 6. Grounding plate safeguards against short circuits anywhere in the water feature.
- 7. EGC connections provide input/output to an additional 9 devices, remotely from anywhere in the world.



MODEL	MAX FLOW (GPH)		5'	10'	15'	20'	25' 	30'	35'
57964	7300	67	00	5825	5200	3900	2825	1575	
57978	11500	103	500	9000	7450	6025	4600	3000	
88678	5300	42	00	3175	2150	1200			

	ACCEPTABLE WATER QUALITY RANGE											
	pH VALUE	HARDNESS	FREE CHLORINE	CHLORIDE CONTENT	SALT CONTENT	OVERALL DRY RESIDUE	TEMPERATURE					
FRESHWATER	6.8 - 8.5	142 - 267 ppm	<0.3 ppm	<250 ppm	<0.4%	<50 ppm	39° - 95°F					
POOLWATER	7.2 - 8.3	142 - 267 ppm	<0.6 ppm	<250 ppm	<0.4%	<50 ppm	39° - 86°F					
SALTWATER	7.2 - 8.5	256 - 534 ppm	<0.3 ppm	<22000 ppm	<4.0%	<50 ppm	39° - 82°F					

CONTROLLERS

The Aquarius Eco Expert has two options to remotely control the pump.

ECO CONTROL*

Eco Control is an innovative controller that directly connects to the pump to regulate all functions, with an easy-to-read illuminated two-line display. See page 108 for more information.

The Eco Control standalone controller provides:

- Dynamic Function Control (DFC) of expanded library of 12 pre-programmed water patterns, see page 174
- · Complete adjustment of output flow
- Power consumption read-out
- Pump status and malfunctions display
- Real time rotation speeds
- Total runtime data

*Not useable if the pump is connected to an OC network



Eco Control

OASE CONTROL (OC)

Connect your Aquarius Eco Expert to the Oase Control (OC) to operate the pump from anywhere in the world on any Android or Apple Device with Oase Control mobile application. See page 130 for more information.

Oase Control can display and/or control a variety of functions including:

- Dynamic Function Control (DFC) of expanded library of 12 pre-programmed water patterns, see page 174
- Complete adjustment of output flow
- Operation status
- Water temperature
- Power consumption
- Overall performance data
- Performance charts over time





95

OASE PRO OASE PRO





- Synchronous magnetic pumps are specifically designed to create falls in Water Garden and Pond-free applications
- Oase Waterfall Pumps are reliable, energy efficient pumps that excel in hard water conditions
- Grounding plate eliminates any chance of stray current entering water for unparalled safety
- Replaceable coated magnetic rotors resist scale and poor water quality conditions (1650-5150)
- Tool-less volute removal makes maintenance fast and easy (1650-5150)
- Asynchronous 6600 and 8000 feature replaceable corrosion resistant rotors
- Self-cooling, debris flushing rotor chambers keep pumps from overheating in the most demanding applications
- Waterfall Pump 6600 and 8000 can be plumbed for inline applications


ITEM	45421	45422	45423	45424	45425	45426					
DESCRIPTION	Waterfall Pump 1650	Waterfall Pump 2300	Waterfall Pump 3700	Waterfall Pump 5150	Waterfall Pump 6600	Waterfall Pump 8000					
VOLTS		120									
AMPS	0.75	1.2	1.5	2.2	3.8	4.8					
WATTS	70	130	170	230	460	600					
OUTLET	11/4" /	MIPT	1½" MIPT	2" MIPT							
CORD LENGTH			2	0'							
DIMENSIONS	8½"L x 5"	W x 6¼"H	9½"L x 5½'	'W x 6½"H	12"L x 6¾"W x 8½"H						
OUTLET FITTING	1'' - 1½	" Step	1½" - 2" Step								
WARRANTY			3-7	/ear							

MODEL	MAX FLOW	5'	10'	15'	20'	25'	30
	(GPH)						
45421	1650	1350	800	100			
45422	2300	1900	1420	700			
45423	3700	2650	2100	1200			
45424	5150	4200	3300	2280	700		
45425	6600	5600	4500	3150	1720		
45426	8000	6600	5300	3950	2790	1620	



- Synchronous electronic pumps are designed for in-pond applications where debris is delivered through the pump to a filtration system
- Oase AquaMax Eco Classic is an energy efficient, solids handling pump with a large intake pre-filter and Environmental Function Control
- Environmental Function Control (EFC) automatically shuts off the pump if dry run or clogged to prevent pump damage
- Large-surface, wrap-around pre-filter allows coarse debris particles up to ½" to pass through pump; may be removed for in-line use
- AquaMax Eco Classic features a coated magnetic rotor for adverse water conditions and proprietary grounding plate for unparalled safety

ITEM	40347	57620	57621	57623					
DESCRIPTION	AquaMax Eco Classic 1200	AquaMax Eco Classic 1900	AquaMax Eco Classic 2700	AquaMax Eco Classic 3600					
VOLTS		120							
AMPS	1.2	1.3	1.4	1.7					
WATTS	45	70	110	150					
CORD LENGTH		2	0'						
DIMENSIONS		11"L x 9"\	W x 5½"H						
HOSE SIZE		1" 1¼",	1½", 2"						
OUTLET FITTING		metric pivoting step fitting (1"	1¼", 1½"), Sch40 1½" / 2" adapter						
WARRANTY		2-ye	ar + 1						

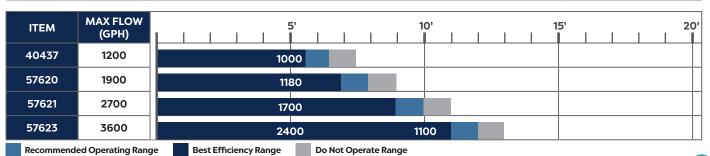

CLEAR WATER GUARANTEE								
PUMP	FILTER	uvc						
AquaMax Eco Classic 1200	BioPress1000	Included w/Filter						
A sura Mau Foe Classic 1000	BioPress 1600 / FiltoClear 3400	Included w/Filter						
AquaMax Eco Classic 1900	BioSmart 5000	Vitronic 18						
AquaMax Eco Classic 2700	BioPress 2400 / FiltoClear 5200	Included w/Filter						
Aqualviax ECO Classic 2700	BioSmart 10000	Vitronic 36						
AquaMax Eco Classic 3600	FiltoClear 8200	Included w/Filter						
Aquaiviax ECO Classic 3600	BioTec ScreenMatic² 18000 / 24000	Bitron C 55						

96 \triangle \subseteq \subseteq 97





- Synchronous electronic pumps are designed for in-pond applications where debris is delivered through the pump to a filtration system
- Oase AquaMax Eco Premium is an energy efficient solids-handling pump with a second intake that can connect to an optional auxillary intake or skimmer
- Motors with Pulse 6 technology with patented Seasonal Flow Control (SFC) can be regulated by manually or by optional Oase Eco Control or Garden Cloud Controller
- Patented Seasonal Flow Control (SFC) slows flow and reduces wattage up to 50% as water temperatures drop
- Environmental Function Control (EFC) automatically shuts off the pump if dry run or clogged to prevent pump damage
- Unique patented frost protection safeguards pump free from damage down to -4°F so they can remain in place all winter long
- Pump can be used in-line by removing large-surface, wrap-around pre-filter pre-filter and using mounting bracket to secure
- Pump features a grounding plate for unparalled safety

ITEM	87581 87582		87583	87584					
DESCRIPTION	AquaMax Eco Premium 2500	AquaMax Eco Premium 3500	AquaMax Eco Premium 4500	AquaMax Eco Premium 5500					
VOLTS		120							
AMPS	1.0	1.6	2.2	2.4					
WATTS	60	100	140	160					
INLET		2	ıı -						
OUTLET		2	,n						
MAX SOLIDS SIZE		3/	B II						
CORD		2	0'						
DIMENSIONS		13½"L x 11"W x 6½"H							
OUTLET FITTING		1", 1¼", 1½", Sch40	1½" - 2" adapter						
WARRANTY		3-yea	ar + 2						



AQUAMAX ECO PREMIUM 12 VOLT



ITEM	88675			
DESCRIPTION	AquaMax Eco Premium 3000 - 12V			
VOLTS	100 - 120V / 50-60 HZ			
WATTS	95			
INLET	2"			
OUTLET	2"			
MAX SOLIDS SIZE	3/8"			
CORD	8' + 26'			
DIMENSIONS	11"L x 6½"W x 3½"H			
OUTLET FITTING	1" 1¼", 1½", Sch40 1½" - 2" adapter			
WARRANTY	3-year + 2			

- Synchronous electronic 12 volt pumps are designed for applications where submersible line voltage pumps are prohibited
- Oase AquaMax Eco Premium 12 volt is an energy efficient pump are perfect for use inline for recreational ponds or in submersible applications
- Patented Seasonal Flow Control (SFC) slows flow and reduces wattage up to 50% as water temperatures drop
- Environmental Function Control (EFC) automatically shuts off the pump if dry run or clogged to prevent pump damage
- Unique patented frost protection safeguards pump free from damage down to -4°F so they can remain in place all winter long
- Pump can be used in-line by removing large-surface, wrap-around pre-filter pre-filter and using mounting bracket to secure
- Pump features a grounding plate for unparalled safety
- 32' 12 volt extension cables available, see page 184

	ACCEPTABLE WATER QUALITY RANGE											
	PH VALUE HARDNESS FREE CHLORINE CHLORIDE CONTENT SALT CONTENT RESIDUE											
FRESHWATER	6.8 - 8.5	0.45 - 0.84 ppm	<0.3 ppm	<250 ppm	<0.4%	<50 ppm	39° - 95°F					
POOLWATER	7.2 - 8.3	0.45-0.84 ppm	<0.6 ppm	<250 ppm	<0.4%	<50 ppm	39° - 86°F					
SALTWATER	7.2 - 8.5	1.12 - 1.68 ppm	<0.3 ppm	<22000 ppm	<4.0%	<50 ppm	39° - 82°F					

CLEAR WATER GUARANTEE								
PUMP	FILTER	uvc						
Acual May Foe Dramain as 2500	BioPress 1600 / FiltoClear 3400	Included						
AquaMax Eco Premium 2500	BioSmart 5000	Vitronic 18						
Asual Asu Fas Dramair na 7500	BioPress 2400 / FiltoClear 5200	Included						
AquaMax Eco Premium 3500	BioSmart 10000	Vitronic 36						
	FiltoClear 8200	Included						
Agual May Foe Dyamaiy mg 4500	BioTec ScreenMatic2 18000/24000/39000	Bitron C 55						
AquaMax Eco Premium 4500	ProfiClear Premium Compact-M	Bitron C 55 / 110						
	ProfiClear Premium Compact-L	Bitron C 110						
Anual Any For Dyamais in FEOO	BioTec ScreenMatic2 39000	Bitron C 110						
AquaMax Eco Premium 5500	ProfiClear Premium Compact-L	Bitton C 110						
	BioSmart 10000	Vitronic 36						
	BioTec ScreenMatic² 18000	Bitron C 55						
AquaMax Eco Premium 3000 12V	BioTec ScreenMatic² 24000	Bitron C 110						
	ProfiClear Premium Compact-M	Bitron C 55 / 110						
	ProfiClear Premium Compact-L	Bitron C 110						

OASE DRO OASE DROS






- Asynchronous Pumps combine the efficiency of Magnetic Induction with the power of Direct Drive geometry, keeping operating and ownership costs to
- Atlantic TT-Series pump more water for less watts, making them the ideal choice for water gardens and continuously operated water features
- Compact design fits the tightest pump chambers, perfect for vertical and multiple
- Excellent resistance to fouling in hard water environments and simple maintenance keeps pumps running in adverse conditions
- Ribs and large openings in pre-filter and handle provide tremendous surface area for greater clog resistance, decreasing upkeep and increasing pump life

ITEM	73924	73925	73926	73927	73928	73929	73930	73931	
MODEL	TT1500	TT2000	TT3000	TT4000	TT5000	TT6000	TT7500	ТТ9000	
DESCRIPTION	TT-Series - 1500 gph	TT-Series - 2000 gph	TT-Series - 3000 gph	TT-Series - 4000 gph	TT-Series - 5000 gph	TT-Series - 6000 gph	TT-Series - 7500 gph	TT-Series - 9000 gph	
VOLTS	120								
AMPS	0.88	1.0	1.5	2.0	2.7	2.9	4.4	5.1	
WATTS	101	115	173	230	310	334	520	587	
INLET		11/2" /	ИIPT			2" N	ИІРТ		
OUTLET		11/2"	FIPT		2" F	-IPT	2" FIPT /	′ 3"MIPT	
CORD LENGTH				2	0'				
DIMENSIONS	8"L x 5¼"W x 6¼"H				91/4"L x 6"W x 7"H 11"L x 7			"W x 8"H	
OUTLET FITTING	1" - 1½" Step				2" Ir	nsert			
WARRANTY				3-y	ear				

TECH TIP

Servicing pumps has never been easier! With a rotor wrench built into the prefilter, TT-Series pumps can be cleaned and serviced without tools. Simply unlatch the prefilter, twist the volute a quarter turn to remove, and use the notch and two slots in the prefilter on the tabs to unlock the rotor.



TT-SERIES PUMP FEATURES:

1. Large threaded inlet and outlet for less restriction and greater flows.

2. Quarter-turn volute provides access to impeller without the use

3. Heavy-duty pre-filter locks in place. Large openings and increased surface area resist clogging.

4. Three-vane hybrid impeller improves flows and passes solids easily.

5. Additional perforations in handle provide greater surface area.

6. Energy efficient asynchronous motor is up to 30% more efficient

7. All TT-Series models are compatible with the Variable Speed Controller.

8. All models feature 20' power cord and three-year warranty.



Variable Speed Controller -Page 109



MODEL	MAX FLOW (GPH)	5'	10'	15'	20'	25' 30'
TT1500	1640	1060	350			
TT2000	2640	1760	715	150		
TT3000	3000	2180	1215	475		
TT4000	4490	3330	1785	700	90	
TT5000	5150	4255	3170	1615	395	
TT6000	6600	4915	3395	1750	265	
TT7500	7650	6300	4640	2860	1250	
TT9000	8800	7470	5990	4260	2595	1005

Recommended Operating Range Best Efficiency Range Do Not Operate Range





- Brushless DC pumps are powerful, energy efficient filtration pumps for demanding filter systems and large waterfalls
- Oase AquaMax Eco Expert are next generation pumps outstandingly suited for powerful and economical water delivery
- Oase AquaMax Eco Expert 12 Volt pumps are perfect for recreational ponds where line voltage pumps are prohibited
- Patented frost protection protects against freeze damage down to -4°F while grounding plate safeguards against stray current
- Integrated Environmental Function Control automatically shuts off the pump in run dry conditions to prevent motor damage
- Patented Seasonal Flow Control (SFC) slows flow and reduces wattage up to 50% as water temperatures drop
- Submersed or inline installation in a variety of water types, including chlorinated pool and salt water, see page 103
- Eco Control and Garden Cloud Controller operate and monitor pump remotely
- 32' 12 volt extension cables available, see page 184

ITEM	57875 57963		88676	88677		
DESCRIPTION	AquaMax Eco Expert 6800	AquaMax Eco Expert 11500	AquaMax Eco Expert 5300 - 12V	AquaMax Eco Expert 7100 - 12V		
VOLTS	220 - 240 V	/ 50-60 Hz	100 - 120V	/ 50-60 HZ		
AMPS	2	3.5	2	.2		
WATTS	440	700	26	50		
INLET		G2 (#85310 ad	apter available)			
OUTLET		2	2"			
MAX SOLIDS SIZE		7/	/ II 16			
CORD	3:	3'	8' +	26'		
DIMENSIONS	19"L x 8½"W x 8"H	21"L x 9¾"W x 8¾"H	19¼"L x 9½"W x 8¼"H	21¼"L x 9¾"W x 8¾"H		
OUTLET FITTING		Sch40 1½" -	2" adapter			
WARRANTY	3-year + 2					

ITEM	MAX FLOW (GPH)	5' 	10'	15'	20'	25' 	30' 	35'
57875	6800	6100	5000	3950	2600	850		
57963	11500	10000	8400	6850	5350	3900	1550	
88676	5100	3600	2400	150				
88677	7100	5050	3000	325				

AQUAMAX ECO EXPERT FEATURES:

- 1. Ergonomic handle aligns with the pump's center of gravity.
- 2. Integrated mounting holes in the base enable fixed installation.
- 3. Rotatable volute handles multiple configurations.
- 4. Robust stainless steel intake screen prevents large debris entering pump.
- 5. Seasonal Flow Control (SFC) switch lowers flow and wattages as water cools to 40°F.
- 6. Grounding plate safeguards against short circuits.
- 7. EGC connections provide input/output to an additional 9 devices, remotely from anywhere in the world.



	ACCEPTABLE WATER QUALITY RANGE												
PH VALUE HARDNESS FREE CHLORINE CHLORIDE SALT CONTENT OVERALL DRY RESIDUE													
FRESHWATER	6.8 - 8.5	142 - 267 ppm	<0.3 ppm	<250 ppm	<0.4%	<50 ppm	39° - 95°F						
POOLWATER	7.2 - 8.3	142 - 267 ppm	<0.6 ppm	<250 ppm	<0.4%	<50 ppm	39° - 86°F						
SALTWATER	7.2 - 8.5	256 - 534 ppm	<0.3 ppm	<22000 ppm	<4.0%	<50 ppm	39° - 82°F						

CLEAR WATER GUARANTEE						
РИМР	FILTER	UVC				
Acusal Mary Face Friends COOO*	ProfiClear Premium Compact-M	Bitron C 55 & Bitron C 110				
AquaMax Eco Expert 6800*	ProfiClear Premium Compact-L	Bitron C 110				
AquaMax Eco Expert 11500*	BioTech ScreenMatic² 39000	Bitron C 110				
AquaMax Eco Expert 5300 12V AquaMax Eco Expert 7100 12V	ProfiClear Premium Compact-M Pump-fed ProfiClear Premium Compact-L Pump-fed ProfiClear Premium Compact-L Gravity-fed BioTec ScreenMatic ² 39000	Bitron C 110				

^{*}Must adjust flow down to Max flow of filter

CONTROLLERS

The AquaMax Eco Expert has two options to remotely control the pump

ECO CONTROL*

Eco Control is an innovative controller that directly connects to the pump to regulate all functions, with an easy-to-read illuminated two-line display. See page 108 for more information.

The Eco Control standalone controller provides:

- Seasonal Function Control (SFC)
- · Complete adjustment of output flow
- Power consumption read-out
- Pump status and malfunctions display
- Real time rotation speeds
- · Total runtime data

*Not useable if the pump is connected to an Oase Control network

OASE CONTROL (OC)

Connect your AquaMax Eco Expert to the Oase Control (OC) to operate the pump from anywhere in the world on any Android or Apple Device with Oase Control mobile application. See page 130 for more information.

Oase Control can display and/or control a variety of functions including:

- Seasonal Function Control (SFC)
- · Complete adjustment of output flow
- Operation status
- Water temperature
- Power consumption
- Overall performance data
- Performance charts over time











73903 TUP2000 Pool Cleanout Pump
Pool Cleanout Pump
·
1/5 HP
120
2.9
330
1¼" MPT
20'
5½"W x 12½"H
Tapered 1¼" / 1½" for standard pool hoses
1-year Limited

- Pool cleanout pumps are designed to allow complete drainage of Shallow water bottom intake drains water down to as little as the water in a typical swimming pool or spa
- Atlantic's Pool Cleanout Pump features 316 stainless steel and composite construction resists chlorine, salt and acid
- ${\:\raisebox{3.5pt}{\text{\circle*{1.5}}}}$ Small diameter fits into most swimming pool drains, to drain pools dry
- High visibility low water level indicator band shows water level at a distance
- 1/2" of depth
- Flow-through internal cooling keeps pump from overheating even when not fully immersed
- Continuous duty motor features double mechanical seals and thermal overload protection
- Includes backwash hose adapter fitting, heavy duty top handle and strain relief to protect cord

MODEL	MAN	FLOW					5'				10'				15'			20'			25'
MODEL	MAA	FLOW	\square															上			丄
TUP2000	GPM	34				2	9.5			2	3.8				17			4			
1072000	GPH	2040				17	770			14	28			10	20		2	40			
Pecommende	ad Operat	ina Panao		Roct I	fficior	ocy Pan	a o	l Do	Not O	norat	a Dan	ao.									

DID YOU KNOW?

Atlantic's Pool Cleanout Pump is designed to drain pools and spas down to the last $\frac{1}{2}$ " of water. And don't worry about burning the pump out as the water drops. Flow-through internal cooling and automatic thermal shut off protection keep the pump cool, making this the perfect pump for all of your maintenance needs.





- Direct Drive pumps are perfect for demanding medium head, high-volume applications
- Atlantic PAF-Series pumps feature energy efficient direct drive motors, double silicone carbide mechanical seals and fiber-reinforced vortex impellers to ensure dependable, long lasting continuous duty service
- Removable intake screen converts pump from clean water service in skimmers to 11/4" solids handling capacity in ponds
- Stainless steel and high impact FRP composite housings are rugged and lightweight, for easier servicing and long life
- Overload and thermal protection shut down pump before overheating can cause damage

73899	
	@.
The state of the s	
T	

(**(1)**

ITEM	73899	73900	73901	73902		
MODEL	PAF-20	PAF-25	PAF-40	PAF-75		
DESCRIPTION	PAF-Series - 1/4 HP	PAF-Series - 1/3 HP	PAF-Series - 1/2 HP	PAF-Series - 1 HP		
MOTOR	1/4 HP	1/3 HP	1/2 HP	1 HP		
VOLTS		11	5			
AMPS	3.5	5	6	8.5		
WATTS	360	545	650	900		
OUTLET		2" F	FIPT			
CORD LENGTH		2	0'			
DIMENSIONS	9"L x 6"W x 14"H	9"L x 6"W x 14½"H	W x 15"H			
OUTLET FITTING		2" Insert				
WARRANTY	2-year					

MODEL	MAX FLOW (GPH)	5'	10'	15'	20'	25'	30'	35'
PAF-20		2800	1950	1080	180			
PAF-25		3900	3150	2300	1350	240		
PAF-40		4950	4350	3570	2700	1700	520	
PAF-75		5950	5270	4560	3 750	2830	1770	550
Recommend	led Operating Rang	e Best Efficiency	Range Do N	Not Operate Range		,		





- A-Series Direct Drive pumps are built for the highest head, high volume applications, to tackle the longest runs and tallest falls
- A-Series pumps feature heavy-duty cast iron and stainless steel housing for years of dependable service
- Continuous duty Direct Drive motors reduce maintenance to simply keeping the intake screen clean
- Double silicone carbide mechanical seals and dual drive bearings reduce friction and wear, prolonging motor life
- Thermal overload protection shuts down pump in low water conditions, to prevent serious damage due to overheating


ITEM	73892	73893	73894	73895	87752	
MODEL	A-05	A-05 A-05L		A-31	AN-32	
DESCRIPTION	A-Series - 1/2 HP	A-Series - 1/2 HP	A-Series - 1 HP	A-Series - 1 HP	A-Series - 2 HP / 230V	
MOTOR	1/2 HP	1/2 HP	1 HP	1 HP	2 HP	
VOLTS		11	230			
AMPS	5.4	6.4	9.8			
WATTS	645	725	1060	1160	2155	
OUTLET		2" FIPT		3" F	FIPT	
WEIGHT	32 lbs.	40 lbs.	43 lbs.	48 lbs.	92 lbs.	
CORD LENGTH						
DIMENSIONS	9"L x 61/4"W x 15"H	10"L x 7"	W x 17"H	11"L x 7"W x 18"H	15¾"L x 8¼"W x 23"H	
WARRANTY	2-year					

MODEL	MAX FLOW (GPH)	5'	10'	15' 	20'	25' 	30' 	35' 	40' 	45' 	50' 	55'	60'
A-05		3165	2840	2500	2155	1875	1455	935	320				
A-05L		5040	4320	3600	2820	1920	840						
A-21		5810	5325	4824	4335	3770	3140	2400	1530	540			
A-31		9300	8150	6830	5535	4120	25 35	625					
AN-32		14100	13320	12300	11100	10200	9180	7920	6600	5220	3900	2520	1320
Recommend	led Operating Rang	ge Best I	Efficiency Ra	ange	Do Not O	perate Rang	je						



- L-Series Direct Drive Axial pumps economically deliver very high volumes of water at low head through large diameter plumbing for wide waterfalls or where massive flows are required
- L-Series Direct Drive Axial pumps feature 3-inch male threaded outlets for ease in plumbing large diameter tubing
- Heavy-duty cast iron and stainless steel housing ensures years of dependable service
- Dual drive bearings and double silicone carbide mechanical seals reduce friction and wear, prolonging motor life
- Thermal overload protection shuts down pump in low water conditions, to prevent serious damage due to overheating

ITEM	73897	73898				
MODEL	L-305	L-310				
DESCRIPTION	L-Series - 1/2 HP	L-Series - 1 HP				
MOTOR	1/2 HP	1 HP				
VOLTS	11	5				
AMPS	8.0	10				
WATTS	710	1105				
OUTLET	3" N	ИРТ				
WEIGHT	60 lbs.	65 lbs.				
CORD LENGTH	31	0'				
DIMENSIONS	9"L x 9"W x 19¼"H					
WARRANTY	2-year					

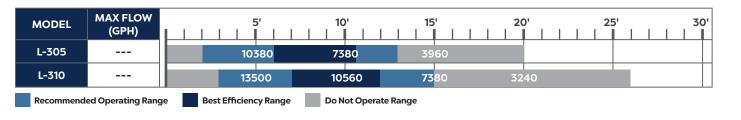



AQUAMAX SATELLITE FILTER



- Compatible with Oase AquaMax Eco Premium Pumps
- Use as a remote bottom drain for increased circulation and debris removal up to $\frac{3}{8}$ " from an additional area on the pond floor

ITEM	51074
DESCRIPTION	AquaMax Satellite Pre-Filter
DIMENSIONS	14½"L x 10¼"W x 4"H
FOR USE WITH	AquaMax Eco Premium Pumps
HOSE SIZE	1", 1¼", 1½"
WARRANTY	1-year

• Includes metric step fitting (1", 11/4", 11/2")

PUMPSHIELD®



- Extend the service life of your pump and ensure lasting high performance by keeping out large debris
- Simply drop the pump into the PumpShield and deploy

ITEM	45394
DESCRIPTION	PumpShield®
DIMENSIONS	15"L x 15"W
WARRANTY	1-year

• Durable construction for long service life

ECO CONTROL



- Innovative controller for smart regulation of Eco Expert Pumps
- Illuminated two-line display for easy read-out
- Displays power consumption, pump status and malfunctions, rotation speeds and total runtime

ITEM	72375
DESCRIPTION	Eco Control
CORD	33'
DIMENSIONS	3¾"L x 3½"W x 1½"H
FOR USE WITH	Aquarius Eco Expert & AquaMax Eco Expert Pumps
WARRANTY	1-year

- Allows remote operation of Seasonal Function Control (SFC) and Dynamic Function Control (DFC)
- Standalone controller needs no external power supply, but cannot be used if the pump is connected to an Oase Control (OC) System

VARIABLE SPEED CONTROLLER





Weatherproof output port locks pump cord in place

ITEM	73933		
MODEL	TWVSC		
DESCRIPTION	TidalWave Variable Speed Controller		
CORD LENGTH	6'		
FOR USE WITH	TT-Series Pumps up to 800 watts		
DIMENSIONS	6"H x 4"L x 2"W		
REQUIRES	Atlantic Control App		
WARRANTY	3-year		

- Variable Speed Controllers change the speed of rotation of the rotor of asynchronous pumps to vary both the flow and the wattage draw
- Atlantic's TidalWave VSC allows you to vary the output of TidalWave TT-Series Asynchronous pumps wirelessly
- VSC varies pump output from maximum down to 30% in 10 levels of adjustment using required Atlantic Control app
- Unlike built-in variable speed controlled pumps, where any failure of pump or controller renders both inoperable, our Variable Speed Controller operates separately from the pump
- Rugged weatherproof housing with covered plug nook allows mounting the box outdoors near your pump, while the cord lock eliminates inadvertent plug disconnection
- Indicator light turns blue when VSC is plugged into power and turns green when powering the pump
- In the event of power loss, the Variable Speed Controller will retain the last settings of flow level and programmed on/off times

ATLANTIC CONTROL APP

- Next generation Atlantic Control application turns any TT-Series asynchronous pump into a variable speed pump
- Customize name and password to effortlessly switch between multiple VSCs to wirelessly control multiple water features
- Program up to 3 different time periods in 24 hours, each with its own custom flow
- Simplify routine maintainence and feeding with customizable pause button which automatically resumes last flow level after a preset time
- App is available on Google Play Store and Apple App Store and is required for operation of the Variable Speed Controller









OASE ATLANTIC 10

INSTALLATION

Atlantic offers the best of everything you need to install your water features, without ever compromising quality. From innovative products designed with you in mind, like the award-winning Triton Check Valve that works with any pump, skimmer or pump vault, to fittings, foam, tubing and liner all proudly manufactured in the USA, our installation accessories will stand the test of time.

- >> Triton Check Valves custom fit every Atlantic application and adapt to all other manufacturers' equipment for the greatest versatility and convenience for the installer
- >> Atlantic high density FallsFoam available in gun cartridge and single use cans resists ultraviolet light and weathering for years of dependable service
- >> Compact, fully adjustable Automatic Fill Valves install easily to top water off automatically, saving time, trouble and pumps
- » American-made Kink-Free and flex PVC pipe sized for every application have greater flexibility for easier installation
- >> Choice of liner includes Carlisle Aquatough EPDM with J-Tear technology





TRITON CHECK VALVE



- Check Valves mount to the pump in the Skimmer to maintain water in biological filters and keep beneficial bacteria hydrated
- Atlantic's Triton TR215CV Check Valve is the first and only specifically designed for water feature use

ITEM	74222	
MODEL	TR215CV	
DESCRIPTION	Triton Check Valve	
VALVE DIMENSIONS	5%"L x 3½"W x 10"H	
INLET	1½" or 2" MIPT	
OUTLET	1½" or 2" socket	
WARRANTY	3-year	

- Included adapters accommodate multiple pump, skimmer, vault and plumbing options
- Single unions above and below the check valve speed removal of the valve and pump for servicing, maintenance and winterizing

TRITON CHECK VALVE FEATURES:

- 1. Full flow swing valve with inlet and outlet unions and a replaceable gasket.
- 2. Includes discharge fittings for 1½" and 2" PVC pipe and 1" 1½" tapered insert fitting for metric and ASTM standard tubing.
 - 3. Reversible discharge pipe works with all 1½" and 2" discharge TidalWave pumps and Atlantic equipment.



- 4. Molded "perfect-cut" dimensions to identify proper lengths for Atlantic product and cut-to-fit %" increments on the reverse side.
- 5. Discharge extension for use with taller Atlantic equipment.
- 6. Maximum assembled height of 23" from the pump discharge to the center of the outlet. Pipe can be extended to any length using 2" Sch 40 pipe and fittings.

AWGCV30



- Asymmetrical valve body fits vertical pumps with little lateral clearance
- Rubber coupling simplifies pump and valve removal for servicing, maintenance and winterizing

ITEM	74220		
MODEL	AWGCV30		
DESCRIPTION	3" Check Valve Assembly		
VALVE DIMENSIONS	11½"L x 5½"W x 13½"H		
INLET	3" socket		
OUTLET	3" rubber coupling		
WARRANTY	3-year		

- Can be extended to any height using 3" Sch 40 pipe and fittings
- · Full flow flap design reduces friction losses and increases flow





FALLSFOAM









74203



- FallsFoam fills voids and keeps water flowing on top of waterfall rocks instead of under them
- Atlantic's high density closed cell FallsFoam resists foot traffic and waterlogging
- Black for lower visibility, FallsFoam resists UV deterioration and lasts for years
- Foam Cleaner quickly dissolves uncured foam to keep guns and surroundings clean

ITEM	74198	74199	74203	
MODEL	LF1100	LF1300	LF1325	
DESCRIPTION	DIY Black Waterfall Foam Can w/ applicator straw	Professional Black Waterfall Gun Foam	Foam Gun Cleaner Can w/ optional spray nozzle	
FOR USE WITH		Foam	Guns	
SIZE	12 oz.	24 oz.	12 oz.	
WARRANTY / SHELF LIFE	1 year from E	1-year		

FALLSFOAM GUNS



74201

- Foam Guns feature a 7" barrel length for hard to reach areas
- Durable solvent resistant construction



74200

- Adjustable nozzle to control bead width
- Professional Foam Gun features non-stick coated barrel

ITEM	74201	74200	
MODEL	НТ330	НТ770	
DESCRIPTION	Economy Foam Gun	Professional Foam Gun	
FOR USE WITH	24 oz. cans		
WARRANTY	1-year		

AUTO FILL



ITEM	74246
MODEL	AF1000
DESCRIPTION	½" MIPT Auto Fill Kit
WARRANTY	1-year

- Automatic fill valves maintain a consistent water level in basins and reservoirs
- Atlantic's AF1000 Automatic Fill Valve works with all Atlantic Skimmers, Pump Vaults, Formal Spillway and Fountain Basins
- Includes fittings to connect to a water supply using standard garden hose, ½" irrigation line and ½" Sch 40 PVC
- Supplies 1.5 gallons per minute at up to 80 psi (60 psi or less is recommended)

RTV SILICONE SEALANT



ITEM	74247	74248	
MODEL	SN2800	SN10300	
DESCRIPTION	Black RTV Silicone Tube	Black RTV Silicone Cartridge	
SIZE	2.8 oz. 10.3 oz.		
SHELF LIFE	2 years from Born on Date		

- Black RTV Silicone Sealant is used to create a watertight seal where liner is attached to filtration components
- RTV Silicone used in conjunction with Atlantic's molded inserts, liner retention flanges and stainless steel hardware ensures a watertight connection every time
- Atlantic's Room Temperature Vulcanization formula cures quickly for a permanent flexible seal
- Available in both small tube and gun cartridge sizes

SPECIALTY FITTINGS



- Atlantic's polypropylene bulkhead fittings install in flexible and rigid reservoir walls to create secure plumbing connections with standard Schedule 40 PVC fittings
- Reverse threaded bulkhead fittings tighten as standard fittings are screwed into them
- Cord Seal Fitting with expanding rubber core fits inside 11/2" socket fittings to create a leak-proof seal around 1/8" 1/8" cords
- Cord Seal Fitting is used to pass pump and lighting cords in underwater bulkhead or conduit connections through reservoir walls
- 1½" Universal Union with multiple outlet options is perfect for almost all Fountain and Formal Spillway applications

ITEM	74223	74224	74225	74205	93453
MODEL	HA1550 HA2000		HA3000	CSEAL15	4SU-015-010G
DESCRIPTION	Bulkhead (1½" FIPT x Bulkhead (2" FIPT x 2" 1½" FIPT) FIPT)		Bulkhead (3" FIPT x 3" FIPT)	Cord Seal Fitting	1½" Universal Union (soc x soc / MPT)
DIMENSIONS	4½"W x 2¾"H		5½"W x 2½"H	11%"W x 13%"H	4"L x 3½"W x 3½"H
HOLE SIZE	3"		4½"	1½" Sch 40 socket fitting	
INCLUDES				1½" male thread adapter	1½" soc / 1½" MPT / 1" soc outlet fittings

112



FLEXIBLE PVC PIPE





Atlantic's top quality, American made Schedule 40 PVC pipe is heavy-walled, extremely flexible and incredibly durable. Decrease labor and maximize pump flow with Flexible PVC Pipe.

ITEM	90158	93839	75251	75252	75253	75254	75255	75250
MODEL	FH125	FH150	FH1525	FH1550	FH225	FH250	FH350	KF.75100
DESCRIPTION	1" x 25' PVC Black Flex Pipe	1" x 50' PVC Black Flex Pipe	1½" x 25' PVC Black Flex Pipe	1½" x 50' PVC Black Flex Pipe	2" x 25' PVC Black Flex Pipe	2" x 50' PVC Black Flex Pipe	3" x 50' PVC Black Flex Pipe	34" x 100' PVC Kink-Free Tubing
WEIGHT	8 lbs.	16 lbs.	13 lbs.	26 lbs.	18 lbs.	36 lbs.	70 lbs.	11 lbs.
WARRANTY	5-year							

METRIC KINK-FREE TUBING





UV resistant Oase Metric Kink-Free Tubing accommodates Oase fittings and outlets and can withstand up to $45~\mathrm{psi}$.

ITEM	45402	45399	45398	45400
DESCRIPTION	³¼" x 20' Kink-Free Tubing	1" x 20' Kink-Free Tubing	1½" x 20' Kink-Free Tubing	2" x 100' Kink-Free Tubing
WARRANTY	1-year			

OASE VINYL TUBING





Oase Metric Vinyl Tubing handles up to 45 psi and accommodates ½" ID fittings and outlets.

ITEM	45405	
DESCRIPTION	½" x 20' Vinyl Tubing	
WARRANTY	1-year	

TRADUX



- Oase Tradux is a bulkhead fitting assembly with accessories to pass tubing or cables through a reservoir wall
- Passes tubing or cords underwater through pond liner or pre-formed pond walls with included cord seal fitting

ITEM	42750		
DESCRIPTION	Tradux Bulkhead Fitting		
HOSE SIZE	3/4", 1", 11/4", 11/2", 2"		
INCLUDES	(2) metric step fittings (¾", 1", 1¼", 1½", 2"), bulkhead fitting and cord seal fitting		
WARRANTY	2-year		


- Underwater connections keep water features aesthetically seamless and organic
- Easy installation with just a screwdriver

FLOW REGULATOR



ITEM	51260	
DESCRIPTION	Flow Regulator	
OUTLET	1" - 1½"	
HOSE SIZE	1", 1¼", 1½"	
INCLUDES	Valve body, 2 metric step fittings (1", 1¼", 1½")	
WARRANTY	1-year	

- Oase Flow Regulator controls water flow to filters and water features
- Use as a tubing connector for connecting kink-free tubing

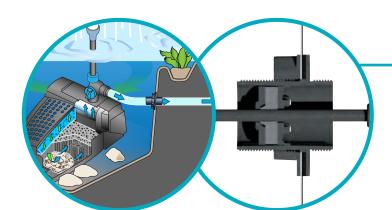

DID YOU KNOW?

The Tradux fitting can be used either to pass tubing through the liner of a pond or water feature or, with the included cord seal fitting to pass electrical cords, such as those of pumps or lights, through the liner.

ATLANTIC-OASE



UNDERLAYMENT





- Non-woven polypropylene fabric underlayment is puncture and abrasion resistant while still allowing air and water to pass
- Use Atlantic's premium 6 oz. underlayment above and below liner to protect against cuts, roots and abrasion

ITEM	74147	74148	74146
MODEL	PU1212	PU1225	PU12100
DESCRIPTION	Pond Underlayr	ment (single bag)	Pond Underlayment (full roll w/ 6' core)
SIZE	12' x 12'	12' x 25'	12' x 100'

EPDM PRIMER & SEAM TAPE





- Seam tapes and liner primer work together to create permanent bonds between two separate liners
- Seam tape has a sticky unvulcanized rubber side that bonds to cleaned liner prepared with Primer to create watertight seams and repairs of inadvertent rips and tears

ITEM	74184	74185	74197	74195
MODEL	LI SEAMTAPE3	LI SEAMTAPE6	LI PRIMERQT-L	LI PRIMERGAL-L
DESCRIPTION	Double-Sided Seam Tape	Single-Sided Cover Tape	Low VOC Multi-Purpose Primer	Low VOC Multi-Purpose Primer
SIZE	3" x 100'	6" x 100'	1 quart	1 gallon

EPDM LINER REPAIR KIT



•	Liner repair kits contain everything needed to create watertight
	seams and repair inadvertent rips and tears.

ITEM	74183	
MODEL	LI REPAIRKIT-SM	
DESCRIPTION	Small Liner Repair Kit	
INCLUDES	2 oz. of Multi-Purpose Primer, (2) 6" x 6" Peel & Stick Patches, Patch Roller, Scrubber Pad & gloves	

 Atlantic Small Liner Repair Kit is a convenient way to ensure you have everything on hand to make small repairs and seams instantly

CARLISLE EPDM BOXED LINER & LINER ROLLS



- Carlisle AquaTough 45mil EPDM liners are safe for use in water gardens, koi ponds, natural swim ponds and recreational ponds
- Only Carlisle AquaTough liner includes a light surface dusting of the liner to improve handling and to reduce friction during panel install
- Exclusive J-Tear technology that turns tears on themselves to reduce the chance of ripping in the field
- Available in boxed for convenience or in rolls for larger projects



ITEM	MODEL	SIZE	BOX DIMENSIONS / CORE SIZE	WEIGHT	WARRANTY
74193	LI810-B	8' x 10' Boxed Liner	12" x 12" x 13"	27 lbs.	Limited Lifetime
74186	LI1010-B	10' x 10' Boxed Liner	12" x 12" x 13"	33 lbs.	Limited Lifetime
74187	LI1015-B	10' x 15' Boxed Liner	12" x 12" x 13"	48 lbs.	Limited Lifetime
74188	LI1515-B	15' x 15' Boxed Liner	12" x 24" x 13"	71 lbs.	Limited Lifetime
74189	LI1520-B	15' x 20' Boxed Liner	12" x 24" x 13"	94 lbs.	Limited Lifetime
74190	LI1525-B	15' x 25' Boxed Liner	12" x 36" x 13"	117 lbs.	Limited Lifetime
74191	LI2020-B	20' x 20' Boxed Liner	12" x 36" x 13"	119 lbs.	Limited Lifetime
74192	LI2025-B	20' x 25' Boxed Liner	12" x 36" x 13"	150 lbs.	Limited Lifetime
74151	LI R1050	10' x 50' EPDM Liner	6" Diameter - 6.5' Long	145 lbs.	Limited Lifetime
74154	LI R1550	15' x 50' EPDM Liner	6" Diameter - 6.5' Long	218 lbs.	Limited Lifetime
74159	LI R2050	20' x 50' EPDM Liner	6" Diameter - 6.5' Long	290 lbs.	Limited Lifetime
74164	LI R2550	25' x 50' EPDM Liner	6" Diameter - 6.5' Long	365 lbs.	Limited Lifetime
74168	LI R3050	30' x 50' EPDM Liner	6" Diameter - 6.5' Long	435 lbs.	Limited Lifetime
74171	LI R3550*	35' x 50' EPDM Liner	6" Diameter - 11' Long	508 lbs.	Limited Lifetime
77089	LI R4050*	40' x 50' EPDM Liner	6" Diameter - 11' Long	580 lbs.	Limited Lifetime
76033	LI R5050*	50' x 50' EPDM Liner	6" Diameter - 13.5' Long	725 lbs.	Limited Lifetime
74181	LI R5100	5' x 100' EPDM Liner	6" Diameter - 6.5' Long	145 lbs.	Limited Lifetime
74149	LI R10100	10' x 100' EPDM Liner	6" Diameter - 6.5' Long	290 lbs.	Limited Lifetime
74152	LI R15100	15' x 100' EPDM Liner	6" Diameter - 6.5' Long	435 lbs.	Limited Lifetime
74155	LI R20100	20' x 100' EPDM Liner	6" Diameter - 6.5' Long	580 lbs.	Limited Lifetime
74160	LI R25100	25' x 100' EPDM Liner	6" Diameter - 6.5' Long	725 lbs.	Limited Lifetime
74165	LI R30100	30' x 100' EPDM Liner	6" Diameter - 6.5' Long	870 lbs.	Limited Lifetime
76030	LI R35100*	35' x 100' EPDM Liner	6" Diameter - 11' Long	1015 lbs.	Limited Lifetime
76031	LI R40100*	40' x 100' EPDM Liner	6" Diameter - 11' Long	1160 lbs.	Limited Lifetime
77090	LI R45100*	45' x 100' EPDM Liner	6" Diameter - 13.5' Long	1320 lbs.	Limited Lifetime
76032	LI R50100*	50' x 100' EPDM Liner	6" Diameter - 13.5' Long	1450 lbs.	Limited Lifetime
74150	LI R10200*	10' x 200' EPDM Liner	6" Diameter - 13.5' Long	580 lbs.	Limited Lifetime
74153	LI R15200*	15' x 200' EPDM Liner	6" Diameter - 13.5' Long	870 lbs.	Limited Lifetime
74156	LI R20200*	20' x 200' EPDM Liner	6" Diameter - 13.5' Long	1160 lbs.	Limited Lifetime
74161	LI R25200*	25' x 200' EPDM Liner	6" Diameter - 13.5' Long	1440 lbs.	Limited Lifetime
74166	LI R30200*	30' x 200' EPDM Liner	6" Diameter - 13.5' Long	1730 lbs.	Limited Lifetime
74170	LI R35200*	35' x 200' EPDM Liner	6" Diameter - 13.5' Long	2000 lbs.	Limited Lifetime
74173	LI R40200*	40' x 200' EPDM Liner	6" Diameter - 13.5' Long	2280 lbs.	Limited Lifetime
74179	LI R50200*	50' x 200' EPDM Liner	6" Diameter - 13.5' Long	2850 lbs.	Limited Lifetime

Please note: All Liner is subject to availability

*Must be purchased on a full truckload, items are not stocked

ATLANTIC-OASE ATLANTIC-OASE

LIGHTING

Atlantic-Oase's innovative LED Lighting Systems feature the latest technology, fixtures, more color options and mobile applications to put complete control at your fingertips. Choose from a multitude of submersible and external fixtures, Warm White or Color Changing options.

- » Lighting products feature the highest quality light emitting diodes
- » Atlantic solid brass bodies dissipate heat, resist corrosion and provide long lasting, dependable service
- >> Silicone gaskets and precision lenses guarantee weatherproof and waterproof performance
- >> InfiColor Smart Module handles 80 watts, controls 3 independent illumination zones and is fully programmable via mobile application, controlling colors, timing, sequences, brightness and transitions
- >> Oase ProfiLux RGB lights connect to the Oase Control System for individual cloud-based control from anywhere on the planet







ATLANTIC WARM WHITE LIGHTING SYSTEM

- Multiple fixtures cover a range of lighting options, in and out of the water $% \left(1\right) =\left(1\right) \left(1\right) \left($
- Color temperature of 2800°K matches most legacy lighting including halogen
- Replaceable diodes ensure long service life
- $\bullet\,$ Solid brass fixture construction resists corrosion and damage
- Standard flat 2-wire low voltage wiring easily integrates into exisiting systems



ATLANTIC COLOR CHANGING LIGHTING SYSTEM

- Multiple fixtures cover a range of lighting options, in and out of the water
- Replaceable diodes ensure long service life
- Solid brass fixture construction resists corrosion and damage
- InfiColor Smart Module wirelessly controls lights via Atlantic Control app
- Mix and match up to 80 watts over 3 independent zones



OASE PROFILUX RGB LIGHTING SYSTEM

- Highest quality German made components
- Oase Control System and App control each light individually
- Control lights via local Module over WiFi or connect to home router for Cloud control
- 24 volt system connects up to 4 lights at a time to underwater transformer
- Set lights up to 13' deep on adjustable base with nozzle mounting attachment







- LED Spotlights create focal points in and around the water feature
- Atlantic's compact solid brass Spotlights with oil rubbed bronze finish blend into any landscape or water feature
- Small remote drivers 18" from light decrease heat and pull through 1" sweeps
- Submersible lights function equally well out of water and throughout the landscape
- LED units inside lights are easily replaceable
- Spotlights feature quick-connect plug for easy installation
- Flat 2-wire cord can be cut, stripped and tied into existing systems
- InfiColor Smart Module (sold separately) and Atlantic Control App (required) unlock the full potential of Color Changing Lights



ITEM	74106	74096	74107	74097
MODEL	WWCS2	CCCS2	WWCS4	CCCS4
DESCRIPTION	Warm White Compact Spotlight - 2 watt	Color Changing Compact Spotlight - 2 watt	Warm White Compact Spotlight - 4 watt	Color Changing Compact Spotlight - 4 watt
INPUT	12 volt AC	InfiColor	12 volt AC	InfiColor
WATTS	:	2		4
BEAM ANGLE	45 Degrees			
LUMENS	100	Variable	300	Variable
COLOR TEMPERATURE	2800K		2800K	
DIMENSIONS	2½"L x 1½"W 2½"L x 1¾"W		(1¾"W	
CORD LENGTH		21	0'	
INCLUDES	Base & ground stake			
REQUIRES	WW30X4 or 12 volt Transformer	InfiColor Smart Module, 12 volt Transformer & Atlantic Control App	WW30X4 or 12 volt Transformer	InfiColor Smart Module, 12 volt Transformer & Atlantic Control App
WARRANTY	5-year Limited			

DID YOU KNOW?

Atlantic has made major improvements to Color Changing lighting, redesigning plugs with large and small solid steel pins to eliminate any chance of misalignment, lengthening the driver housing to better dissipate heat and eliminate any chance of shorting between power leads.





 Atlantic Hardscape Lights of solid brass and stainless steel feature a classic oil rubbed bronze finish to enhance any hardscape

• Hardscape Lights brighten walls, columns or steps evenly, without hot spots

- Hardscape Lights install under steps, caps and counters
- Cast brass epoxied diode assembly can be replaced without removing mounting plate
- Isolated drivers decrease size of fixture and optimize heat dissipation
- Hardscape Lights feature quick-connect plug for easy installation
- Flat 2-wire cord can be cut, stripped and tied into existing systems
- InfiColor Smart Module (sold separately) and Atlantic Control App (required) unlock the full potential of Color Changing Lights

ITEM	74141	74129	
MODEL	WWHL6	CCHL6	
DESCRIPTION	6" Warm White Hardscape Light	6" Color Changing Hardscape Light	
INPUT	12 volt AC	InfiColor	
WATTS		2	
BEAM ANGLE	120 De	egrees	
LUMENS	20	Variable	
COLOR TEMPERATURE	2800K		
DIMENSIONS	6"L x %"W x %"H		
CORD LENGTH	2	0'	
INCLUDES	Mounting Plate		
REQUIRES	WW30X4 or 12 volt Transformer	InfiColor Smart Module, 12 volt Transformer & Atlantic Control App	
WARRANTY	5-year Limited		



TECH TIP

Unlike many built-in fixtures, Atlantic's Hardscape Lights feature a removable LED diode assembly. The assembly attaches with two stainless steel screws, eliminating the need to remove the steel anchor plate to replace the light. Simply loosen the screws and unplug the assembly to remove the old light bar and replace with the new one. Use dielectric silicone grease on the plug to maintain water resistance.

ATLANTIC





- Low profile Ring Light uplights and washes with an extremely wide 120° beam angle
- Atlantic's solid brass Ring Lights feature a classic oil rubbed bronze finish that complements any landscape or water feature
- Epoxy-encased, cast brass light fits over 1½" pipe and includes bushing for 1" applications
- Ring Lights feature quick-connect plug for easy installation
- Flat 2-wire cord can be cut, stripped and tied into existing systems
- InfiColor Smart Module (sold separately) and Atlantic Control App (required) unlock the full potential of Color Changing Lights



74137

74127

- Fountain lights illuminate water inside vases, basalts and bubbling boulders
- Atlantic's epoxy-encased Fountain Lights flood plumes of water with 120° beam angle
- PVC body with bottom mounted cord fits into 11/2" socket fittings and 2" bore holes
- Fountain Light accepts standard 3/4" rigid PVC or Kink-free tubing
- Fountain Lights feature quick-connect plug for easy installation
- Flat 2-wire cord can be cut, stripped and tied into existing systems
- InfiColor Smart Module (sold separately) and Atlantic Control App (required) unlock the full potential of Color Changing Lights

ITEM	74143	74132	74137	74127
MODEL	WWRL5	CCRL5	WWFL2	CCFL2
DESCRIPTION	Warm White Ring Light	Color Changing Ring Light	Warm White Fountain Light	Color Changing Fountain Light
INPUT	12 volt AC	InfiColor	12 volt AC	InfiColor
WATTS	į	5		2
BEAM ANGLE	120 Degrees			
LUMENS	500	Variable	150	Variable
COLOR TEMPERATURE	2800K		2800K	
DIMENSIONS	3¾"OD x 2"ID x %"H		2"W x 13%"H	
CORD LENGTH		2	0'	
INCLUDES	1" Bu	shing	³¼" inse	rt fitting
REQUIRES	WW30X4 or 12 volt Transformer	InfiColor Smart Module, 12 volt Transformer & Atlantic Control App	WW30X4 or 12 volt Transformer	InfiColor Smart Module, 12 volt Transformer & Atlantic Control App
WARRANTY	5-year Limited			



- Spout Lights illuminate water flowing from Wall Spouts and bubbling boulders
- Atlantic's Spout Light with 1" MIPT machined brass body mounts inside Sch 40 PVC FIPT fittings to light the stream of water from inside plumbing
- Small diameter drivers are isolated 18" from light for optimal heat dissipation and fit through 1" conduit
- LED units inside lights are easily replaceable
- Spout Lights feature quick-connect plug for easy installation
- Flat 2-wire cord can be cut, stripped and tied into existing systems
- InfiColor Smart Module (sold separately) and Atlantic Control App (required) unlock the full potential of Color Changing Lights



74136 74126

- Linear lights are designed to wash walls, falls and spillways with a wide 120° beam angle
- Atlantic's solid brass Bar Light includes dual bases and stainless steel L-brackets to mount to any hard surface
- Mounted light rotates 30° in either direction for versatility in directing illumination
- Bar Lights feature quick-connect plug for easy installation
- Flat 2-wire cord can be cut, stripped and tied into existing systems
- InfiColor Smart Module (sold separately) and Atlantic Control App (required) unlock the full potential of Color Changing Lights

ITEM	74145	74134	74136	74126
MODEL	WWSL2	CCSL2	WWBL5	CCBL5
DESCRIPTION	Warm White Spout Light	Color Changing Spout Light	Warm White Bar Light	Color Changing Bar Light
INPUT	12 volt AC	InfiColor	12 volt AC	InfiColor
WATTS	2	2	į	5
BEAM ANGLE	45 Degrees		120 De	egrees
LUMENS	100	Variable	500	Variable
COLOR TEMPERATURE	2800K		2800K	
DIMENSIONS	1½"L x 1½"W x 1%"H		11½"L x 5%	"W x ½"H
CORD LENGTH		20	0'	
INCLUDES			(2) Bases,	L-brackets
REQUIRES	WW30X4 or 12 volt Trans- former	InfiColor Smart Module, 12 volt Transformer & Atlantic Control App	WW30X4 or 12 volt Trans- former	InfiColor Smart Module, 12 volt Transformer & Atlantic Control App
WARRANTY	5-year Limited			

ATIANTIC 123





- · Submersible pond lights extend enjoyment of ponds and water features beyond dusk
- · Atlantic's Pond Light Kits come complete with everything needed to illuminate waterscapes and the surrounding landscape
- Durable high-impact housing and replaceable diode assembly for long service life
- Triple Light Kits includes 12' cord from transformer to junction plus 8' to
- Warm White Pond Lights feature removable photocell light sensor with
- Light sensor turns lights on at dusk, off after 6 hours, even if photocell gets covered
- · Color Changing Pond Lights include single-zone InfiColor Smart Module to unlock the full potential of Color Changing Lights with Atlantic Control App

ITEM	74102	74095			
MODEL	SOLWPL3	CCPL3			
DESCRIPTION	Warm White Triple Pond Light Kit	Color Changing Triple Pond Light Kit			
INPUT	12 volt AC	InfiColor			
WATTS		6			
BEAM ANGLE	30 De	30 Degrees			
LUMENS	120	Variable			
COLOR TEMPERATURE	2800K				
DIMENSIONS	(3) 2½"L x 2"W				
CORD LENGTH	12' cord from transformer t	o junction + 8' to each light			
INCLUDES	Light bases, removable photocell & 12 volt outdoor transformer	Light bases, InfiColor Single Zone Smart Module & 12 volt outdoor transformer			
REQUIRES	Atlantic Control App				
WARRANTY	1-year				

DID YOU KNOW?

Pond Light Kits come with everything needed to set up automatic operation. Warm White Sets include photocells with light sensors that turn on at dusk and off after 6 hours of operation. Photocells are designed with a built-in memory that records the last 24 hours and repeats that schedule indefinitely if the photocell gets covered by debris or overgrown plantings.





ITEM	74123	74112	
MODEL	WWBSX4	CCBSX4	
DESCRIPTION	Warm White 4-outlet Block Splitter	Color Changing 4-outlet Block Splitter	
INPUT	12 volt AC	InfiColor	
DIMENSIONS	5"L x 1½"W x 1½"H w/ 4" cord		
INCLUDES	Weatherproof caps		
WARRANTY	5 year		

- mount on flat surfaces to neaten and organize wiring
- All Splitters feature removable weatherproof caps for unused outlets and include dielectric grease
- Atlantic quick-connect wiring makes connecting multiple fixtures Warm White Splitter can be stripped and spliced into existing low voltage systems
- Compact inline 4-outlet Block Splitters simplify connections and Color Changing Splitters feature one-way keyed connections to eliminate misalignment and water intrusion




ITEM	74124	74113	
MODEL	WWEXT20	CCEXT20	
DESCRIPTION	Warm White Extension Cord	Color Changing Extension Cord	
INPUT	12 volt AC	InfiColor	
CORD	20'		
INCLUDES	Weatherproof caps		
WARRANTY	5 year		

- Extension cords allow remote placement of lights where needed most in the landscape, waterscape and hardscape
- Atlantic's extensions feature silicone gaskets and dielectric grease for secure waterproof connections
- Warm White extension cord can be stripped and spliced into existing low voltage systems
- Color Changing Extension Cords feature one-way keyed connections to eliminate misalignment and water intrusion



ITEM	77031	74111	74110
MODEL	TRANS60	TRANS88	TRANS150
DESCRIPTION	60 Watt Transformer	88 Watt Transformer	150 Watt Transformer
INPUT	120 volt AC		
OUTPUT	12 volt AC		
WARRANTY	1 year		

- to Atlantic LED Lighting Systems and are fully weatherproof for worry-free outdoor installations
- TRANS60 connects to 2-pin Warm White quick-connect plugs
- Solid state transformers provide dependable low voltage AC current TRANS88 and TRANS150 feature built-in photocell with light sensor and timer to turn on at dusk and off at dawn or after 4, 6 or 8 hours of operation
 - Connect wiring directly to TRANS88 and TRANS150

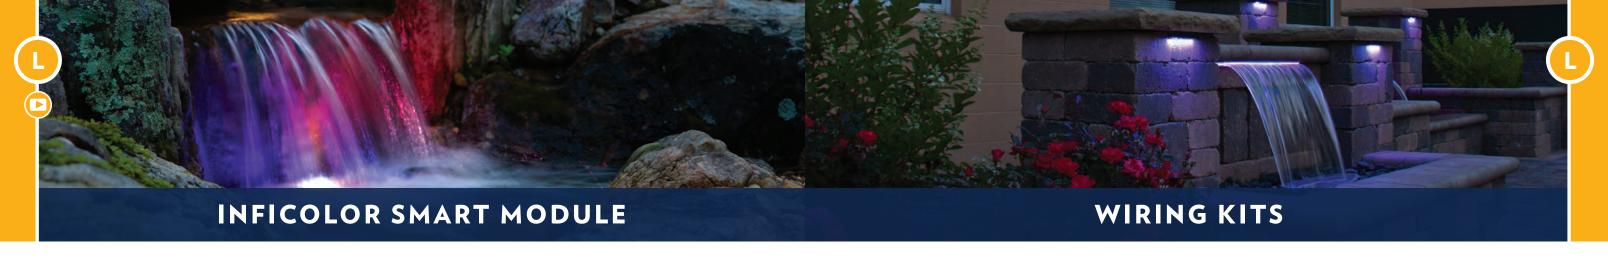

The InfiColor Smart Module and Atlantic Control mobile application at the heart of the Color Changing Lighting System allow users to program custom color sequences and transitions, set sequence timing and daily scheduling and unlock all RGB options on any Apple or Android mobile device. The InfiColor Smart Module controls three individual zones wirelessly in the Atlantic Control app.



ITEM	97740
MODEL	CCSM30X3
DESCRIPTION	InfiColor Smart Module
INPUT	120 volt AC
OUTPUT	InfiColor
REQUIRES	Atlantic Control App
WARRANTY	1 year

- InfiColor Smart Module and Atlantic Control App unlock the full potential of Color Changing Lights
- Smart Module is wirelessly controlled via Atlantic Control App, no A total of 80 watts of lighting can be controlled per InfiColor remote necessary
- The three outlets of the InfiColor Smart Module can be synced and linked as a single zone or three zones may be controlled individually
- Each outlet can control up to 30 watts of Color Changing Lighting with additional splitters
- Smart Module
- Module includes removable weatherproof caps for unused outlets and dielectric grease

ATLANTIC CONTROL APP

The Atlantic Control App makes custom colors, sequences, transitions, timing and daily scheduling of your Atlantic Color Changing Lighting or Color Changing Colorfalls accessible on any Apple or Android mobile device, no remote necessary.







- Select any or all of the three zones to control
- Choose any color visually or create a custom color with RGB sliders
- Combine and save custom color sequences as Favorites
- Assign one of five transitions and adjust the speed of any Favorite
- · Adjust brightness of sequences and solid colors as desired
- The three zones can be independently named and scheduled
- Atlantic Control App is available on all Apple or Android devices





INFICOLOR WIRING KIT



ITEM	74125	
MODEL	CC30X3	
DESCRIPTION	InfiColor 3 Light Wiring Kit	
INPUT	120 volt AC	
OUTPUT	InfiColor	
INCLUDES	InfiColor Smart Module & 30 Watt Transformer	
WARRANTY	1 year	

- InfiColor Wiring Kit powers and connects up to three Color Changing Lights
- Color Changing Lights can be synced and linked as a single zone or three zones may be controlled individually
- Module includes removable weatherproof caps for unused outlets and dielectric grease
- 30 watt solid state Transformer is fully weatherproof for worry-free outdoor installations
- Add additional splitters to control up to 30 watts of Color Changing lighting

WARM WHITE WIRING KIT




ITEM	74122
MODEL	WW30X4
DESCRIPTION	Warm White 4 Light Wiring Kit
INPUT	120 volt AC
OUTPUT	12 volt AC
INCLUDES	30 Watt Transformer & 4-outlet Block Splitter
WARRANTY	1 year

- Warm White Wiring Kit powers and connects up to four Warm White Lights
- Compact inline 4-outlet Block Splitter simplifies connections and mounts on flat surfaces to neaten and organize wiring
- 30 watt solid state Transformer is fully weatherproof for worry-free outdoor installations
- Add additional Splitters (not included) to power up to 30 watts of Warm White Lighting





MET



- Oase ProfiLux Garden LED RGB produces the full spectrum of LED light in conjuction with the Garden Cloud Controller unit
- Adjustable head with innovative integrated clamping system for flexible positioning in a variety of applications including onto OASE 1" Nozzle Extension (page 38, not included)
- Energy efficient LED with stainless steel adjustment screws and reflector
- Suitable for use in and out of the water to a water depth of 13'
- ProfiLux Garden LED Controller connects up to 4 spotlights; multiple ProfiLux Controllers may be connected to the Oase Control System

ITEM	72376	72377	
DESCRIPTION	ProfiLux Garden LED RGB Set 3	ProfiLux Garden LED RGB	
INPUT	24 volt DC		
WATTS	19 6		
BEAM ANGLE	25 degrees		
LUMENS	213 (Red - 64 / Green - 114 / Blue - 35)		
DIMENSIONS	3"W x 4½"H		
CORD LENGTH	16'		
REQUIRES	Garden Cloud Controller (#72380)	ProfiLux Garden LED Controller (#72378) & Garden Cloud Controller (#72380)	
INCLUDES	3 spotlights with 16' power cord, 24 volt underwater ProfiLux Garden LED controller, 3 bases and 3 ground stakes	1 spotlight with 16' power cable, base and ground stake	
WARRANTY	2-year + 1		

OASE CONTROL



Connect your ProfiLux Lights to the Oase Control System (OC) to fully control each light, up to 40 lights*, from anywhere in the world on any Android or Apple device with Oase Control mobile application. See page 130 for more information on the Garden Cloud Controller.

Oase Control can display and control a variety of functions including:

- 9 preset color choices
- Color wheel for infinite color choices
- Brightness control
- Access 11 pre-programmed light shows
- · Light show speed control
- All lights can be individually controlled



*Each ProfiLux Garden LED Controller is one device within the OC System

PROFILUX GARDEN LED CABLE



ITEM	72379
DESCRIPTION	24' ProfiLux Garden LED Cable
CORD LENGTH	24' / 7.5m
WARRANTY	2-year

• Extends the distance between ProfiLux Garden LED RGB Spotlights and LED Controller 24 feet

• Only one extension cable can be used per light, suitable for use in and out of the water

72378

PROFILUX GARDEN LED CONTROLLER

ITEM





- DESCRIPTION ProfiLux Garden LED Controller **CORD LENGTH** 16' DIMENSIONS 8½"L x 4½"W x 2¾"H WARRANTY 2-year + 1
- Controller rated for underwater use is required for operation of ProfiLux Garden LED lights • Connect to Garden Cloud Controller (sold separately) for wireless
- Powers up to 4 ProfiLux Spotlights with 30 watts of 24V current and only counts as one device within the Oase Control System



control of Spotlights

DID YOU KNOW?

ProfiLux Lights include a mounting attachment for Fountain Heads or any other shaft, pipe or object up to 1" in diameter. This allows for unique lighting opportunities in the landscape and underwater.









- The Garden Cloud Controller operates and monitors Oase Control System devices via WiFi application, either locally or over the Internet
- OC-enabled filters, pumps and lights are directly linked to the Garden Cloud Controller with Connection Cables and controlled by the Oase Control App
- The free Oase Control App individually reads and regulates any combination of up to 10 OC pumps, filters or LED controllers on any Apple or Android platform
- For local control of the hardwired network within 260' of the Cloud Controller, the Oase Control App connects directly to the Controller via WiFi
- For world-wide control, link the Cloud Controller to a home router to enable the app to control the devices from anywhere on your mobile device

72380	
Garden Cloud Controller	
12 volt AC	
2	
6'	
5¼"W x 3½"D x 1½"H	
6' connection cable, End Resistor, OC Cable Connector and 110V outdoor transformer	
2-year + 1	

- Controller mounts conveniently on a wall or in the ground with included stake and mounting hardware
- The controller housing has an IP64 waterproof rating allowing for all-season outdoor use
- All compatible devices connect to each other by cables to in/out plugs on devices
- · All components are individually controlled regardless of their location in the chain of devices

	COMPATIBLE DEVICES		
FILTERS	ProfiClear Premium Compact-M Pump-fed (72374) ProfiClear Premium Compact-L Pump-fed (73379) ProfiClear Premium Compact-L Gravity-fed (89194) ProfiClear Premium XL Gravity-fed (95197) ProfiClear Premium XL Pump-fed (95198)		
LIGHTS	ProfiLux Garden LED RGB Set 3 (72376) ProfiLux Garden LED RGB (72377)		
PUMPS	AquaMax Eco Premium 2500 (87581) AquaMax Eco Premium 3500 (87582) AquaMax Eco Premium 4500 (87583) AquaMax Eco Premium 5500 (87584) AquaMax Eco Expert 6800 (57875) Aquamax Eco Expert 11500 (58963) AquaMax Eco Expert 5300 - 12V (88676) AquaMax Eco Expert 7700 - 12V (88677) Aquarius Eco Expert 7300 (57964) Aquarius Eco Expert 11500 (57978) Aquarius Eco Expert 5300 - 12V (88678)		



An End Resistor in the last device signals the end of the run to the Cloud Controller

All OC compatible devices feature In and Out ports to connect OC Connection Cables

OASE CONTROL SYSTEM

The Oase Control System has the ability to control the entire line of Oase Control Products -Aquariums and Water Feature products all within the same app.

OC compatible devices connect to each other directly with Connection Cables and Connectors,

Start the beginning of the run with the Garden Cloud Controller.

It does not matter what order the devices are connected. Each device is individually addressable and controllable with 2-way communication.



OASE CONTROL APP

Download Android or iOS "Oase Control" application and install to access Cloud Controller in one of two ways.

Select "Direct (Access Point)" on startup to connect to Cloud Controller's internal WiFi from anywhere within a 260' radius.

You may also connect the Cloud Controller directly to your home router for full cloud access. Once set up, you can access, monitor and control all enabled devices from anywhere in the world as long as you have an internet connection





ACCESSORIES



- Connection Cables are special cables for bi-directional communication between Oase Control devices
- Cable Connector with plug on one side and socket on the other allows watertight connect of 2 cables
- 4-wire shielded Cable and Connector plug-and-socket connections are completely waterproof for underwater use



ITEM	72381	72384	93534	72385
DESCRIPTION	Oase Control Connection Cable	Oase Control Connection Cable	Oase Control Connection Cable	Oase Control Cable Connector
CORD LENGTH	8' / 2.5m	32' / 10m	100' / 30m	
WARRANTY	2-year			



MAINTENANCE

Atlantic offers a full line of maintenance products that will keep your water feature healthy and beautiful for years to come. Triton lonizer and treatments keep your pond crystal clear. Pond & Garden Protectors prevent accumulation of leaves and debris when the weather is less favorable. Winter or summer, Typhoon Air Pumps keep water moving and fish healthy. Oase PondoVacs keep ponds and fountains sparkling clean without draining.

- >> The Triton Ionizer integrates seamlessly to the Triton Check Valve or directly to PVC or Kink-Free pipe for the easiest installation possible and the app provides control right from your smart device
- >> PondoVac pond vacuums remove settled debris and wastes from the bottom and sides of ponds and fountains
- >> Maintenance and treatment products offer a wide variety of solutions for all of your aquatic needs
- >> Aeration products keep ponds aerated and breathing well year-round in the most economical manner possible
- >> Pond & Garden Protectors, Pond Nets and tools make caring for ponds, water features and gardens faster and easier





TRITON IONIZER



- lonizers mineralize the water to keep water features clean and clear with minimal oversight
- Atlantic's TRION3 Ionizer integrates seamlessly with the TR215CV Check Valve
- Easily installed in any new or existing water feature, clears water without the use of harsh chemicals
- Electrodes are easily replaced without tools

74055	
TRION3	
Electric Water Clarifier	
12 volt AC	
2	
2" Sch 40 PVC	
4¾"L x 1¼"D x 3½"H	
Transformer, test strips and insert fittings	
3-year	

- Level of mineralization is controlled by the LED panel or wirelessly via Atlantic Control App
- Treats ponds up to 25,000 gallons, safe for fish and plants when used correctly
- Includes 1" to $1\frac{1}{2}$ " tapered insert fittings for connection to metric and ASTM standard tubing





- The Atlantic Control App allows you to adjust the level of ionization and turn the power on/off
- Conductivity alert will inform you if your water is not conductive enough for selected ionization level
- Effortlessly switch between multiple lonizers to control different water features with custom names and passwords for secure access
- App available on the Apple App Store and Google Play Store

IONIZER ACCESSORIES





74054

• Replacement anode for TRION2 and TRION3 lonizers

74057

• 50 Alkalinity/pH/Copper test strips in foil packets for long shelf life

ITEM	74054	74057	
MODEL	TRION2-RA	TRION-TS	
DESCRIPTION	Replacement Anode for TRION2 and TRION3 Ionizers	Alkalinity/pH/Copper Test Strips	
SHELF LIFE		2-years from Born on Date	

133



- Pond vacuums remove debris from ponds, fountains, waterfalls, spas and pools without needing to drain the feature
- All PondoVacs include a wastewater discharge, a debris collection bag and a transparent suction tube to visually monitor debris intake
- Oase PondoVacs feature powerful suction, portability and a variety of attachments to handle any maintenance task

PONDOVAC CLASSIC



- Oase PondoVac Classic is perfect for cleaning small to medium sized water features, ponds and spas
- PondoVac Classic has a suction capacity of up to 800 gph
- Automatically empties tank when full through wastewater discharge hose
- Illuminated rocker switch signals power is on
- Compact design and built-in handle allow for easy movement and transportation

PONDOVAC 4



- Oase PondoVac 4 features continuous suction and waste discharge
- Two chamber system fills and empties alternating chambers for continuous suction and gravity discharge
- PondoVac 4 has a suction capacity of up to 1,300 gph
- Wheeled chassis with suction tube sockets to conveniently carry attachments
- Adjustable handle for fast and convenient transportion

PONDOVAC 5



- Oase PondoVac 5 features uninterrupted vacuuming with continuous waste discharge
- Two pump system simultaneously vacuums while integrated waste pump continuously empties tank
- PondoVac 5 has a suction capacity of up to 2,100 gph
- Wheeled chassis with 6" commercial wheels ensure stable movement through rough terrain
- Adjustable handle and suction tube sockets for fast and convenient transportation of attachments

ITEM	57347	50409	48080		
DESCRIPTION	PondoVac Classic	PondoVac 4	PondoVac 5		
WATTS	1400	1800	1800		
MAX FLOW	800 gph	1,300 gph	2,100 gph		
MAX SUCTION DEPTH	6'	8'	7'		
CORD LENGTH	13'	14'	25'		
DIMENSIONS	15"L x 15"W x 24"H	15%"L x 16¾"W x 26½"H	17¼"L x 16¾"W x 28¼"H		
SUCTION HOSE	13'	16'			
DISCHARGE HOSE	7'	8'	26'		
TANK VOLUME	7 gal	5½ gal	8¾ gal		
INCLUDES	3 suction tubes, 1 transparent suction tube, 4 tool attachments, debris collection bag	4 aluminum tubes, 1 transparent suction tube, 5 tool attachments, debris collection bag	4 aluminum tubes, 1 transparent suction tube, 5 tool attachments, debris collection bag, internal course debris collection bag		
WARRANTY	2-у	ear	2-year + 1		

PONDOVAC TOOL ATTACHMENTS									
	GRAVEL TOOL	LARGE GRAVEL TOOL	STRING ALGAE TOOL (BLACK)	STRING ALGAE TOOL (BLUE)	CREVICE TOOL	FLAT SURFACE BRUSH (BLACK)	FLAT SURFACE BRUSH (BLUE)	PREMIUM SURFACE BRUSH	SWIVEL BRUSH
PONDOVAC CLASSIC	•		•		•	•			
PONDOVAC 4		•		•			•	•	•
PONDOVAC 5		•		•			•	•	•



GRAVEL TOOLS

FLAT SURFACE BRUSHES



CREVICE TOOL





SWIVEL BRUSH



PREMIUM SURFACE BRUSH



DID YOU KNOW?

PondoVacs aren't just for ponds, these versatile vacuums are great for fountains, formal spillways and Pond-free fountains! Make spring openings a breeze and fall maintenance painless - put a PondoVac to work for you!



Atlantic's Typhoon Air Pumps feature weatherproof, continuous duty diaphragm compressors specifically designed for year-round usage. Ideal for aeration and circulation in warm weather, these aerators are also excellent for de-icing and gas exchange in freezing weather. With diffuser options for ponds from 1,000 to 12,000 gallons, Typhoon Air Pumps adapt to most backyard ponds. Best of all Typhoon Air Pumps are easily rebuildable and exceptionally efficient!

DIAPHRAGM AIR PUMPS



73941



- Maintain maximum O₂ levels in summer, gas diffusion in winter
- Easy to clean air filter reduces particulates for motor longevity
- Most cost efficient way to keep an area free of ice in winter
- Aluminum housing radiates and reduces heat to extend diaphragm life
- 73942

• Replaceable diaphragms for extended service life

• Includes 3/8" insert fitting for most vinyl air tubing or use stainless steel band clamp (not included) with ½" tubing over outlet

ITEM	73941	73942					
MODEL	TA1800	TA3600					
DESCRIPTION	Typhoon Air Pump - 30 LPM	Typhoon Air Pump - 60 LPM					
OUTLET	³‰" insert, ½" slip	%" insert, %" slip					
VOLTS	115						
WATTS	25	35					
MAX PRESSURE	3 psi	5 psi					
MAX DEPTH	7'	11'					
CORDS	6	5'					
DIMENSIONS	6¾"L x 5"W x 5¼"H	71/4"L x 7"W x 61/2"H					
WARRANTY	3-year Limited						

	AIR PUMP OUTPUT										
MODEL MAX @ 1' @ 2' @ 3' @ 4' @ 5' @ 6' @ 8'									@10'		
TA400	LPM / CFM	6.5 / 0.23	6 / 0.21	5.1 / 0.18	4 / 0.14	2.5 / 0.09	1 / 0.04				
TA800	LPM / CFM	13 / 0.46	12 / 0.42	10.2 / 0.36	8 / 0.28	5 / 0.18	2 / 0.07				
TA1800	LPM / CFM	30 / 1.06	25 / 0.88	21 / 0.74	17 / 0.60	13 / 0.46	9 / 0.32	4 / 0.14			
TA3600	LPM / CFM	60 / 2.12	54 / 1.91	47 / 1.66	40 / 1.41	34 / 1.2	28 / 0.99	23 / 0.81	12 / 0.42	2 / 0.07	

MINI AERATION KITS



- Dependable aeration for smaller ponds 5' deep or less
- Replaceable diaphragm cartridges extend pump service life



- Weighted air stones with rim guards stand up to multi-season use
- 73943 73944 MODEL TAKIT0400 **TAKIT0800 DESCRIPTION** Mini Aeration Kit - Single Mini Aeration Kit - Dual PUMP TA400 TA800 **TUBING SIZE** 1/4" x 20' (2) 1/4" x 20' WATTS 4.5 9 MAX DEPTH **CORD LENGTH** POND VOLUME 1,000 gallons 2,000 gallons DIMENSIONS 6½"L x 4"W x 3¾"H 61/2"L x 61/4"W x 33/4"H 4" air stone, in-line check valves and tubing **INCLUDES** (2) 4" air stones, in-line check valves and tubing 3-year Limited **WARRANTY**

PROFESSIONAL AERATION KITS



73939

- High output for larger water gardens and koi ponds with greater
- High efficiency non-clogging diffuser tubing is less restrictive than stones or rubber diaphragms for greater flows and longer pump life



73940

- Circular diffuser design maximizes upwelling and water circulation and gas exchange
- Diffusers come unweighted to reduce shipping costs and will require filling with your choice of sand or gravel

ITEM	73939	73940					
MODEL	TADKIT1800	TADKIT3600					
DESCRIPTION	Professional Aeration Kit - Single	Professional Aeration Kit - Dual					
PUMP	TA1800	TA3600					
TUBING SIZE	3%" x 20' weighted	3%" x 40' weighted					
WATTS	25	35					
MAX DEPTH	7'	11'					
CORD LENGTH		5'					
POND VOLUME	6,000 gallons	12,000 gallons					
DIMENSIONS	6¾"L x 5"W x 5¼"H	71/4"L x 7"W x 61/2"H					
INCLUDES	8" diffuser, fittings, in-line check valve and weighted tubing	(2) 8" diffusers, fittings, 2-way splitter, in-line check valves and weighted tubing					
WARRANTY	3-year Limited						

POND DE-ICER





ITEM	50041					
DESCRIPTIONS	AquaOxy 450					
VOLTS	120					
WATTS	25					
MAX DEPTH	7'					
MAX LPM	8.3					
CORD LENGTH	15'					
POND VOLUME	5,000 gal					
DIMENSIONS	9"L x 9"W x 5"H					
TUBING SIZE	(2) 3/ ₆ " x 16'					
INCLUDES	(2) air stones, 16' silicone air hose, 120V outdoor transformer					
WARRANTY	2-year					

- · Aeration systems maintain high oxygen levels in summer and aid in gas diffusion in winter
- Oase AquaOxy 450 is a safe 12V air compressor with dual valved outlets for versatile, energy efficient air delivery to dual locations in pond
- All-in-one aeration system includes silicone tubing and 2 weighted, high volume air stones
- Durable, weatherproof UV stabilized housing dampens noise for quiet operation
- AquaOxy 450 is designed to supplement aeration in OASE ProfiClear Compact filters

•	Stainless steel regulating valves allow for easy air adjustment to	
	air stones	

OXYTEX



- ITEM 51075 **DESCRIPTION** OxyTex Underwater Air Difuser MAX PRESSURE 5.8 psi MAX DEPTH 16.6 **MAX LPM DIMENSIONS** 9"W x 12"H **TUBING SIZE** 3/16" x 16' 16' of 3/16" air hose, air hose adapter for larger diffuser tubing INCLUDES and diffuser plate WARRANTY 2-year
- Aeration systems maintain high oxygen levels in summer and aid in gas diffusion in winter
- Oase OxyTex combines a high efficiency pond diffuser with high surface area filter medium
- Provides a unique combination of gas diffusion, water circulation Designed for use with the Oase AquaOxy 450 and nutrient decomposition
- The ideal habitat for benefical bacteria, the OxyTex improves filtration efficiency and contributes to a healthy pond environment
- Supplements ammonia and nitrite removal capability of the pond bacteria with replaceable air stone



•	Pond de-icers maintain a small area free of ice, allowing oxygen
	in and toxic gases like carbon dioxide and methane out of pond
	water in winter

- Atlantic's Pond De-Icer saves energy by cycling on and off, maintaining an internal temperature of 200° under the worst
- Constructed of high strength and high temperature PPS polymer for maximum durabilty
- Internal thermostat turns heater on just above freezing and off as water warms for fully automatic operation

ITEM	73986
MODEL	PD300
DESCRIPTION	Pond De-Icer
VOLTS	120
WATTS	300*
CORD LENGTH	20'
DIMENSIONS	8"W x 4"H
WARRANTY	1-year

- Indicator light shines blue to show the De-Icer is in standby mode when plugged in with water temperature above freezing
- Indicator light shines green to show water temperature is below freezing and De-Icer is in operation
- *Efficient heating element only draws 300 watts when needed to keep a small area free of ice and operating costs low



TECH TIP

Unlike typical de-icers that only indicate the heating cycle, Atlantic's De-Icer shines blue to show the unit is plugged in and operational even when the water temperature is above freezing. As the temperature drops the light changes to green, cycling on and off to indicate active heating. This not only saves money by only using electricity when heating, it also verifies the unit is ready for operation before icing even occurs.



BIOMAX - WEEKLY BIOLOGICAL CONDITIONER



- · Beneficial bacteria metabolize organic waste and neutralize odors
- Atlantic's BioMax contains potent strains with billions of bacteria
- Improved ecological balance lowers nitrates that promote unwanted plant growth
- Use weekly to reduce organics and keep water clear and healthy

BIOMAX+ - ENHANCED BIOLOGICAL CONDITIONER





- Liquid bacterial formula naturally removes organic debris, ammonia and nitrates
- Atlantic's BioMax+ balances pond ecosystem, enhances bacterial activity and seeds biological filters
- Specialized bacterial mix speeds up the natural cycle that maintains a healthy balanced ecosystem
- Use weekly to remove toxins and promote excellent water quality

ECOKLEAN - OXY POND CLEANER





- Oxy pond cleaners quickly remove attached organics and algae stains from rocks, waterfalls and streambeds
- Atlantic's EcoKlean fast dissolving granules lift debris to the surface with the power of pure oxygen
- Regularly use may eliminate the need for disruptive, expensive pond clean-outs
- Use as needed to keep hard surfaces clean and free of attached organics

ITEM	74058	74059	74060	74061	74063	74062	74082	74084	74083
MODEL	WTBM1	WTBM2	WTBM6	WTBM16	WTBM32	WTBM1G	WTEK1	WTEK2	WTEK10
DESCRIPTION	BioMax			BioMax+			EcoKlean		
SIZE	1 lb.	2 lbs.	6 lbs.	16 oz.	32 oz.	1 gal.	1 lb.	2 lbs.	10 lbs.
TREATS	16,000 gallons	32,000 gallons	96,000 gallons	6,000 gallons	12,000 gallons	48,000 gallons	400 ft²	800 ft ²	4,000 ft ²

CLARITYBLAST – COMBINATION POND CLEANER



- · Pond cleaners keep waterfalls, streams, ponds, plant pots and filters clean
- Atlantic's ClarityBlast is an all-natural proprietary treatment with bacteria and enzymes
- Keeps pond water and hard surfaces clean by removing attached organics
- Use as directed to remove algae stains and attached organics

REVIVE - DECHLORINATOR WITH STRESS REDUCER



- Dechlorinators remove fish-toxic chlorine, chloramines, ammonia and heavy metals in tap water
- Atlantic's ReVive with stress reducer thickens the slime coat of Goldfish and Koi in times of stress
- Enhancing protective slime coat of fish helps fish recover from cuts and abrasions
- Use every time water is added or when moving fish

QUICKCLEAR - WATER CLARIFIER



- Water clarifiers temporarily flocculate, or clump together suspended particles, making them sink to the bottom
- Atlantic's QuickClear restores brilliant clarity to water clouded by sediment or organics
- Once out of suspension, debris can be easily filtered or vacuumed out
- Use to clear water after heavy rains or prolonged heat spells or before vacuuming

ALGAECIDE – ALGAE REMOVER



- · Algaecide eliminates existing algae growth
- Pond Boss Algaecide is fast acting for ponds and water features
- Safe for fish and plants when used as directed

ITEM	74064	74064 74065		74075	74067	74068	54169
MODEL	WTCB1	WTCB2	WTCB6	WTRV32	WTQC16	WTQC32	
DESCRIPTION		ClarityBlast		ReVive	Quick	Algaecide	
SIZE	1 lb.	2 lbs.	6 lbs.	32 oz.	16 oz.	32 oz.	64 oz.
TREATS	8,000 gallons	16,000 gallons	48,000 gallons	6,400 gallons	8,000 gallons	16,000 gallons	18,900 gallons







POND GLOVES



- Neoprene pond gloves offer welcome protection against cold water
- Durable and elastic neoprene is a full 2mm thick for long lasting comfort
- Rubber coated palm for comfort and excellent grip
- Adjustable wrist strap keeps gloves from slipping
- Available in five sizes from small up to 2XL

	ITEM	91657	91658	91659	91660	91661
Ì	DESCRIPTION Neoprene Pond Gloves		Neoprene Pond Gloves Neoprene Pond Gloves		Neoprene Pond Gloves	Neoprene Pond Gloves
	SIZE Small / 7		Medium / 8	Large / 9	X-Large / 10	XX-Large / 11

AQUATIC PLANT BASKET



ITEM	45386
DESCRIPTION	Aquatic Plant Basket
DIMENSIONS	10"L x 10"W x 6"H
WARRANTY	1-year

- Durable plastic mesh allows aquatic plant roots to more efficiently Makes pruning, fertilizing and maintenance more convenient remove excess nutrients from the water column
- Strong construction keeps plants under control over multiple growing seasons

EASYPICK



ITEM	42764
DESCRIPTION	EasyPick
DIMENSIONS	54"L x 3½"W
WARRANTY	2-year

- Oase EasyPick premium pond pliers facilitate the removal of cords, Rubberized triple gripper provides firm, secure hold of even fixtures, plant baskets, debris large and small, even leaves
- Adjustable 78" telescoping handle reaches into the most inaccessible corners and depths, no need to get wet
- slippery objects and debris

FLEXICUT 2-IN-1



ITEM	46970
DESCRIPTION	FlexiCut 2-in-1
DIMENSIONS	65½"L x 2½"W
WARRANTY	2-year

- 2-in-1 pond scissors simultaneously cut and hold pruned
- Adjustable head accomodates multiple working angles to protect the pond liner from cuts
- Also suitable for cutting terrestrial plants and thin branches





- Netting keeps out leaves and other wind-blown debris for a clean pond in the fall and spring
- Durable poly netting is UV-resistant for extended lifespan
- Physical barrier also protects fish from heron and other predators
- Netting your pond reduces organic wastes that can fuel algae growth and reduce oxygen levels
- ½" x ½" openings keep out smaller windblown debris
- 4 pre-cut and 3 roll sizes fit most water feature designs
- New stake design is longer with a larger diameter head for improved net retention
- Stakes available in 50 piece quantities for use with 100' rolled netting




ITEM	74047	74048	74050	74051	74046	74049	74052	74053
MODEL	PN1015	PN1520	PN2020	PN2030	PN10100	PN20100	PN30100	PNS50
DESCRIPTION	IPTION Pond Netting					Net Stakes		
SIZE	10' x 15'	15' x 20'	20' x 20'	20' x 30'	10' x 100'	20' x 100'	30' x 100'	6"L x 1 ½"W
HOLE SIZE	7/2" × 7/2"							
INCLUDES	12 UV-Resistant Net Stakes					50 Net Stakes		
WARRANTY	1-year							

TECH TIP

To prevent leaves from decomposing and fouling the water, stretch your nets as tightly as possible over the water feature just before the leaves begin to fall. This will keep the leaves from sinking to the bottom. For best results elevate the net with the Pond and Garden Protector to cover the pond completely. For larger ponds, the Protector can even be used to elevate the center of oversized nets.



POND & GARDEN PROTECTOR

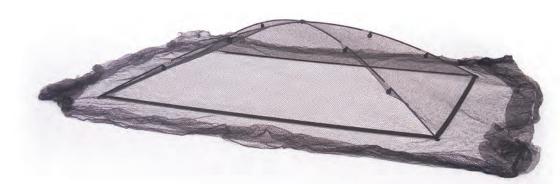

- The Pond and Garden Protector elevates the netting to keep leaves and other wind blown debris out of your pond or garden
- Domed design allows pond and garden plants to grow unobstructed under netting
- UV-resistant poly netting extends usable life

- $\frac{1}{2}$ " x $\frac{1}{2}$ " openings protects fish from heron and other predators
- Helps prevent algae growth by reducing organic waste that enters your pond
- Keeps out rabbits, deer and other herbivores to protect your garden during the growing season

ITEM	74045	74044			
MODEL	PGPSM	PGPLG			
DESCRIPTION	Pond & Garden Protector - Small	Pond & Garden Protector - Large			
NET SIZE	15' x 20'	20' x 20'			
ASSEMBLED SIZE	7'W x 9'L x 2'H	9'W x 12'L x 2½'H			
INCLUDES	Nylon Base, Center Receptor, (4) Fiberglass Poles, (4) 12' Tie-downs, (4) Ground Stakes, (12) Net Stakes, (8) Net Clips Nylon Base, Center Receptor, (4) Fiberglass Poles, (4) 12' Tie-downs, (4) Ground Stakes, (12) Net Stakes, (8) Net Clips				
WARRANTY	1-year				



POND FEATURES:

- Keeps out leaves and other windblown debris
- Protects fish from heron and other predators
- Helps prevent algae growth by reducing organic waste



GARDEN FEATURES:

- Protects fruiting plants and vegetables
- Allows for sunlight and optimum plant ventilation
- Can be covered with plastic to protect against frost


144 ATI ANTIC 145

P&L POND & LAKE

Atlantic's Aeration System offers everything you need for the health and maintenance of large ponds and lakes. The sophisticated suite of products includes powerful Air Compressors, sub-surface Diffusers and decorative floating Aerators optimized for every size and depth body of water. We took our time to develop the best system on the market today — efficient and economical, engineered for excellence!

- >> Air Diffusers are economical to ship, easy to deploy and maintain and more efficient at circulation and gas diffusion
- >> Robust Compressors are reliable, rebuildable and economical to run and service
- » Fully equipped Cabinets protect and soundproof equipment securely
- >> Long lasting Direct Burial and Weighted Tubing simplifies sub-surface installation
- >> Floating Fountain Aerators that excel in shallow water offer visual displays by day and night
- >> Treatments provide solutions for almost every pond and lake problem
- >> All Systems come complete with every component needed for your project



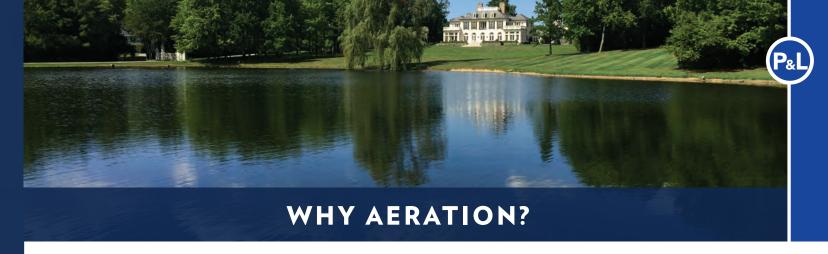

Oxygen is essential to the biology of a healthy pond or lake, but it's often in short supply. When there isn't enough oxygen, fish and other aquatic animals can suffocate, wastes generate noxious gases and water may foul.

Subsurface aeration brings oxygen levels up, dissipates toxic gases and evens out temperature and saturation levels throughout the water feature. Aeration is also the most efficient way to circulate water, moving 10 times as much per watt as water pumps.

Finally, aeration greatly accelerates the decomposition of solid and dissolved wastes. Although smaller water features may respond to other strategies, aeration is the only way to effectively manage nutrient removal, algae, water quality and clarity in larger lakes, not to mention reducing pests and parasites.

WITHOUT AERATION

SIGNS OF IMBALANCE:

- Algae, opaque green water or excessive growth of string or blanket weed
- An excess of submerged vegetation and rampant marginal aquatic plant growth
- Foul odors, of the water or of the sediments at the bottom
- · Dead fish, especially after a storm or a change to cooler weather
- Small, few or no live fish at all

CAUSES OF IMBALANCE:

- · Excessive nutrients in the water and the sediment
- Insufficient total dissolved oxygen levels
- · Stratification and thermoclines that cut off surface oxygen



WITH AERATION



BENEFITS OF AERATION:

- Aeration creates bubbles that increase the surface area of air in contact with the water
- Millions of bubbles moving upwards pull huge volumes of water up from the bottom
- Oxygen-poor water rushes upwards, eliminating thermal layers, shedding toxic gases and picking up oxygen
- Oxygen-rich water circulates down to the bottom, promoting the growth of bacteria that digest organic sludge and eliminate excessive nutrients



73978



DIFFUSERS & COMPRESSORS



73976

- Air Diffusers distribute compressed air to the bottom of the body of water where gas exchange and circulation are needed most
- Atlantic's Air Diffusers feature a streamlined body design and innovative diffuser tubing that circulates water more efficiently
- Extruded EPDM diffuser tubing proven in industrial applications offers tremendous longevity and resistance to fouling

- Bubble sizes decrease as pressure rises; smaller bubbles maximize surface area for extremely efficient gas diffusion and circulation
- Easy to fill on-site with sand or gravel, Diffusers ship empty to save weight and freight
- Easily replaceable tubing and stainless steel hardware extends usable service life of Diffusers

ITEM	73978	73976			
MODEL	TPSDIF	TPDDIF			
DESCRIPTION	Shallow Water Diffuser	Deep Water Diffuser			
FLOW RATE	15 - 75 LPM	25 - 150 LPM			
DIMENSIONS	13½"L x 12"W x 8½"H 18"L x 16"W x 10½"H				
WARRANTY	5-year				

TYPHOON DIFFUSER FEATURES:

- 1. Heavy-walled diffuser tubing produces ultra-fine bubbles with little back pressure.
- 2. Diffuser shape accelerates the rising water column.
- 3. Full flow manifold evenly distributes air to the diffuser tubing.
- 4. Push-lock manifold connection simplifies servicing.
- 5. Integrated strain relief for ½" and ¾" weighted tubing.
- 6. Includes 3/4" check valve, 3/8" insert fitting and stainless steel strain relief bracket.

To convert Atlantic **Aeration Systems to** 1/2" Weighted Tubing see page 150.





SHALLOW WATER AIR COMPRESSORS



73973

73975





less maintenance than cheaper linear diaphragm systems • Designed for the shallows, linear piston compressors combine the

ITEM MODEL 73974 **TPS200** 110 / 3.9 85 / 3.0 65 / 2.3 50 / 1.8 35 / 1.2 15 / 0.5 TPS400 LPM / CFM 240 / 8.5 190 / 6.7 150 / 5.3 115 / 4.1 85 / 3.0 55 / 1.9 25 / 0.9 73975

DEEP WATER AIR COMPRESSORS







- Gast rocking piston Deep Water Air Compressors with high pressure output are the best choice for ponds from 7 to 35 feet deep
- Dual aluminum pistons, hard-coated cylinders and replaceable piston seals make these compact workhorses as long lasting as
- Replaceable air filter keeps dust and abrasives out for longevity





- Rubber mounting feet help keep these compressors as quiet as they are dependable
- Quiet, damped operation for minimum noise and vibration
- Rebuildable, with components easily accessible for simple maintenance and servicing
- Deep Water Air Compressors have 6' power cords and intake filter

ITEM	MODEL		MAX	@10'	@15'	@20'	@25'	@30'	@35'
73973	TPD87R6	LPM / CFM	130 / 4.6	125 / 4.4	119 / 4.2	113 / 4	108 / 3.8	102 / 3.6	99 / 3.5
73972	TPD72R6	LPM / CFM	165 / 5.8	156 / 5.5	150 / 5.3	144 / 5.1	142 / 5	139 / 4.9	136 / 4.8

ITEM	73974	73975	73973	73972		
MODEL	TPS200	TPS400	TPD87R6	TPD72R6		
DESCRIPTION	Shallow Water Compressor for TPS200C	Shallow Water Compressor for TPS400C	Deep Water Compressor for TPD100C & TPD200C	Deep Water Compressor for TPD300C & TPD400C		
VOLTS		11	5			
AMPS	0.9	1.4	4.4	5		
WATTS	102 160					
INLET			¼" FIPT			
OUTLET	3/8" [-IPT	¼" FIPT			
MAX PRESSURE	5.1 psi	5.8 psi	30 psi			
MAX DEPTH	6' 7' 35'					
CORD LENGTH	6'					
DIMENSIONS	10"L x 5½"W x 7"H	11"L x 6"W x 8"H	10"L x 6½"W x 7"H	11"L x 7½"W x 7½"H		
WARRANTY	2-year					



WEIGHTED TUBING

- Atlantic's Tubing is made of the highest quality materials for long, trouble-free service life
- Thick-walled Weighted Tubing sinks without the inconvenience of adding weights to keep tubing from floating
- High density PVC formulation remains flexible in a wide range of temperatures
- Nickel-plated insert fittings, supplied with every roll, make connecting Weighted Tubing of different lengths simple and secure
- TPF12WT Fitting Kit available to convert Atlantic Diffusers and Aeration Cabinets to $\frac{1}{2}$ " weighted tubing for runs over 300 feet



ITEM	73983	73984	73985	73982	73977
MODEL	TPT38050	TPT38100	TPT38500	TPT12500	TPF12WT
DESCRIPTION	³⁄₅" x 50' Weighted Tubing	³⅓" x 100' Weighted Tubing	3%" x 500' Weighted Tubing	½" x 500' Weighted Tubing	Fitting Kit for ½" Weighted Tubing Conversion
I.D.		3/8"	1/2"		
O.D.		0.69"			
WEIGHT	10 lbs.	20 lbs.	100 lbs.	190 lbs.	
INCLUDES	¾" insert coupling ½" insert coupling				½" MPT x ½" Insert & ¾" MPT x ½" Insert Adapters
WARRANTY	RANTY 5-year				

DIRECT BURIAL TUBING

- Low friction Direct Burial Tubing brings the air to the water's edge economically
- Tubing is made of UV-stabilized PVC for long life under the harshest conditions
- Push-lock fittings allow for quick, secure connection of Direct Burial Tubing between the Cabinet and the Weighted Tubing at the shoreline
- Tool-free connections simplify tubing installation



ITEM	MODEL	SIZE	I.D.	O.D.	WEIGHT	INCLUDES	WARRANTY
73979	TPB12100	½" x 100' Direct Burial Tubing	5/8"		10 lbs.	½" MPT / FPT Push-lock fittings	5-year

POND CLARIFIER

Custom bacterial strains clear pond water by consuming dissolved organics. Simply toss in appropriate number of 8 ounce water soluble packets each month for clear, clean water year round. Safe for fish, plants, livestock and pets.

ITEM	74076	74077		
MODEL	TPWCP06	TPWCP24		
DESCRIPTION	Pond Clarifier			
SIZE	12 packets - 6 lbs.	48 packets - 24 lbs.		
DOSAGE	1 packet per ¼ acre every two weeks	4 packets per acre every two weeks		
TREATS	¼ acre pond for 6 months	1 acre pond for 6 months		



POND CLARIFIER +TM

Concentrated bacteria in 3 ounce slow release tablets with double the colony forming units (CFUs) per gram, Pond Clarifier Plus Trace Minerals accelerates organic removal and improves overall pond health. Safe for fish, plants, livestock and pets.

ITEM	74078	74079		
MODEL	TPWPP06	TPWPP24		
DESCRIPTION	Pond Clarifier +TM			
SIZE	32 tablets - 6 lbs.	128 tablets - 24 lbs.		
DOSAGE	2 tablets per ¼ acre every two weeks	8 tablets per acre every two weeks		
TREATS	¼ acre pond for 8 months	1 acre pond for 8 months		



POND DYE

Whether you prefer liquid dye or easy to apply dissolvable packets of powdered dye, Typhoon Pond Dye shades the water to eliminate plant growth below the surface. Available in both blue and black, concentrated dye can be mixed to create your own favorite shade. Safe for fish, plants, livestock and pets.



ITEM	74090	74088	74091	74089	74093	74092
MODEL	TPWDBLU2	TPWDBLK2	TPWDBLU4	TPWDBLK4	TPWDBLUG	TPWDBLKG
DESCRIPTION		Pond Dye				
SIZE	2 packets 4 packets			ckets	1 ga	illon
DOSAGE	1 packet per acre-foot				¼ gallon pe	er acre-foot
TREATS	½ acre 4' - 6' deep 1 acre 4' - 6' deep					

ATIANTIC 151





With the most efficient products on the market, we address multiple water quality parameters in a single application—making nutrient management more accessible than ever for pond owners and water managers. By tackling all three elements, we go beyond temporary "quick fixes" to resolve the root causes of water quality decline—creating healthier, more resilient waters that sustain biodiversity, enhance aesthetics, and reduce long-term management costs. For detailed information, case studies, advanced application methods on all Oase Lake Therapy products, scan the QR code or visit **www.oaselaketherapy.com**



SCHLIXX & SCHLIXX PLUS



ITEM	94774	94778	94775	
DESCRIPTION	SchlixX	SchlixX Plus		
SIZE	50 lb.	10 lb. 50 lb.		
COVERAGE	4,882 sq. ft / 0.11 acre	1,000 sq. ft. 4,882 sq. ft / 0.1		

- SchlixX and SchlixX Plus is the solution to your organic sediment and related phosphate issues
- Permanently binds phosphates to remove excess nutrients
- Buffers pH to improve biological activity and efficiency at the sediment level
- Adds supplemental oxygen and bacteria directly into excess organic deposits
- Accelerates sediment digestion in a sustainable and environmentally friendly way
- Reduces or eliminates the need for disruptive dredging and sediment disposal
- Typically removes 6-12 inches of organic sediment per application

BIOKICK PRO



ITEM	96917				
DESCRIPTION	BioKick Pro				
SIZE	5 lb.				
COVERAGE	4,882 sq. ft. or 0.11 acre				

- BioKick Pro recharges and enhances natural biological balance in the water
- Naturally occurring aquatic bacteria, not genetically modified organisms
- Proprietary blend of bacteria that specifically and efficiently degrade dead organic matter
- Fast-acting aerobic bacteria adaptable to low oxygen environments as facultative anaerobes
- Pure cultivation process of microorganisms in a sterile environment guarantees bacteria integrity
- Proprietary sporulation process ensures a very high level of revitalization and a long shelf life

SEDOX & SEDOX MAX



- SeDox Max requires significantly lower dosages compared to conventional P binders

• SeDox is the solution to your nutrient and water quality issues

- Phosphates can adversely affect water quality at very low concentrations under 1 part per million
- 50 lbs of SeDox binds 1 lb of phosphate, rendering it inert and incapable of fueling algae blooms while SeDox Max binds up to 1.5 lbs per 50 lbs of product

- ITEM
 94778
 98646

 DESCRIPTION
 SeDox
 SeDox Max

 SIZE
 50 lb.
 50 lb.

 BINDS
 1 lb. of phosphorus
 1.5 lbs. of phosphorus
- Releases oxygen into the water and balances pH, leaving no residues behind
- Promotes the decomposition of organic sludge and sediment by adding oxygen
- Provides rapid phosphorus binding and secures it permanently as a stable, insoluble mineral compound

OPTILAKE

ITEM



DESCRIPTIONOptiLakeSIZE50 lb.

94777

- OptiLake is the solution to your pH Stabilization issues
- Regulates and buffers pH and carbonate hardness better and lasts longer than liming
- A single application stabilizes water chemistry for an entire year
- Improves biodiversity of aquatic organisms that contribute to a healthy lake environment
- Reduces the formation of ammonia and toxic side effects.

8LB BLOCK



- 8lb Block is the solution to your water quality issues using beneficial bacteria
- Offers ongoing bacterial maintenance through time-released addition of beneficial bacteria
- Significantly reduces noxious odors caused by hydrogen sulfide, dead plant material and fish waste

ITEM	94782					
DESCRIPTION	8lb. Block					
SIZE	8 lb.					
TREATS	8 acre feet or 2.6 million gallons					

- Improves dissolved oxygen level while reducing ammonia and nitrogen levels
- Consumes dead organic sediment in up to 8 acre-feet of water for up to 60 days

OASE PRO 1





SHALLOW WATER AERATION CABINETS

- Includes Typhoon Linear Piston Shallow Water Compressor
- Easily adjusted locking manifold assemblies provide flow control to multiple Diffusers
- Heavy-duty Cabinets secure and protect components while muffling the sound of compressors
- Atlantic's Cabinets have a reinforced lockable lid and sturdy hinges with vandal resistant screws for secure installation
- Double walled for noise insulation and durability
- Integrated cooling fan keeps components from overheating under the harshest conditions
- Filtered air intake protects the compressor from dust and debris



ITEM	73964	73965		
MODEL	TPS200C	TPS400C		
DESCRIPTION	2-Outlet Shallow Water Assembly 4-Outlet Shallow Water Assembly			
WEIGHT	55 lbs. 60 lbs.			
DIMENSIONS	24"L x 22"	'W x 20"H		
POND DEPTH	Ponds up to 6' deep	Ponds up to 7' deep		
INCLUDES	Cabinet with 2-outlet manifold and Linear Piston Compressor Cabinet with 4-outlet manifold and Linear Piston Compressor			
WARRANTY	2-year			

DID YOU KNOW?

Ventilation is crucial for proper functioning of components inside of the Cabinet. An inlet at the bottom rear of the Cabinet allows air to be drawn in directly over the Air Compressor as it is pulled out by the fan at the top of the Cabinet, cooling the motor and prolonging the time between servicing.



TYPHOON AERATION CABINET FEATURES:

- 1. Weatherproof, double walled Cabinet for strength and noise insulation.
- 2. Industrial hinges, rubber "T" hasp closures and stainless steel locking plates for maximum security and service life.
- 3. Aluminum manifold block with full flow $\frac{1}{2}$ " inlets and outlets, and flow adjusters.
- 4. High volume cooling fan in lid vents air through wall cavity for maximum cooling and minimum noise.
- 5. Large filtered air inlet at lower rear of cabinet for complete circulation.
- 6. PVC tubing with push lock quick release fittings.
- 7. Solid brass nickel plated fittings for maximum durability.



SHALLOW WATER AERATION SYSTEMS





73970

 Shallow Water Aeration systems combine all of the components you need to aerate ponds and lakes up to 7' deep and a half acre in surface area

 Complete systems include Aeration Cabinet Assemblies with all subcomponents pre-installed, Shallow Water Diffusers, Weighted Tubing and all necessary fittings

ITEM	73970	73971		
MODEL	TPS200S	TPS400S		
DESCRIPTION	Shallow Water Aeration System with Two Diffusers	Shallow Water Aeration System with Four Diffusers		
VOLTS	115			
AMPS	0.9	1.4		
WATTS	112	170		
MAX LPM	110	240		
MAX CFM	3.9	8.5		
COVERAGE AREA	Up to ¼ surface acre	Up to ½ surface acre		
COVERAGE AREA @ 2'	⅓ acre	¼ acre		
COVERAGE AREA @ 4'	% acre	⅓ acre		
COVERAGE AREA @ 6'	¼ acre	½ acre		
POND DEPTH	Ponds up to 6' deep	Ponds up to 7' deep		
INCLUDES	Cabinet with 2-outlet manifold and Linear Piston Compressor, (2) TPT38100 Weighted Tubing and (2) TPSDIF Shallow Water Diffusers	Cabinet with 4-outlet manifold and Linear Piston Compressor, (4) TPT38100 Weighted Tubing and (4) TPSDIF Shallow Water Diffusers		
WARRANTY	2-у	ear		

54 ATI ANTIC



DEEP WATER AERATION CABINETS

- Includes Gast rocking piston Deep Water Air Compressor
- Easily adjusted manifold assemblies provide flow control to multiple Diffuser systems
- Oil-filled pressure gauge and pressure relief valve monitor and protect compressor for enhanced reliability and longevity
- · Heavy duty double-walled Cabinets secure and protect components while muffling the sound of compressors
- Atlantic's Cabinets have reinforced lockable lids and sturdy hinges with vandal-resistant screws for secure installation
- · Integrated cooling fan keeps components from overheating under the harshest conditions
- Filtered air intake protects the compressor from dust and debris



ITEM	73960	73960 73961 73962		73963			
MODEL	TPD100C-87R6	TPD200C-87R6	TPD300C-72R6	TPD400C-72R6			
DESCRIPTION	1-Outlet Deep Water Assembly	2-Outlet Deep Water Assembly	3-Outlet Deep Water Assembly	4-Outlet Deep Water Assembly			
WEIGHT	60	lbs.	72	bs.			
DIMENSIONS		24"L x 22"W x 20"H					
POND DEPTH		7' - 35	Deep				
INCLUDES	Cabinet with 1-outlet manifold and Rocking Piston Compressor	Cabinet with 2-outlet manifold and Rocking Piston Compressor	Cabinet with 3-outlet manifold and Rocking Piston Compressor	Cabinet with 4-outlet manifold and Rocking Piston Compressor			
WARRANTY	2-year						

DID YOU KNOW?

Aeration is a powerful tool. There are times when full implementation without an acclimation period can lead to disaster. In warm weather it is best to start slowly to avoid a "turnover", where deoxygenated bottom water is mixed in so quickly that total dissolved oxygen levels plummet to lethal levels. To be safe it's best to run the system for only 15 minutes the first day, 30 minutes the second, 1 hour on the third day, doubling the running



















DEEP WATER AERATION SYSTEMS

73967

73969









73968

73966

• Atlantic's Deep Water Aeration Systems offer complete solutions for lakes 7' to 35' in depth and 4 surface acres in area

• Complete systems come with Aeration Cabinet Assemblies with all subcomponents pre-installed, Deep Water Diffusers, Weighted Tubing and all necessary fittings

ITEM	73966	73967	73968	73969		
MODEL	TPD100S-87R6	TPD200S-87R6	TPD300S-72R6	TPD400S-72R6		
DESCRIPTION	Deep Water Aeration System with One Diffuser	Deep Water Aeration System with Two Diffusers	Deep Water Aeration System with Three Diffusers	Deep Water Aeration System with Four Diffusers		
VOLTS		11	5			
AMPS	4	5	5	.1		
MAX LPM	13	50	16	55		
MAX CFM	4	.6	5	8		
COVERAGE AREA	Up to 1 surface acre	Up to 2 surface acres	Up to 3 surface acres	Up to 4 surface acres		
COVERAGE AREA @ 8'	¼ acre	⅓ acre	½ acre	1 acre		
COVERAGE AREA @ 12'	½ acre	⅓ acre	¾ acre 1 acre			
COVERAGE AREA @ 16'	³¼ acre	1 acre	1½ acres	3 acres		
COVERAGE AREA @ 20'	1 acre	2 acres	3 acres	4 acres		
POND DEPTH		Ponds and lakes bet	ween 7' and 35' deep			
INCLUDES	TPD100C Cabinet Assembly, TPT38100 Weighted Tubing and TPDDIF Deep Water Diffuser	TPD200C Cabinet Assembly, (2) TPT38100 Weighted Tubing and (2) TPDDIF Deep Water Diffusers	TPT38100 Weighted Tubing and TPT38100 Weighted Tub			
WARRANTY	2-year					



FLOATING FOUNTAIN WITH LIGHTS



45383

- Floating fountains offer economical shallow water aeration combined with an attractive visual display
- · Oase Floating Fountains with Lights are compact, reliable and energy efficient
- Each Floating Fountain comes complete and ready to connect
- Designed for use in smaller water features with a minimum depth of 30"
- 3 LED spotlight illumination set brings the various water patterns to life after dark via optional photocell
- Choose from 3 ornamental nozzle attachments Trumpet, Single Tier and 3-Tier



45393

- Grounding plate eliminates any chance of stray current entering water for unparalled safety
- Coated magnetic rotors are impervious to adverse water conditions
- Self-cooling, debris flushing rotor chambers keep pumps from overheating in the most demanding applications
- Tool-less volute removal makes maintenance fast and easy
- Nylon jacket on power cord keeps line from tangling (1/2 HP only)
- Includes pump, float body, mooring lines, pump shield, stainless steel mooring anchors, lights and 3 nozzles

ITEM	45383	45393			
DESCRIPTION	Floating Fountain with Lights 1/4 HP Floating Fountain with Lights 1/2 HP				
VOLTS	120				
WATTS	130 230				
MAX HEIGHT	10'	14'			
MAX FLOW	2300 gph	5150 gph			
MOORING LINE	100'	150'			
CORD LENGTH	50' 75'				
DIMENSIONS	14½"W x 19"H 23"W x 16¾"H				
WARRANTY	2-ye	ar + 1			



ITEM	95474			
DESCRIPTION	PondJet Eco Premium			
VOLTS	120			
WATTS	160			
OUTLET	1" (accepts 1" MPT Nozzles)			
MAX HEIGHT	12'			
MAX FLOW	3700 gph			
MINIMUM DEPTH	21"			
CORD	75'			
DIMENSIONS	26¾"L x 26¾"W x 20½"H			
WARRANTY	3-year + 2			

- Floating fountains offer economical shallow water aeration combines with an attractive visual display
- Oase PondJet Eco Premium features a powerful submersible pump and integrated nozzle for a complete drop-in solution, ready to install and connect in minutes
- Powered by an Aquarius Eco Premium pump with Oase Pulse 6 Technology, for smoother running, quieter, more powerful and more efficient performance
- Patented Dynamic Function Control (DFC) offers a built-in 'scene' of changing water patterns and various fountain heights accessed by an onboard switch
- Oase Control compatibility offers 11 more dancing water scenes directly through optional Eco Control or via WiFi on any smart device with the Oase Garden Cloud Controller (sold separately)

- Unique patented frost protection safeguards pumps against frost or freezing down to -4°F so they can remain in place all winter long
- Environmental Function Control (EFC) shuts off the pump to protect it when run dry or clogged, while an integrated grounding plate protects against stray current in the water feature
- Accepts 1" MPT fountain nozzles without modification for a variety of decorative display options
- Enjoy your fountain all night by adding the Floating Fountain RGB Illumination Set with 3 ProfiLux Lights, all controlled by Oase's Garden Cloud Controller

RGB ILLUMINATION SET

PONDJET



- Illumination sets create dazzling nighttime effects of floating fountain displays
- Oase Floating Fountain RGB Illumination Set features Oase Cloud controlled ProfiLux Lights for optimal spotlighting of the PondJet Eco Premium

ITEM	98369			
DESCRIPTION	Floating Fountain RGB Illumination Set			
VOLTS	120			
INPUT	24 volt DC			
WATTS	19			
FOR USE WITH	PondJet & PondJet Eco Premium			
REQUIRES	Garden Cloud Controller (#72380)			
INCLUDES	(3) ProfiLux Garden LED RGB Spotlights, three mounting brackets, ProfiLux Garden LED Controller w/65' cord, 65' Oase Control Connection Cable			
WARRANTY	2-year + 1			

• Set includes three ProfiLux Garden LED RGB spotlights, three brackets for attaching the lights, a ProfiLux Garden LED controller with 65' cable, 65' Oase Control connection cable





FOUNTAIN

TYPICAL FOUNTAIN BASIN INSTALLATION

FOUNTAIN BASIN SYSTEM

For features up to 1,200 pounds per Basin

SIZING PUMPS FOR OVERFLOWING FOUNTAINS:

Provide 10-20 gph per inch of active edge (where water is actively overflowing) for bubbling rocks, overflowing vases and basins:

10 - 20 gph x diameter in inches x 3.14

For example:

400-800 gph for 12" fountain diameter, 600-1,200 gph for 18" diameter 800-1,600 for 24" diameter, 1,200-2,400 for 36" diameter

*Rougher surfaces require greater flows but may splash more

FOUNTAIN BASIN SPLASH CONTROL

- Typical splash zones extend from the source as far out as the feature is tall. A feature 3' tall may splash out 3' in every direction, a 6' diameter splash zone.
- For in-ground installations taller than 23" on an FB4700, or to capture splash from tall drops or excessively rough surfaces, consider creating a liner 'skirt' around the basin or reservoir.
- If splash is caused by water impacting the surface of the basin or reservoir, place a Splash Mat on the horizontal surface where water is falling to capture and suppress any splash. Splash Mat CFSPMA2820 may be purchased in rolls of 28"W x 20'L. See page 9.
- With all Fountain Systems, the use of an Automatic Fill Valve AF1000 to compensate for splash and evaporation losses is strongly recommended. See page 113.

ECO-RISE SYSTEM

Accommodates multiple large or heavy decorative features, as many as six per PV7500 Pump Vault, fed by two TT4000 pumps through Eco-Rise Diverters. Eco-Rise weight distributors elevate the decorative elements over lined Eco-Blox reservoirs, allowing features to be plumbed, lit internally and moved with ease. Use multiple PV7500 Pump Vaults per reservoir for projects of greater than six pieces. Use multiple Eco-Rises to support massive elements in larger water features.

ECO-RISE SYSTEM CAPACITIES:

- Each 20" Eco-Rise supports up to 3,000 pounds, 1,200 pounds per 12" Eco-Rise
- Eco-Blox and Eco-Blox Small support 7 tons of distributed load on Eco-Rises
- For larger decorative elements, use multiple Eco-Rise units as needed

TYPICAL ECO-RISE INSTALLATION

BASIC ECO-RISE INSTALLATION

A reservoir of five Eco-Blox Small with one PV7500 Pump Vault, 48" wide by 53" long is sufficient for single and tandem Vase or Bowl installations, and many stone and column installs. Excavate at least 12" wider and longer than blocks and Vault, 60" wide by 65" long, to allow ample space for backfilling. A depth of 15" measured from the lowest point along the perimeter will allow sufficient gravel to cover 9" tall Eco-Blox, Eco-Rises, Pump Vault and plumbing. Dig an additional depth of 7½" where the Pump Vault will be placed. An 8' x 8' liner is large enough for the reservoir. If your installation will splash outside the reservoir, a 10' x 15' liner will provide about two to three feet of liner "skirt" all around to capture splash. Set underlayment in the excavation to protect the liner, then set the liner with the excess distributed evenly all around. An inner layer of underlayment is recommended for added protection. Set the five Eco-Blox Small and the PV7500 Pump Vault in the excavation as shown. Pull underlayment and liner up snug and fold over the top of the Eco-Blox, then backfill in 6" lifts. Take care not to displace Eco-Blox as each layer is backfilled and stepped in. Grade the surrounding soil to capture any splash, then unfold the underlayment and liner and cover all with gravel.

FOR 3-6 FEATURES, UP TO 1,250 GPH EACH:

For up to three decorative features, install one TT4000 pump, Triton Check Valve and one Eco-Rise Diverter in the Pump Vault to supply and balance a total of 3,750 gallons per hour to up to three features through 1" Sch40 PVC flex tubing. Because each PV7500 Pump Vault will accommodate two TT4000 pumps, two Triton Check Valves and two Eco-Rise Diverters, you can distribute 7,500 gph to up to 6 individual pieces.

FOR LARGER FLOW FEATURES:

Install one or two TT3000 pumps per PV7500 Pump Vault to supply larger features with up to 2,000 gph each through 11/2" tubing.

TECHNICAL DATA

I IGHTING:

- For Basalt Columns and cored boulders with 2" bore holes, use the Warm White Fountain Light WWFL2 to illuminate the water coming out of the top of the stone for a 'liquid torch' effect.
- For Brass Aura Vases, Hammered Brass and Copper Bowl installations, use a Warm White Ring Light WWRL5 and Cord Seal Fitting CSEAL15 on page 113 to illuminate the vessel from within the water. This will brightly light the inside of the feature and cast rippling light onto overhanging structures, while the Cord Seal allows the light cord to pass through the bowl invisibly. See detail at bottom of page 165.
- Install the Ring Light before plumbing the feature, beginning with the Cord Seal. Turn the Bowl or Vase over and install the included 11/2" male thread x slip adapter (male adapter) in the offset threaded inlet.

BEST PRACTICE: Use sealant tape or silicone on all threaded connections.

- Set the Ring Light over the center standpipe and run the cord through the installed male adapter from the top down, then install the Cord Seal Fitting on the cord following the included instructions. Slide the Cord Seal into the male adapter, retaining nuts first, screws visible. Adjust the cord snug but not tight, then tighten the screws firmly to expand the Fitting in the adapter.
- The lights inside bowls or stones may be easily synchronized with external Spotlights and Hardscape Lights to extend the effects into the surrounding landscape or hardscape.

HAMMERED BRASS BOWL, COPPER SPILLWAY BOWL & AURA VASE INSTALLATIONS ON ECO-RISE SYSTEM

Set Aura Vase or Hammered Brass Bowl in the desired final location in the landscape or hardscape. Decide where the Pump Vault should be and mark out the reservoir location. Build the basic Eco-Rise reservoir outlined in the previous section, or to suit your installation. Pre-install the Ring Light, see above, before plumbing the fixture.

For a single Aura Vase, turn the vase over and install a $1\frac{1}{2}$ " male thread x slip adapter (male adapter) in the center inlet. Measure the distance from the male adapter to the bottom of the Bowl or Vase, then set the Vase in position and measure from the base of the fixture to the Pump Vault. Add the two plus another 12". Cut a piece of $1\frac{1}{2}$ " flexible PVC that combined length and glue it into the male adapter. Set assembly on Eco-Rise. Skip to CONNECTION TO PUMP, below.

For a single Bowl, install a 1½" male thread x slip elbow (threaded street 90) in the central inlet. Set the Bowl in position and measure from its base to the Pump Vault. Add 12", cut a piece of 1½" flexible PVC and glue into the male adapter. Set the Bowl with flex pipe on an Eco-Rise. Skip to CONNECTION TO PUMP, below.

CONNECTION TO PUMP - Install the TR215CV Triton Check Valve and optional TRION3 lonizer on the TT pump called for in the specifications for your Vase or Bowl, using the provided 1½" bushing, and place assembly in the Vault. To adjust flow, either install a 1½" slip x slip ball valve or an electronic Atlantic Variable Speed Control TWVSC.

If using the TWVSC, cut the pipe from the Vase or Bowl to fit and glue through the pre-drilled 2" hole in the Vault into the Check Valve. Plug the pump into the TWVSC, then plug in the TWVSC and adjust the flow.

If using the ball valve, glue a 6" piece of $1\frac{1}{2}$ " flex pipe into the Check Valve through the pre-drilled 2" hole in the Vault, then glue a $1\frac{1}{2}$ " slip x slip ball valve to the 6" pipe. Cut the pipe from the Vase or Bowl to fit and glue into valve.


For multiple Aura Vases, turn the Vases over and install a $1\frac{1}{2}$ " male thread x slip adapter (male adapter) in the center inlet of each. Measure from the fitting to the bottom of each Vase, then set each Vase in position and measure from its base to the Pump Vault. Add the two plus another 12". Cut a piece of 1" flexible PVC for each Vase and glue a $1\frac{1}{2}$ " x 1" slip reducing bushing to the end of each length. Glue each reducer/ flex pipe assembly into the male adapters and set each Vase on its own Eco-Rise. Skip to CONNECTION TO ECO-RISE DIVERTER, below.

For tandem Bowls with Pedestal, install a $1\frac{1}{2}$ " male thread by slip elbow (threaded street 90) in the center inlet of the larger, lower Bowl. Cut a 24" piece of $1\frac{1}{2}$ " flex PVC and glue into elbow. Glue a $1\frac{1}{2}$ " slip x slip x slip tee and $1\frac{1}{2}$ " street 90 onto the 24" pipe as shown. Glue $1\frac{1}{2}$ " x 1" slip reducing bushings into the tee and elbow as shown. Set assembly on Eco-Rise.

Install a 1½" male thread x slip adapter (male adapter) in the center inlet of the Spillway Bowl, then glue a 1½" x 1" slip reducing bushing into the male adapter. Set the Bowls and Pedestal in position. Measure the approximate distance from the center of the Spillway Bowl to the Pump Vault and add 12". Cut a piece of 1" flex pipe and glue into the reducing bushing. Skip to CONNECTION TO ECO-RISE DIVERTER, below.

CONNECTION TO ECO-RISE DIVERTER - Install the TR215CV Triton Check Valve and optional TRION3 Ionizer on the TT pump called for in the specifications for your Vases or Bowls, using the provided 2" bushing, and place assembly in the Vault. Glue the Eco-Rise Diverter into the Check Valve through the pre-drilled 2" hole in the Vault. Cut the 1" pipes from the Vases or Bowls to fit and glue into Eco-Rise Diverter.

For All Installations, slope the area around the reservoir so any splash will return to the reservoir, then cover the liner and reservoir with decorative stone or gravel. Fill the reservoir, turn on the pump and adjust the flow.

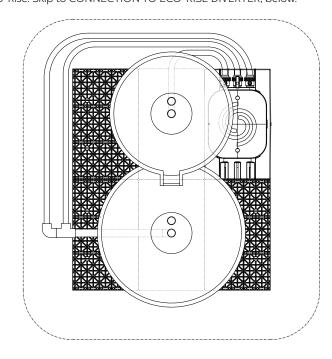

WINTERIAZING & REMOVAL FOR MAINTENANCE

To winterize any of the features in areas where hard freezes are expected, remove the standpipes in the Bowls or Vases to allow the water in them to drain down. Store the standpipes for winter. The small amount of water left the Bowls or Vases will not cause damage. Open the single union immediately inside the Pump Vault of the Check Valve (or Ionizer if so equipped) to allow the water in the plumbing to drain into the Vault. This will also provide a convenient handle for the removal of the pump assembly for end-of-season cleaning and maintenance. The pump assembly may be replaced in the Vault, disconnected, for the winter if the water in the Vault will not freeze solid, or it may be stored out of the weather for the season. If removal of the Bowls or Vases features is desired, disconnect the single unions of the Eco-Rise Diverter if so equipped, or install single unions as required to enable removal.

FLEX BASIN

INSTALLING A PUMP IN A FLEXIBLE FOUNTAIN BASIN:

Atlantic 4' x 4', 4' x 6', 4' x 8' rectangular and 4', 6' and 8' round Flexible Fountain Basins are equipped with integrated cord chases to hide pump and light cords. One runs across the bottom 2" from the vertical wall to 12" from the center of the reservoir. A second chase runs up the vertical wall from 2" above the bottom of the reservoir. This allows the pump to be set in the center of the reservoir with a pump nozzle attached directly to the outlet of the pump. The cord will exit the wall supporting the reservoir between the last vertical course of wall stone and the cap.

To pass the electrical cord of the pump through the wall instead, install a bulkhead fitting to the side of the vertical cord chase. Using an 1½" MIPT x slip male adapter, run a length of conduit through the wall. Installation may require notching the interior of the wallstone to accommodate the thickness of the bulkhead fitting so the liner will lay flat. Pass the cord through the horizontal cord chase, the bulkhead fitting and the conduit. Use a Cord Seal Fitting in the male adapter to seal around the cord and prevent any leakage. Construct wall as needed to hide conduit through wall.

FOUNTAIN NOZZLES

CALCULATING PUMP REQUIREMENTS FOR MULTIPLE NOZZLES

For multiple nozzles add up the volume that each nozzle requires. Determine which nozzle requires the highest pressure. The pump chosen will need to provide the total volume at that highest pressure. For example, if three nozzles require 1,200 gph at 4 psi, 2,400 gph at 6 psi and 3,600 gph at 2 psi respectively, you will need a pump that provides 7,200 gph at 6 psi.

The specification table for each Fountain Nozzle gives the recommended range of flow and pressure for each. Overdriving the volume or the pressure will not significantly increase the maximum height or width of the display but will cost more to operate and put more stress on the system. In order to avoid frequent nozzle clogging, the largest particles passing through the pump should be significantly smaller than the smallest orifice on the nozzle. Inlet screening and/or filtration may be required.

USING LIGHT RING TO ILLUMINATE DISPLAY FROM FOUNTAIN NOZZLES

To illuminate the display from an $1\frac{1}{2}$ " nozzle install an $1\frac{1}{2}$ " adapter at the appropriate height on an $1\frac{1}{2}$ " riser attached to the outlet of the pump. Slip the Ring Light over the male adapter before attaching the nozzle. To illuminate the display from a 1" nozzle, create a base for an Atlantic Ring Light by installing a 1" x $1\frac{1}{2}$ " reducing adapter on the $1\frac{1}{2}$ " riser attached to the outlet of the pump. Adapter should be set at the height appropriate for the nozzle. Install 1" bushing on Light Ring (included with light) and slip the Light Ring over the 1" adapter before attaching the nozzle.

LEVELING NOZZLES

The stainless steel Nozzle Adjustment Base is designed to level Fountain Nozzles that are up to 15 degrees off vertical. Adjustment is best done on a calm day when the wind will not throw off the procedure. Begin by adjusting all screws to leave a ¼" gap between the top and bottom plates. Install the Nozzle Adjustment Base on the pump or plumbing, then attach the nozzle to the Base. Set the pump or plumbing in position and ensure that it is stable and will not move when the pump is in operation. Turn on the pump and note the direction that the water "leans". Turn off the pump and back out the screw closest to the direction of 'lean', counterclockwise, noting the number of turns. Repeat as necessary to plumb the water column. If water column 'lean' is centered between two adjustment screws, adjust both as needed to correct.


WATER QUALITY GUIDE FOR PROFESSIONAL NOZZLES							
TYPES FRESH WATER POOL WATER SALT WATER							
pH VALUE	7.2 - 7.6	7.2 - 7.6	8.0				
HARDNESS	142 - 267 ppm CaCO ₃	142 - 267 ppm CaCO ₃	356 - 534 ppm CaCO ₃				
FREE CHLORINE	< 0.3 ppm	0.3 - 0.6 ppm	< 0.3 ppm				
CHLORIDE CONCENTRATION	< 250 ppm	< 250 ppm	22,000 ppm				
SALINITY	-	-	< 4.0%				
TOTAL SUSPENDED SOLIDS	< 50 ppm	< 50 ppm	< 50 ppm				
TEMPERATURE	39° - 95° F	39° - 86° F	39° - 68° F				

TECHNICAL DATA



FORMAL SPILLWAY

STAINLESS STEEL & COPPER FINISH SPILLWAY INSTALLATION




- Spillways are sized to exactly replace 4" tall block
- Load bearing capacity of Spillways is 80 lbs. per linear foot
- · Heavier water sheer of Spillways allows taller waterfall height of up to four feet above basin level
- 304 Stainless Steel is not compatible with chlorinated or salt water pools
- 316 Stainless Steel Spillways are for use wherever chlorine is used as a disinfecting agent

LIGHTING OPTIONS:

- Because the water flow coming out of the Spillways is not laminar, they cannot be lit from within like Colorfalls and Wall Spouts
- To illuminate Spillways, either uplight by placing a Ring Light or Bar Light directly below the falls or downlight by installing wall lights below the Spillway



- Wall Spouts should protrude at least 2" over the catch basin
- Integrated drip edge ensures any drip falls straight down preventing water from running back, dampening retaining wall
- Allow for the plumbing to be adjusted backwards to snug the spout against the wall, or caulk small gap between Spout and wall
- Flows under 600 gph will not allow Spout Light to illuminate water flow if used




4½" - OLIVETT

4¾" - MANTOVA

& VERONA

LIGHTING OPTIONS:

- To light the laminar flow of water coming out of a wall spout, install an 1½" tee fitting to supply water to the fixture fitted with a 1½" x 1" threaded bushing to accept a Warm White or Color Changing Spout Light
- With a minimum of 600 gallons per hour flow, the light will be fully encapsulated within the water illuminating the stream as it travels down to the basin



WATERWALL SPILLWAY INSTALLATION

- For framed wall installations, WaterWall Spillway installs on top of framed walls leaving 2" for concrete backer board and fascia
- Liner should cover framing and extend at least 18" to either side of WaterWall
- · Bottom of liner must overlap edge of pump basin or reservoir
- Use ball valve on pump to adjust flow
- For masonry installations, a channel may be cut into the course of block below the WaterWall to accommodate 1½" pipe and fittings

LIGHTING OPTIONS:

 Two Spotlights submerged at either corner of reservoir will cast light on water cascading down wall enhancing the appearance of movement

COPPER SPILLWAY BOWL INSTALLATION:

- Cap and one block in top course need to be removable to access rubber coupling
- Ensure that the spillway lip clears the column to avoid excessive splash and water loss
- For best results and the least amount of water loss, bowl height above reservoir should not exceed 3'

LIGHTING OPTIONS:

- Use Ring Light around included copper standpipe to illuminate interior of bowl
- Use Cord Seal Fitting in second inlet to pass light cord through bottom of bowl

COLOR CHANGING COLORFALLS INSTALLATION:



- Lip overhang should not exceed 1" to avoid algae issues, warping and loss of support
- Load bearing capacity of Colorfalls is 40 lbs. per linear foot
- For best results and the least amount of water loss, falls should not exceed max heights listed on page 14

CONNECTING MULTIPLE COLOR CHANGING COLORFALLS






Use included 11/2" threaded coupling to attach

multiple Colorfalls together.

2"F Lir

Plumb Colorfalls with 2" manifold or install



Use Splitters (CCBSX4) and InfiColor Smart Module (CCSM30X3) and larger Transformer to link and sync Color Changing Colorfalls.

Tip: Plumb directly into the back center of each unit. Plumbing multiple Colorfalls unevely favoring one side will produce an uneven water sheer.

valves to distribute water equally to all units.


INFICOLOR SMART MODULE & ATLANTIC CONTROL APP:

See page 176 for more information on Atlantic Control App and connecting Color Changing products.


STEP 2.

TECHNICAL DATA


FORMAL SPILLWAY AND FLEXIBLE BASIN INSTALLS & PLUMBING CONFIGURATIONS




COLORFALLS WITH FORMAL SPILLWAY BASIN




SPILLWAY WITH FORMAL SPILLWAY BASIN




WALL SPOUT WITH FLEXIBLE HARDSCAPE BASIN




COPPER SPILLWAY BOWL WITH FLEXIBLE HARDSCAPE BASIN



MULTIPLE COLORFALLS
INSTALLATION IN CUSTOM BASIN






MULTIPLE SPILLWAYS WITH FORMAL SPILLWAY BASIN

To feed multiple spillways create a manifold of 2" pipe with 11/2" risers and valves to balance the flow to two or three spillways. For total flows under 3000 gallons per hour, a single pump may be used; to feed multiple spillways install a pump at either end of the manifold.


To feed multiple Colorfalls create a manifold of 2" pipe with 11/2" risers and valves to balance

the flow to two or three Colorfalls. For total flows under 3000 gallons per hour, a single



MULTIPLE SPOUT INSTALLATION IN FLEXIBLE HARDSCAPE BASIN

To feed multiple spouts create a manifold of $2^{"}$ pipe with $1\frac{1}{2}$ " risers and valves to balance the flow to two or three spouts. For total flows under 3000 gallons per hour, a single pump may be used; for flows over 3000 gallons per hour, install a pump at either end of the manifold.




CORD SEAL FITTING INSTALLATION

To install Copper Spillway Bowl run plumbing to center inlet and seal secondary inlet with included 1½" Sch40 PVC plug using silicone or tape on threads. If lighting is desired, install 1½" Sch40 PVC male adapter included with Cord Seal Fitting (CSEAL15) in secondary inlet as shown and use Cord Seal Fitting to seal around lighting cord.


FLEXIBLE HARDSCAPE BASIN PLUMBING KIT (MODEL: FFKIT1 / ITEM: 87754)

Atlantic offers an easy way to plumb Flexible Hardscape Basins and simultaneously hide the pump cord, providing all the components needed to allow the pump cord to exit the basin invisibly. Two Cord Seal Fitting Kits, along with standard tees, allow the cord to pass from inside the basin to the exterior, inside the plumbing itself, without leakage. Once installed, the plumbing can be configured in any configuration desired, while the cord may be removed and replaced as needed.







Place the bulkhead fitting and rubber gasket through the hole in the Flexible Basin, threads to the outside. Place the flange and slip washer over the threads, then the nut. Turn COUNTERCLOCKWISE to tighten.




Attach the pump discharge elbow to the TT-Series pump. Hand tighten the assembly and orient the elbow so it is positioned over the pump body. Glue the included nipple into one of the long legs of the tee and glue the tee assembly into the union opposite the threaded end.



Pass the pump cord into the short leg of the tee and work the cord through the union and the bulkhead fitting. Screw the ½" male threaded end of the union into the bulkhead fitting. The Cord Seal Fitting will seal around the pump cord so it can pass through the plumbing without leaking. Disassemble the Cord Seal Fitting and slip the rubber gasket around the pump cord. Reassemble the Cord Seal Fitting ensuring the molded-in nuts are facing towards the tee. Be sure to align the inner and outer halves at 90° to each other and then start the screws.




Loosen the union as needed to orient the tee to a convenient position then push the Cord Seal Fitting into the tee, leaving enough slack in the pump cord to allow for pump maintenance and servicing. Tighten the Cord Seal Fitting. Align the tee downwards and tighten the union, then glue the pump discharge elbow into the union assembly.




Move to the back side of the wall to finish the remainder of the plumbing work. Slide a male thread adapter over the pump cord, apply silicone to the threads and install the adapter in the bulkhead fitting. Then, measure and cut a piece of pipe to extend from the male thread adapter to the back of the wall. Slide the section of cut pipe over the pump cord and glue into the male thread adapter. Next, slide a tee over the cord and glue that to the section of pipe, aligning the side-outlet of the tee towards the center of the back wall. Dissemble and reassemble a Cord Seal Fitting around the pump cord into the end of the tee.

FILTRATION OPTIONS

External pressure filters are particularly useful to keep open basins clean. They can be used with the pump set inside or outside the basin. Either way, first install the included bulkhead fitting through the liner following the included instructions. To mount the pump inside the basin, install a pair of tees on the output of the pump both inside and outside of the bulkhead fitting. This will allow the cord to pass through the wall inside the plumbing. Use a Cord Seal Fitting in each tee to seal around the pump cord. To install the pump outside the basin, remove the intake screen of the pump and connect a pipe directly from the bulkhead fitting to the pump intake. Connect the output of the pump to the filter and return the filtered water through the Spout(s) or Spillway to the basin.

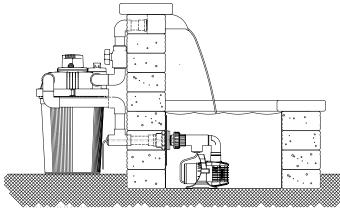

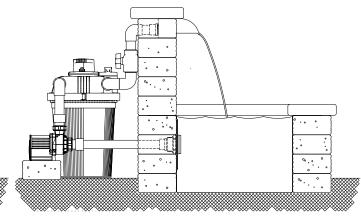

EXTERNAL FILTER WITH SUBMERSIBLE PUMP

EXTERNAL PUMP WITH INLINE PUMP

TECHNICAL DATA



POND-FREE

CALCULATING BASIN VOLUME

ECO-BLOX RESERVOIRS

Upon start-up, the pump draws water from the reservoir to fill the streambed, from top to bottom, until the water overflows back into the reservoir to complete the cycle. The amount of water needed to complete this cycle the 'transitional' water volume. If the reservoir is too small, or the streambed built improperly, the water level in the reservoir can drop below the top of the pump before cycling, leading to pump overheating and damage. Calculate the transitional water volume, then design the reservoir to hold at least three times as much, so the water level in the reservoir never drops by more than one-third when the pump is turned on, keeping the pump safely submerged at all times.

Assuming that it will take about 3" or 0.25 ft. of water to fill the stream and get the system recirculating, we can calculate the transitional volume, minimum reservoir volume and Eco-Blox quantity by using the formulas below:

Avg. Depth (.25ft) x Avg. Length (_____ft) x Avg. Width (____ft) = Transitional Volume

Transitional Volume x 3 = Minimum Reservoir Volume


Minimum Reservoir Volume ÷ 4.2 = Number of Eco-Blox to fill Reservoir

WATER DEPTH CONVERSIONS							
1" deep = 0.08'	2" deep = 0.16'	3" deep = 0.25'	4" deep = 0.33'	5" deep = 0.42'	6" deep = 0.50'		

GRAVEL-FILLED RESERVOIRS

Because Eco-Blox are 96% void space, they allow the reservoir to be dug to just the size required for the water volume needed. Backfilling with gravel fills 65% of the reservoir with stone, leaving only the 35% that remains between the stones available for water storage. This means that a gravel-filled basin will need to be three times larger than an Eco-Blox basin to hold the same volume of water. That's a lot more time, excavation, additional soil removed, additional gravel to fill the hole, labor costs and cleanup.

Transitional Volume x 9 = Minimum Reservoir Volume (when filled with gravel)

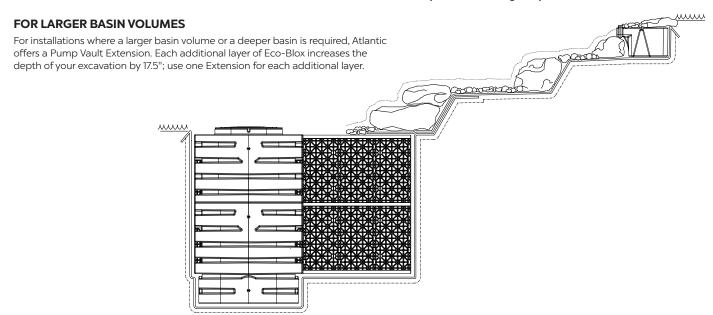

ROCK & GRAVEL CALCULATIONS

QUANTITY OF BOULDERS AND GRAVEL FOR A STREAM:

RATIO OF SIZES OF BOULDERS:

Tons of Boulders = 1.5 tons for every 10' of stream Tons of Gravel = Tons of Boulders \div 4

For every 1 ton of 6" - 12" boulders, get 2 tons of 12" - 18" boulders, 1 ton of 18" - 24" boulders

ECO-BLOX / PUMP VAULT LAYOUTS




STREAM BED CONSTRUCTION


The less the water level drops as the feature turns on and the stream fills, the better for proper function. Proper streambed construction can reduce the amount of water needed for this transition.

Since transitional volume is determined by the height that the weir rock extends above the liner at the spillways, minimizing that height reduces the amount of water necessary to fill the streambed. The drawings to the right display two examples of proper construction techniques for minimal transitional water.

IMPROPER STREAMBED CONSTRUCTION

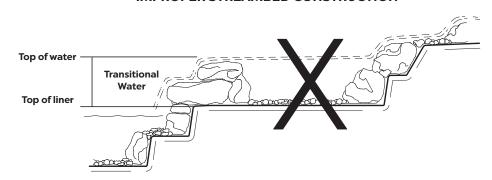

PROPER STREAMBED CONSTRUCTION

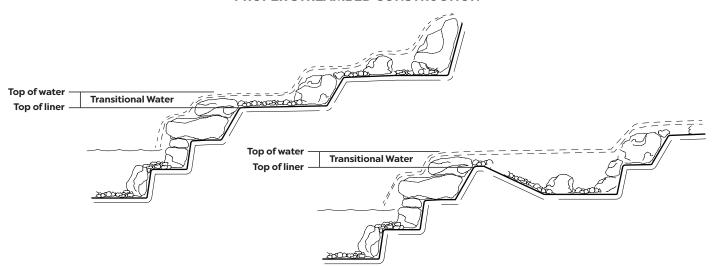


TECHNICAL DATA

WATER GARDEN

Upon start-up, the pump draws water from the pond to fill the streambed, from top to bottom, until the water overflows back into the pond to complete the cycle. We call the amount of water needed to complete this cycle the 'transitional' water volume. If the streambed is built improperly, or is built too big, the water level of the pond could drop below the opening in the skimmer before the water levels equalize. This would result in in the pump starving for water and running dry.

This situation can be easily avoided by using the formula provided to calculate the surface area of your pond. With that number, you can then determine the maximum surface area of waterfalls and streambed that your pond can accomodate.

To limit the transitional volume of water needed get the system cycling, the stream surface area should be half of the pond surface area or less. Follow quidelines for proper Streambed Construction.

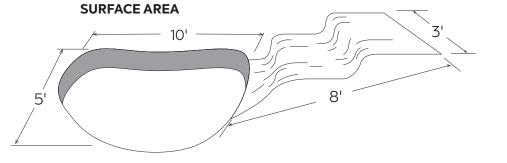

MAXIMUM AREA OF STREAM (IF YOU KNOW YOUR POND SIZE)

Average Length of Pond x Average Width of Pond \div 2 = Maximum Area

MINIMUM AREA OF POND (IF YOU KNOW YOUR STREAM SIZE)

Average Length of Stream x Average Width of Stream x 2 = Minimum

SIZING & CALCULATIONS

SIZING LINER (LENGTH, WIDTH AND DEPTH MEASURED IN FEET):

Pond Liner Length = Max. Length of Excavation + (2 x Maximum Depth) + 5' Pond Liner Width = Max. Width of Excavation + (2 x Maximum Depth) + 5'

Stream Liner Length = Max. Length of Stream + 5' Stream Liner Width = Max. Width of Stream + 5'

APPROXIMATE VOLUME OF WATER IN POND IN GALLONS:

Average Length x Average Width x Average Depth x 7.5 = Total Gallons in Pond

APPROXIMATE GALLONS OF WATER IN A STREAM:

Average Length x Average Width x Average Depth x 7.5

= Total Gallons in Stream

QUANTITY OF BOULDERS AND GRAVEL NEEDED FOR A FULLY ROCKED AND GRAVELED POND:

Tons of Boulders = Length x Width \div 40 Tons of Gravel = Tons of Boulders ÷ 4

QUANTITY OF BOULDERS AND GRAVEL FOR A STREAM:

Tons of Boulders = 2 tons for every 10' of stream Tons of Gravel = Tons of Boulders \div 4

RATIO OF SIZES OF BOULDERS:

For every 1 ton of 6" - 12" boulders, get 2 tons of 12" - 18" boulders, 1 ton of 18" - 24" boulders

Note: Figure volume of fully rocked and graveled pond at approximately 80% of bare liner volume. Overestimating volume may throw off filtration calculations and could lead to overdoses of treatments.


FILTRATION OPTIONS

After figuring the size of the pond, the flow required for proper circulation and the width of the waterfall, next is the filtration system. One of the most popular systems, especially for ponds with lower fish loads, is the Atlantic Skimmer and Biological FilterFalls. The Skimmer houses the pump and removes surface debris at the end of the pond farthest from the FilterFalls. The FilterFalls starts the waterfall or stream and removes both suspended debris and toxins like ammonia. Setting the two components as far as possible from each other helps sweep the entire pond surface of debris into the Skimmer and ensures good circulation. Heavier, settled debris can be removed by vacuum or pond cleanout.

Another filtration option for ponds with medium to high fish loads places a solids-handling pump on the bottom that pumps fish waste to a flow-through or pressure filter to remove solids and toxins, with an ultraviolet clarifier to control green water. In this system, pioneered by



Adding an Oase pump, filter and UVC to a pond equipped with a Skimmer and FilterFalls is the perfect combination, especially for ponds that are at or exceeding maximum fish load. Floating debris is trapped by the Skimmer, heavier waste pumped into an external filter which

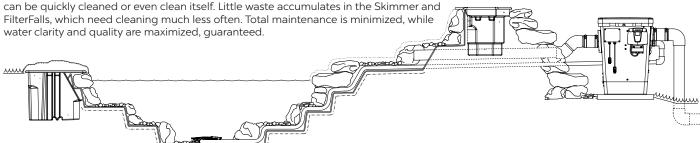

BOG CONSTRUCTION

Atlantic's Eco-Blox and Pump Vaults make excellent, easy to maintain upflow filters. The Pump Vaults act as distribution nodes and cleanouts. Eco-Blox, covered by a thin layer of planted gravel, create settling chambers that remove solids, nutrients and wastes. The void the blocks create under the gravel and plants removes and holds all the solids suspended in the water pumped into it. This avoids the problem of massive amounts of muck trapped in deep gravel beds that cannot be cleaned (which is where the term "bogs" came from.) To clean Eco-Blox upflow filters, simply install a drain so sediments can be drained out by opening a valve.


Conventional upflow filters pump water into the bottom of a gravel bed at or above pond level, that flows up and out through gravel and back into the pond. Upflow filters are typically located in a stream or along the perimeter of the pond. Because the debris ends up easily accessible near the surface, not trapped down in a deep gravel bed, upflow bogs are easy to keep clean. The thin layer of gravel stays highly oxygenated, so it's very effective at converting toxic ammonia and nitrite to nitrate, which can be removed by planting the gravel bed, giving rise to the name "veggie filter". Because the nitrates are delivered directly to the roots, plants in the beds grow prodigiously.

However, thin gravel beds are only effective at low flows, because solids only drop out of suspension as water velocity drops and there isn't much gravel to slow the water down. An Eco-Blox chamber under the gravel allows much higher flows to be filtered effectively. The partitions and large void spaces of the blocks quickly slow even high velocity flows, making the Eco-Blox upflow filter especially effective at removing suspended solids, even with minimal gravel thickness on top of only 4"-6." Bacteria in the highly oxygenated gravel on top of the Eco-Blox cycle ammonia at a very high rate. Plants in the gravel bed consume the nitrates produced and their roots help keep even the finest suspended solids from escaping the filter.

To simplify the plumbing, a Pump Vault acts as both the distribution node for incoming water, and the cleanout chamber for sediment. 3" bulkhead fittings top and bottom seal the liner to the wall of the Pump Vault, and a 3" valve allows wastes to flushed out to grade at will.

SIZING UPFLOW BOGS:

- For water gardens with few fish and no food added, size the bog at 10% of the surface area of the water garden
- For fish ponds with goldfish that are fed occasionally, size the bog at 20% of the surface area of the fish pond
- For koi ponds with koi that are fed frequently, size the bog at 30% of the surface area of the koi pond

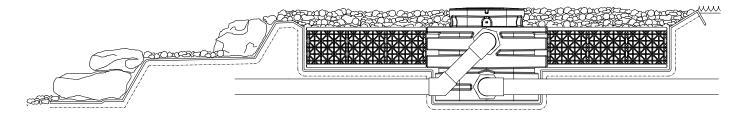

TECHNICAL DATA



PUMP

PUMP USAGE GUIDELINES

The water the pump will be moving determines which type of pump to use. "Clean water" pumps that handle small particles an eighth of an inch or less can be built to tight tolerances with high efficiency to move the most water per watt. Larger debris or abrasive sediments, like the wastes at the bottom of a pond, will require a solids-handling pump. Smaller impellers spinning in a large volute leave room for solids to pass without jamming, but this partial bypass design is inherently inefficient; solids-handling pumps draw more wattage than the same size clean water pump.

What's dissolved in the water also makes a difference. Salinity is corrosive to most metals, including mild stainless steel. Calcium salts readily bond to warm metal, causing scale that binds and overheats pumps. Metals in the water, especially iron, cause similar issues. Coating the rotor with plastic improves both salt- and scale resistance; special steel alloys resist salt and chlorine.

Finally, calculate the "Total Dynamic Head", the work a pump has to do, to specify the right size and type of pump. Find the Friction Head of the plumbing and add that to the Vertical Head for the TDH in feet of any application, p. 172.

MOTOR TYPES

Magnetic Induction pumps generate a magnetic field to spin an impeller. Best for low head, low volume applications because the field will slip under heavy load.

Mag Drive impellers are attached to a permanent magnet suspended inside a coil; when the coil is energized the magnet/impeller rotates.

Synchronous Mags rotate at the same speed as the frequency of the power supply.

Asynchronous pumps substitute a rotor with a coil in place of a permanent magnet; the rotor becomes a powerful electromagnet when the outer coil is energized.

Direct Drive impellers are directly attached to the motor via shaft, with shaft seals to keep the wet end isolated from the motor.

Direct Drive pumps handle solids, high volume/high head and restrictive plumbing but require significantly more power to run.

Axial Flow pumps push high volumes with an economical low-pressure impeller, but require large diameter plumbing to keep friction head to a minimum.

Brushless DC pumps are powerful and efficient, with built-in variable speed capability, but electronic control comes at a premium.

12 Volt pumps are specifically designed for applications where submersed line voltage pumps are prohibited, such as recreational ponds.

	MOTOR TYPE	SOLIDS	WATER QUALITY			HEAD HEIGHTS		
PUMP LINE			FRESH	CHLORINE	SALT	LOW <10'	MEDIUM 10'-20'	HIGH >20'
FP-SERIES	MAG DRIVE	Clean water only	•			•		
FOUNTAIN	SYNCHRONOUS MAG	≤ ³ / ₃₂ "	•			•		
MD-SERIES	MAG DRIVE	≤ ⁵ / ₃₂ "	•			•		
AQUARIUS ECO PREMIUM	SYNCHRONOUS ELECTRONIC	≤ ³ / ₃₂ "	•	<0.6 ppm	<4.0%	•	•	
AQUARIUS ECO EXPERT	DC BRUSHLESS	≤ ³ / ₁₆ ''	•	<0.6 ppm	<4.0%	•	•	•
AQUAMAX ECO CLASSIC	SYNCHRONOUS ELECTRONIC	≤⅓"	•			•		
AQUAMAX ECO PREMIUM	SYNCHRONOUS ELECTRONIC	≤3/8"	•			•		
TT-SERIES	ASYNCHRONOUS	≤9/ ₃₂ "	•			•	•	
WATERFALL	SYNCHRONOUS MAG & ASYNCHRONOUS (6600-8000)	≤ ³ / ₁₆ "	•			•	•	
AQUAMAX ECO EXPERT	DC BRUSHLESS	≤7/16"	•	<0.6 ppm	<4.0%	•	•	•
PAF-SERIES	DIRECT DRIVE	≤ 1½"	•				•	
SH-SERIES	DIRECT DRIVE	≤ 1½"	•			•	•	
A-SERIES	DIRECT DRIVE	$A-05 \le \frac{9}{32}$ " $A-21-32 \le \frac{15}{32}$ "	•				•	
L-SERIES	AXIAL FLOW	≤ ¹³ / ₃₂ "	•			•		

PUMP APPLICATION GUIDELINES

- For very low head, very low volume, use Fountain Pumps (FP-Series and Fountain Pumps)
- For low head, low volume, use Magnetic Drive Pumps (MD-Series)
- For low head, very high volume, use Axial Pumps (L-Series) with 3" or larger tubing
- For medium head, medium volume, use Asynchronous and Synchronous Pumps (TT-Series, Waterfall, AquaMax Classic and Premium)
- For medium head, medium volume variable operation, use TidalWave Variable Speed Controller (TWVSC) with TT-Series Asynchronous Pumps
- For high head, high volume applications, use Direct Drive Pumps (A-Series)
- For solids and dirty water applications, use Direct Drive Solids Handling Pumps (PAF and SH-Series)
- For variable flow from low to high head and low to high volume, use DC Brushless Pumps (Aquarius and AquaMax Eco Expert)

CALCULATING TOTAL DYNAMIC HEAD

1. PICK A LOOK & SPECIFY A FLOW:



LOW FLOW ≈ 750 GPH PER FOOT ≈ 1500 GPH PER FOOT



HIGH FLOW ≈ 2250+ GPH PER FOOT

Choose the appearance you would like for your waterfall from the suggested choices to the left. Multiply the corresponding GPH Per Foot by the desired Width of the Waterfall to find the Recommended Flow

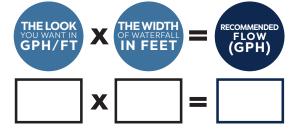


CHART A

FLOW		TUBING SIZE								
(GPH)	1/2 11	3/411	1″	11/4"	11/2"	2"	3"			
100	0.10	0.01								
200	0.38	0.05	0.01							
300	0.83	0.10	0.02							
400	1.00	0.18	0.04	0.01						
500	2.23	0.27	0.06	0.02						
750		0.50	0.14	0.04	0.02					
1000		0.84	0.21	0.07	0.03					
1250		1.20	0.33	0.10	0.04	0.01				
1500			0.43	0.15	0.06	0.02				
2000			0.94	0.26	0.10	0.03				
3000			2.07	0.52	0.22	0.05				
4000				1.10	0.43	0.09	0.01			
5000				1.80	0.67	0.15	0.02			
6000					0.96	0.22	0.03			
8000					1.77	0.38	0.05			
10,000						0.59	0.07			
12,000						0.84	0.10			
15,000							0.15			
18,000							0.25			

Example: GPH: 3000 Friction Loss: 0.05 Tubing: 2" ** For flows over 20,000 GPH or lengths over 100 ft. please contact us

FRICTION LOSS PER FOOT OF TUBING


2. DETERMINE FRICTION LOSS: 2.1 FIND TUBING SIZE & FRICTION

Find the dark blue cell in the row that corresponds with the **Recommended Flow (GPH)** in CHART A. The column indicates the recommended tubing size and the number in the cell is the Friction Loss in every foot of tubing. Keep Friction Loss low for greatest flow

To find the Friction Loss of existing systems, estimate the flow through the actual tubing size used.

2.2 ADD FRICTION IN FITTINGS

Add the equivalent lengths of all the fittings in the system, from CHART B, to the tubing length from pump to falls to find the **Equivalent Tubing Length.**

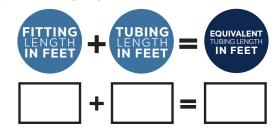

2.3 CALCULATE FRICTION HEAD

Multiply the **Equivalent Tubing Length** in feet by the **Friction Loss** in the dark blue cell from CHARTA to find the **Friction Head** of the system.


CHART B FRICTION IN EQUIVALENT FEET OF STRAIGHT PIPE

PVC		FITTING SIZE							
FITTINGS	3/411	1"	11/4"	11/2"	2"	3"			
Std Elbow, 90 degree	4.5	5.5	7.0	7.5	8.5	11.0			
Std Elbow, 45 degree	1.0	1.5	2.0	2.5	3.0	4.0			
Male / Female Adapter	1.5	2.0	3.0	3.5	4.5	6.5			
Tee (Straight Thru)	2.5	3.0	5.0	6.0	8.0	12.0			
Tee (Thru Branch)	5.5	7.0	9.0	10.0	12.0	17.0			
Swing Check Valve	9.0	11.0	13.0	15.0	19.0	27.0			

Example: 8.5 (90°) + 4.5 (M/FA) + 19.0 (Check Valve) = 32 (Fitting Length in Feet)

3. FIND THE TOTAL DYNAMIC HEAD


Add the Friction Head in Feet to the Vertical Head to find TDH. Vertical Head is the height in feet from the surface of the water the pump will be sitting in, to the highest point the water is pumped to.

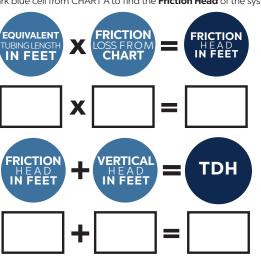

4. CHOOSE YOUR PUMP

Locate the column representing the Total Dynamic Head (TDH) on the pump chart (opposite page). Find the pump that provides the required flow at that TDH. If the chart gives you a choice of more than one pump, check for the type that best fits your application, then check for the lowest wattage, to save on operating costs

TECHNICAL DATA

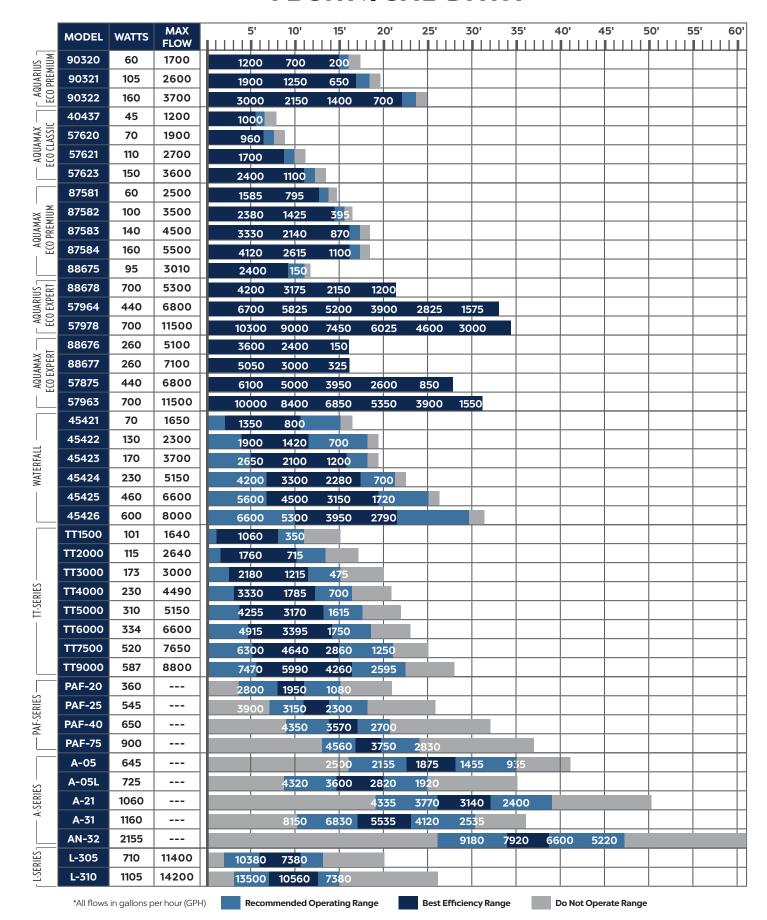

COST TO RUN A PUMP

Take the rate per kilowatt per hour, multiply that by the wattage of the pump and divide by 1000. For the monthly cost, multiply the hourly cost by 720 (24 hours per day times 30 days in a month). For more information, visit the College of Pumps in the Atlantic Water Gardens University, www.atlanticwatergardens.com/university.

COST PER HOUR = _____ \$ /kW/hr. x _____ Watts ÷ 1000 = ____ x 720 = ____ COST PER MONTH Example: Electric costs \$0.10/kW/hr, the pump draws 100 Watts, so \$0.10/kW/hr x 100W/1000 = \$0.01/hr x 720hrs/mo = \$7.20/month


GROUNDING PLATE


This added measure of protection on Oase pumps exceeds all electrical safety standards. The grounding plate provides the path of least resistance, insuring that any electrical leakage, from any power source in your pond or fountain, harmlessly exits the pond or fountain through the grounding wire. With this feature, your pond or fountain will have unparalleled protection against electrical hazards.




AQUARIUS ECO EXPERT PUMP SEQUENCES


The Aquarius Eco Expert comes pre-programmed with "Scene 1", a sequence of varying pump outputs and times that creates a dancing fountain effect. Switch between eleven additional sequences using the Eco Control Module or Cloud Controller. The Cloud Controller offers the additional benefit of Cloud-based control via application through your home router, for access to the pump from anywhere there's an Internet signal.































TECHNICAL DATA



LIGHTING

MAKING CONNECTIONS


The multistrand cord for Color Changing Lighting carries both AC and DC current that cannot be interchanged, so proper alignment of plugs is a must. **Dielectric grease must be used in all connections.** Any water intrusion into the quick-connect plugs will cause short circuiting and deterioration of the contacts. Make sure all connecting plugs are fully tightened. To fully tighten plugs, seat the nut as tightly as possible, then flex the connection two or three times and re-tighten the nut. Repeat until you can no longer tighten the nut. This assures the o-ring is fully seated and the connection is weather-tight. As a general rule, full or partial submersion of quick-connect plugs should be avoided.

REPLACING DIODES ASSEMBLIES


All the diode assemblies of the lights pictured can be replaced as needed. For the Hardscape Lights, remove the screws, unplug the light bar, plug in the new light bar, align the silicone gasket and retighten screws.

For the 2 and 4 watt Spotlights and the Spout Light, unscrew the bezel by hand, remove the diode assembly, replace and retighten bezel. In every case, make sure silicone gasket is properly seated to avoid leaks.


2 WATT SPOTLIGHT:

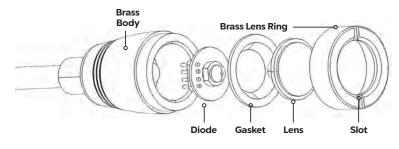


4 WATT SPOTLIGHT:

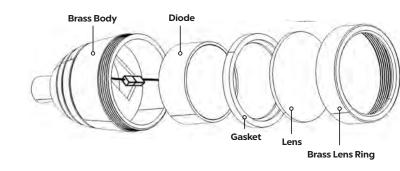

HARDSCAPE LIGHT:

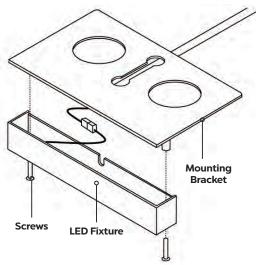

SPOUT LIGHT:

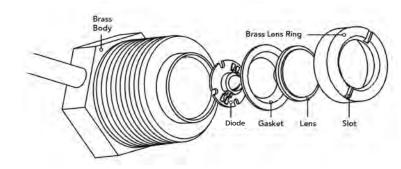

HOW TO CALCULATE WATTAGES & MAKE CUSTOM SETUPS

HOW TO CALCULATE WATTAGES & MAKE CUSTOM SETUPS

The InfiColor Smart Module provides 30 watts to each of three zones, for a max of 80 watts per InfiColor Smart Module. The zones may be linked and synchronized as desired. Add up the wattage of each light, which can be found in the Catalog, the packaging, the instructions or the website, to find the total wattage of the group. The wattage shown is the highest wattage that the light will draw, rounded up to ensure Smart Module capacity is never exceeded (80 watts).

There is also a limit to the length of any lighting run. The number of extension cords you can use consecutively depends on the total wattage of the zone. If your total wattage is:

0-7 watts - 4 extension cords max 7-15 watts - 3 extension cords max 15-22 watts - 2 extension cords max

22-30 watts - 1 extension cord max

INFICOLOR MOBILE APP

To Configure Zone Names and Timers

Click dropdown menu. Edit the names of the control module outlets or zones on the "Zone Settings" page. These zone names will be visible throughout the app. Each zone has an individual timer function to turn the zone on and off at set times. Click the "Save" button to save changes. A box will come up notifying the user the settings have been saved. Click the "Back" button once you have completed configuration.



Color Tab

Use the Color tab to choose colors for the different zones using either the color picker or the red, green and blue sliders at the bottom. Choose the brightness of the color by adjusting the slider. Select the color for each zone, or select multiple zones to change color at the same time.



Favorites Tab

The Favorites tab stores preset color changing sequences. Select one, two or all three zones. Choose a sequence of colors, then choose the transition between them, the speed of the sequence and the brightness. Swipe left on sequences to delete stored Favorites.



OFF-TIME: 03:19 PM

(ZONES: Zones

Custom tab

The Custom tab allows you to create and store a custom color changing sequence. Select the cell of the sequence to edit the color. Move the red, green and blue sliders to choose a color, or select it from the color picker. Repeat as desired. Add up to 10 colors to a sequence. Once the sequence has been created it can be named and saved. The saved sequence will be available on the Favorites page.

USING THE CORD SEAL FITTINGS TO PASS A LIGHT CORD THROUGH THE WATER SUPPLY LINE

There may be times when the only way to run a light cord into a reservoir is to pass the cord inside the water supply plumbing. Atlantic's Cord Sealing Fittings do just that, simply and easily. First, determine how to attach two Tee fittings to the supply plumbing, one on either side of the pass-through fitting that goes through the reservoir wall. Usually a Sch. 40 PVC 1½" Tee is the preferred size, because the cord will not affect water flow in that large a supply line. Once the Tees are in place, pass the light cord through the Tees. Open the Cord Seal Fittings and insert the cord into each one, then tighten the fittings into the open legs of the Tees, snugging the cord between the fittings before fully tightening. Turn on water supply and check for leaks.



TECHNICAL DATA




MAINTENANCE

SMALL POND AERATION:


Aeration is critical for water clarity and quality, summer and winter.

In warm weather, aeration circulates and oxygenates water to the bottom, allowing for fast aerobic decomposition of wastes and eliminating hot spots at the surface where algae thrives.

In cold weather, move the aerator to the shallows to keep a section of the surface free of ice economically, allowing replenishment of oxygen and the degassing of carbon dioxide, without disturbing the pocket of warm water at the bottom of the pond.

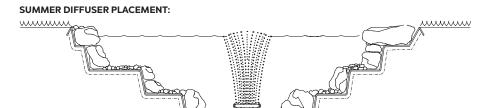

WINTER DIFFUSER PLACEMENT:

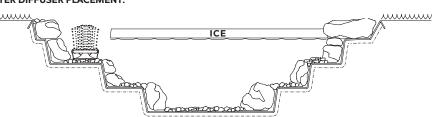

REPLACING DIAPHRAGMS IN AIR PUMPS


Rubber diaphragms are a wearable part that will need servicing over time. Moisture, heat and dust will all shorten the life of the diaphragms. Please follow the following steps when installing replacement diaphragms.


TA0400 & TA0800

- Remove the four screws on the bottom of air pump housing.
- Remove the top cover taking care not to damage/misplace the outer gasket and four O-rings that seal the housing at the screw connections.
- Remove the three screws and the bracket that hold the diaphragm cartridge in place.
- Unplug the outlet hose and remove the diaphragm cartridge.
- Discard and install the new cartridge.

TA1800 & TA3600

- Remove the top cover housing for the air pump. Loosen the air chamber screws (1) and remove the outer air chamber (2).
- Loosen the diaphragm nut (3) and remove the diaphragm depressor (4), electrostatic membrane (5) and the damaged diaphragm (6).
- Install the new diaphragm ensuring that the rubber tabs align properly with the notches on the inner air chamber.
- Once the diaphragm is seated properly, assemble the components by following the previous steps in reverse order.



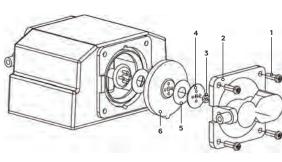

WATER TREATMENT GUIDE

CONDITION:	REVIVE	BIOMAX+	QUICKCLEAR	ECOKLEAN	CLARITYBLAST	BIOMAX
NEW WATER GARDEN	•	•				
WATER CHANGE	•	•				
ADDING FISH	•	•				
ELEVATED AMMONIA	•	•				
MUDDY / CLOUDY WATER			•			
SUSPENDED ORGANICS		•	•		•	•
ATTACHED ORGANICS				•	•	
SLUDGE					•	
PLANT DEBRIS				•	•	•
FOUL ODOR					•	•




POND & LAKE

Aeration and bacterial treatments are the best way to maintain ponds and lakes clear, clean and sediment free when properly sized and dosed. The three keys to sizing aeration are Depth, Shape and Profile.


DEPTH

Circulation is directly proportional to depth. The deeper the water, the longer the path to the surface for the rising bubbles and the more water each bubble can pull upwards with it. The rising water has to be replaced by water sweeping in towards the diffuser, so a relatively small amount of air rising from deep water can circulate a tremendous volume. Shallow water doesn't provide as much 'fetch', or time for the bubbles to act on the water column, so circulation is reduced and more air needed per given area. The water welling up from a deeply set diffuser has a great deal of inertia, which causes it to flow outward in all directions once it reaches the surface. The diameter of the circle of aerated water created is proportional to the depth. The same diffuser set in shallow water will aerate a smaller area.

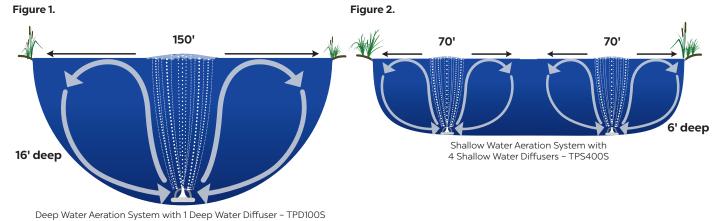

SHAPE

The shape of the water feature also affects circulation. A simple circle can typically be circulated with just one diffuser, while more complex shapes with coves and peninsulas that impede flow will require more diffusers, and more air. All four lakes below have the same area, but their different layouts require a different number of diffusers.

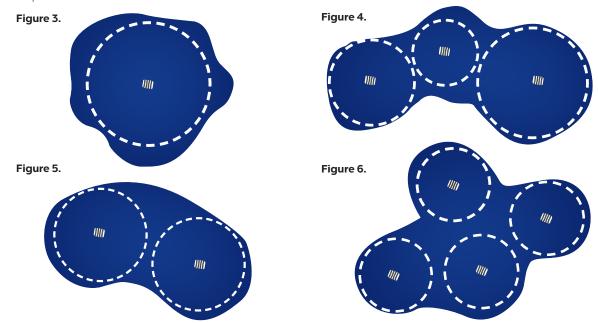

PROFILE

The quantity and placement of diffusers depends on the inner profile of the water feature as well, which will either enhance or impede flow. Rounded profiles with steep sides and few shelves or obstructions, like the bowl-shaped pond in Figure 1, can be aerated most easily. Wide, flat bottomed features like the pond in Figure 3, or shallow lakes with debris and vegetation everywhere will be more difficult to aerate and circulate effectively.

TECHNICAL DATA

SIZING YOUR SYSTEM: USE SURFACE AREA FOR LAKES WITH SIMPLE SHAPES AND SINGLE DEPTHS

Step 1. If your pond is roughly rectangular, square or circular, find the area of the pond and convert the square footage to acres by dividing by 43,560. (1 acre = 43,560ft²)


Step 2. Find the Acreage and Depth of your pond on the Chart to determine the correct system or number of systems.

EXAMPLE:

For the roughly square pond at the right, 150 feet on a side: Multiply $150' \times 150'$ to find the area and divide by 43,560 to convert to surface acres.

150' X 150' = 22,500 ft² 22,500 ft² ÷ 43,560 ft²/acre = .52, about ½ surface acres

Find the column corresponding to 16' and locate the matching surface area. In this case the correct system is a TPD100S-87R6. In the case of lakes larger than the surface areas listed, multiple systems will be required.

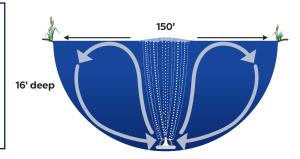

SYSTEM	No. of Diffusers	Coverage @2'	Coverage @4'	Coverage @6'	Coverage @8'	Coverage @12'	Coverage @16'	Coverage @20'
TPS200S	2	% acre	% acre	¼ acre				
TPS400S	4	¼ acre	⅓ acre	½ acre				
TPD100S-87R6	1				¼ acre	⅓ acre	½ acre	1 acre
TPD200S-87R6	2				½ acre	¾ acre	1 acre	2 acres
TPD300S-72R6	3				¾ acre	1 acre	1½ acres	3 acres
TPD400S-72R6	4				1 acre	1½ acres	2 acres	4 acres


SIZING YOUR SYSTEM: USE DIAMETERS FOR LAKES WITH COMPLEX SHAPES AND MULTIPLE DEPTHS


Step 1. Draw the perimeter roughly to scale or download a satellite image.

Step 2. Determine the depth(s) and find the corresponding size circle from the tables below.

Step 3. Draw circles to scale, covering the surface without overlapping. Each circle equals one diffuser.

Step 4. Find the appropriate shallow or deep water system(s) with the correct number of diffusers.



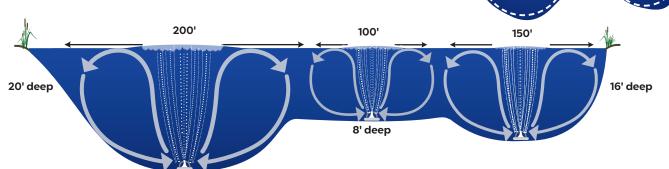

EXAMPLE:

The lake above is 200' wide and 20' deep at one end, 150' wide and 16' at the other, with a shallower 8' deep section 100' wide in the middle. From the depths on the chart below, draw the three circles to scale on your sketch. In this example, three circles are sufficient, so you will need a deep water system with three diffusers. The second column of the chart above indicates the required system with three deep water diffusers is the TPD300S-72R6. In the case of larger lakes requiring more than four diffusers, use multiple systems to cover the entire surface area.

AREA COVERED BY SHALLOW WATER DIFFUSER							
DEPTH	@2'	@4'	@6'				
Circle Diameter	40'	55'	70'				
Diffusers per Surface Acre	16	12	8				

AREA COVERED BY DEEP WATER DIFFUSER							
DEPTH	@ 8 '	@12'	@16'	@20'			
Circle Diameter	100'	120'	150'	200'			
Diffusers per Surface Acre	4	3	2	1			



CLEAR WATER GUARANTEE

What we guarantee:

Oase has engineered specific filter systems to provide the OASE Clear Water Guarantee (CWG). Using a CWG filter system we guarantee you will be able to read the 1" marking on a tape measure when the tip is submerged to a depth of 3 feet.

The Clear Water System is comprised of 3 elements – filter, UVC, and pump.

- A pump to feed the water into a filter
- A filter that ensures biological and mechanical cleaning
- A UVC clarifier to clean the green out of the water

The Right Combination of products based on the size of your pond and fish load will result in crystal clear water.

Any Size Pond can have a Clear Water System. New construction or retrofitted to an existing pond.

Remove the Guesswork by following the 4 easy steps of the Clear Water Guarantee

4 STEPS TO A CLEAR WATER GURANTEE

1. Determine your pond volume:

For circular ponds: Pond volume (gallons) = diameter (ft.) x diameter (ft.) x depth (ft.) x 7.5 For rectangular ponds: Pond volume (gallons) = length (ft.) x width (ft.) x depth (ft.) x 7.5

2. **Determine the fish load:** The more fish in the pond, the higher the nutrient load and the larger the filter system should be.

LIGHT - Planted ponds with few or no fish

MEDIUM - Planted ponds with 10 in. of fish per 100 gallons of water or less

HEAVY - Ponds with koi or 20+ in. of fish per 100 gallons of water

3. Choose the correct filter system: Choose the filter system that best suits your pond and use the Filter Sizing Chart to determine the appropriate sized components for your application.

IN-POND FILTER SYSTEMS

For small ponds. In-pond filters include 3 nozzle choices for appeal and added aeration.

PRESSURE FILTER SYSTEMS

For small to medium ponds. Pressure filters can be remotely located, partially buried and feed waterfalls.

FLOW-THROUGH FILTER SYSTEMS

For medium to large ponds. Flow-through filters sit above water level and return water by gravity or by pump.

4. Install and maintain the filter system: Install the CWG products per installation instructions. Clean the filter as needed and replace the UVC bulb annually.

QUALIFYING PRODUCTS

ULTRAVIOLET CLARIFIERS (UVC):


- VitronicBitron C
- Bitron Premium

FILTER PUMPS:

- AquaMax Eco Classic
- AquaMax Eco Premium
- AquaMax Eco Expert

FILTERS:

- Filtral UVC
- BioPress
- FiltoClear
- BioSmart
- BioTec ScreenMatic²
- ProfiClear Premium Compact
- ProfiClear Premium XL



TECHNICAL DATA

CLEAR WATER GUARANTEE FILTER SIZING CHART

	FISH LOAD		FUTED	IIV.C	BUMB
LIGHT	MEDIUM	HEAVY	FILTER	UVC	PUMP
			IN-I	POND FILTER SYSTEM	IS
<400 gal	<200 gal	_	Filtral UVC 400	5W (included)	195 gph included
<800 gal	<400 gal	-	Filtral UVC 800	9W (included)	235 gph included
<1,600 gal	<800 gal	-	Filtral UVC 1600	13W (included)	410 gph included
			PRE	SSURE FILTER SYSTEM	MS
<1,000 gal	<500 gal	<250 gal	BioPress 1000	7W (included)	AquaMax Eco Classic 1200
<1,600 gal	<800 gal	<400 gal	BioPress 1600	9W (included)	AquaMax Eco Premium 2500 / AquaMax Eco Classic 1900
<2,400 gal	<1,200 gal	<600 gal	BioPress 2400	9W (included)	AquaMax Eco Premium 3500 / AquaMax Eco Classic 2700
<3,400 gal	<1,700 gal	<850 gal	FiltoClear 3400	24W (included)	AquaMax Eco Premium 2500 / AquaMax Eco Classic 1900
<5,200 gal	<2,600 gal	<1,300 gal	FiltoClear 5200	42W (included)	AquaMax Eco Premium 3500 / AquaMax Eco Classic 2700
<8,200 gal	<4,100 gal	<2,050 gal	FiltoClear 8200	60W (included)	AquaMax Eco Premium 4500 / AquaMax Eco Classic 3600
			FLOW-T	HROUGH FILTER SYS	TEMS
<5,000 gal	<2,500 gal	<1,250 gal	BioSmart 5000	Vitronic 18	AquaMax Eco Premium 2500 AquaMax Eco Classic 1900
<10,000 gal	<5,000 gal	<2,500 gal	BioSmart 10000	Vitronic 36	AquaMax Eco Premium 3500 AquaMax Eco Classic 2700 AquaMax Eco Premium 3000 12V
<18,000 gal	<9,000 gal	<4,500 gal	BioTec ScreenMatic ² 18000	Bitron C 55	AquaMax Eco Premium 4500 AquaMax Eco Classic 3600 AquaMax Eco Premium 3000 12V
<21,000 gal	<10,500 gal	<5,250 gal	ProfiClear Premium Compact-M Pump-fed	Bitron C 110	AquaMax Eco Classic 3600 AquaMax Eco Premium 3000 12V AquaMax Eco Premium 4500 AquaMax Eco Expert 6800* AquaMax Eco Expert 5300 12V
<24,000 gal	<12,000 gal	<6,000 gal	BioTec ScreenMatic ² 24000	Bitron C 110	AquaMax Eco Premium 4500 AquaMax Eco Classic 3600 AquaMax Eco Premium 3000 12V
<31,500 gal	<15,750 gal	<7,875 gal	ProfiClear Premium Compact-L Pump-fed	Bitron C 110 Bitron Premium 60	AquaMax Eco Premium 3000 12V AquaMax Eco Premium 4500 AquaMax Eco Expert 6800* AquaMax Eco Expert 5300 12V & 7100 12V*
<31,500 gal	<15,750 gal	<7,875 gal	ProfiClear Premium Compact-L Gravity-fed	Bitron C 110 Bitron Premium 60 Bitron Premium 180	AquaMax Eco Premium 3000 12V AquaMax Eco Premium 4500 AquaMax Eco Premium 5500 AquaMax Eco Expert 6800* AquaMax Eco Expert 5300 12V & 7100 12V*
<39,000 gal	<19,500 gal	<9,750 gal	BioTec ScreenMatic ² 39000	Bitron C 110	AquaMax Eco Premium 4500 & 5500 AquaMax Eco Expert 6800* AquaMax Eco Expert 5300 12V & 7100 12V*
<79,000 gal	<39,500 gal	<19,750 gal	ProfiClear Premium XL Pump-fed	Bitron Premium 60 Bitron Premium 180	AquaMax Eco Expert 6800 AquaMax Eco Expert 11500 AquaMax Eco Expert 7100 12V
<104,000 gal	<52,000 gal	<26,000 gal	ProfiClear Premium XL Gravity-fed	Bitron Premium 60 Bitron Premium 180	AquaMax Eco Expert 6800 AquaMax Eco Expert 11500 AquaMax Eco Expert 7100 12V
***************************************	w down to max f				<u> </u>

^{*}Must adjust flow down to max flow of filter

BLUE = ACTION

Oase products have specific components that are designed to be adjusted, opened or maintained. These parts are colored blue to indicate exactly where to interact with the product, such as flow control adjustment, tubing connections, locking clips, manual cleaning handles and nozzle adjustment fittings.







ACCESSORIES & PARTS

FORMAL SPILLWAYS							
	ITEM MODEL DESCRIPTION FOR USE WITH						
	73847	CFMA12	CFBASIN12 Replacement Filter	CFBASIN12			
	73848	CFMA24/36	CFBASIN24/36 Replacement Filter	CFBASIN24 / CFBASIN36			

		FILTRAL UVC		
	ITEM	DESCRIPTION	FOR USE WITH	INCLUDES
	76983	Replacement Foam Set Filtral UVC 400	Filtral UVC 400	1x - Blue 1x - Orange
	76984	Replacement Foam Set Filtral UVC 800	Filtral UVC 800	1x - Blue 1x - Orange
	76985	Replacement Foam Set Filtral UVC 1600	Filtral UVC 1600	1x - Blue 1x - Orange
	19503	Bio-Surface Element	Filtral UVC 400 / 800 / 1600	-
100	72795	Replacement Ceramic Bag - Filtral Small	Filtral UVC 400	-
	72796	Replacement Ceramic Bag - Filtral Medium	Filtral UVC 800	-
	72797	Replacement Ceramic Bag - Filtral Large	Filtral UVC 1600	-

SKIMMER								
	ITEM	MODEL	DESCRIPTION	FOR USE WITH				
	74019	BK4600	Skimmer Brush Kit	PS4600				
建工业	74020	ВК7000	Skimmer Brush Kit	PS7000				
NAME OF TAXABLE PARTY.	74018	BK15000	Skimmer Brush Kit	PS15000				
	74025	MK4600	Matala Mat Kit with support frame	PS4600				
	74026	MK7000	Matala Mat Kit with support frame	PS7000				
	74024	MK15000	Matala Mat Kit with support frame	PS15000				
	74028	NT3000	PS3000 Replacement Net	PS3000				
A / - M	74029	NT3900	PS3900 Replacement Net	PS3900				
	74030	NT4600	PS4600 Replacement Net	PS4600				
	74031	NT7000	PS7000 Replacement Net	PS7000				
	74027	NT15000	PS15000 Replacement Net	PS15000				
	74034	SM3900	PS3900 Replacement Mat	PS3900				
	74035	SM4600	PS4600 Replacement Mat	PS4600				
	74036	SM7000	PS7000 Replacement Mat	PS7000				
	74033	SM15000	PS15000 Replacement Mat	PS15000				
J	74017	BD2000	Bottom Drain Kit	PS4600/PS7000/PS15000				

ACCESSORIES & PARTS

FILTOCLEAR									
ITEM	DESCRIPTION	FOR USE WITH	INCLUDES						
91646	FiltoClear 3400 Filter Foam Set	FiltoClear 3400	1x - Orange 1x - Blue 1x - Purple						
91647	FiltoClear 5200 Filter Foam Set	FiltoClear 5200	1x - Orange 2x - Blue 1x - Purple						
91648	FiltoClear 8200 Filter Foam Set	FiltoClear 8200	2x - Orange 2x - Blue 1x - Purple						

BIOSMART									
	ITEM	DESCRIPTION	FOR USE WITH	INCLUDES					
	40974	BioSmart 5000-10000 Red Foam Set	BioSmart 5000 (requires 1 set) BioSmart 10000 (requires 4 sets)	1x - Red					
	40975	BioSmart 5000-10000 Blue Foam Set	BioSmart 5000 (requires 2 sets) BioSmart 10000 (requires 4 sets)	1x - Blue					
	40976	BioSmart 5000-10000 Green Foam Set	BioSmart 5000 (requires 1 set) BioSmart 10000 (requires 1 set)	1x - Green					

FILTERFALLS					
	ITEM	MODEL	DESCRIPTION	FOR USE WITH	
	73987	BB0500	Bio-Rocks Media - 0.5 cubic ft.	BG2234	
	73990	BG2234	18" x 22" Media Bag	BB0500 / BB1500	
	74001	MA1600	Matala Filter Kit	BF1600	
	74002	MA1900	Matala Filter Kit	BF1900	
	74003	MA2600	Matala Filter Kit	BF2600	
	74004	MA3800	Matala Filter Kit	BF3800	
of the	73989	BFK100	Back Flush Kit for FilterFalls	BF1900 / BF2600 / BF3800	
	73996	MT1600	BF1600 Replacement Filter	BF1600	
	73997	MT1900	BF1900 Replacement Filter	BF1900	
	73998	MT2600	BF2600 Replacement Filter	BF2600	
	73999	MT3800	BF3800 Replacement Filter	BF3800	
	73995	MA2820	Filter Material - 2" x 28" x 20' Roll	-	

ACCESSORIES & PARTS

BIOPRESS							
ITEM DESCRIPTION FOR USE WITH INCLUDES							
	46971	BioPress 1000 Filter Foam Set BioPress 1000		2x - Blue 1x - Black			
	40969	Biopress 1600-2400 Filter Foam Set	Biopress 1600 / BioPress 2400 (requires 2 sets)	2x - Blue 1x - Black			

UVC BULBS						
	ITEM	DESCRIPTION	FOR USE WITH			
	40963	7 Watt UVC Replacement Bulb	Filtral UVC 700 / BioPress 1000			
	40964	9 Watt UVC Replacement Bulb	Vitronic 9 / Filtral UVC 1200 / Biopress 1600 / BioPress 2400			
	40965	18 Watt UVC Replacement Bulb	Vitronic 18 / FiltoClear 3000			
	41011	24 Watt UVC Replacement Bulb	FiltoClear 4000 / FiltoClear 3400			
	40966	36 Watt UVC Replacement Bulb	Vitronic 36			
£ (a)	91649	42 Watt UVC Eco Replacement Bulb	FiltoClear 5200			
	40967	55 Watt UVC Replacement Bulb	Bitron C 55 / Bitron C 110 (requires 2 bulbs) / FiltoClear 8000			
F	91650	60 Watt UVC Eco Replacement Bulb	FiltoClear 8200			

BIOTEC SCREENMATIC ²						
	ITEM	DESCRIPTION FOR USE WITH		INCLUDES		
	48781	BioTec ScreenMatic ² 18000 & 38000 Blue Foam Set	Biotec ScreenMatic² 18000 Biotec ScreenMatic² 39000 (requires 2 sets)	2x - Blue		
	48780	BioTec ScreenMatic ² 18000 & 38000 Red/Purple Foam Set	Biotec ScreenMatic ² 18000 (requires 3 sets) Biotec ScreenMatic ² 39000 (requires 7 sets)	1x - Red 1x - Purple		
	89166	BioTec ScreenMatic² 24000 Blue Foam Set	BioTec ScreenMatic ² 24000 (requires 2 sets)	2x - Blue		
	89165	BioTec ScreenMatic² 24000 Red/Purple Foam Set BioTec ScreenMatic² 24000 (requires 6 s		1x - Red 1x - Purple		
	36981	Phosless Algae Reducer	Biotec ScreenMatic² 18000 (requires 1½ sets) Biotec ScreenMatic² 24000 (requires 2 sets) Biotec ScreenMatic² 39000 (requires 6 sets)	2x		

PUMPS					
	ITEM	DESCRIPTION	FOR USE WITH		
	84031	Extension Cable 12V Premium 32'/10m	#88675 AquaMax Eco Premium 3000 12V		
	84032	Extension Cable 12V Eco Expert 32'/10m	AquaMax Eco Expert 5300 12V AquaMax Eco Expert 7100 12V Aquarius Eco Expert 5300 12V		

ACCESSORIES & PARTS

PROFICLEAR PREMIUM COMPACT						
	ITEM	DESCRIPTION	MEDIA SPECIFIC SURFACE AREA	FOR USE WITH		
	72731	Hel-X 13mm Bio-Media - 20L Pack	245 ft²/ft³	ProfiClear Premium Compact-M ProfiClear Premium Compact-L ProfiClear Premium Individual Module ProfiClear Premium Moving Bed Module		
	73372	PondPads 20L	3,330 ft²/ft³	ProfiClear Premium Moving Bed Module		

INSTALLATION					
	MODEL	ITEM	DESCRIPTION		
	406-015B	74211	1½" 90° (SOC X SOC)		
	406-020B	74212	2" 90° (SOC X SOC)		
-	406-030	74213	3" 90° (SOC X SOC)		
	429-015B	74214	1½" STRAIGHT COUPLING (SOC X SOC)		
Part De	429-020B	74215	2" STRAIGHT COUPLING (SOC X SOC)		
	429-030	74216	3" STRAIGHT COUPLING (SOC X SOC)		
	436-015B	74217	1½" MALE THREAD ADAPTER (MIPT X SOC)		
	436-020B	74218	2" MALE THREAD ADAPTER (MIPT X SOC)		
	436-030	74219	3" MALE THREAD ADAPTER (MIPT X SOC)		
	SPSEAL	73815	Stand Pipe Sealant - Pack of 4 Strips		
	CV30	74221	3" Swing Check Valve		
•		85310	3" Inline adapter for Eco Expert Pumps		

POND & LAKE					
	ITEM	MODEL	DESCRIPTION	FOR USE WITH	
688	73959	TPD87R-645-REBUILD	Rebuild Kit for TPD87R6	TPD87R6	
	73958	TPD72R-655-REBUILD	Rebuild Kit for TPD72R6	TPD72R6	
	73957	REP TPDF INSERT	TPD Compressor Filter	TPD72R6 / TPD87R6	

AO PRO CONTRACTOR PROGRAM



At Atlantic-Oase we pride ourselves on producing the best, most innovative and widest range of water feature products on the market, as you would expect from the world's largest manufacturer. If you share the same pride in your work as we do, you should consider joining the Atlantic-Oase Professional Network.

Atlantic-Oase Professionals Contractors are the best in the business, trained to install our products correctly the first time, every time. These experienced contractors bring more than just technical expertise to bear, they bring their artistry and passion to the network. As a member of that network, you'll be part of a friendly, helpful community of folks who share their time and their work with their peers. You'll have access to exclusive training opportunities, online and in-person, led by the best in the business.

CONTRACTOR REWARDS PROGRAM

Atlantic-Oase proudly presents the Contractor Rewards Program. This promotion offers contractors a rebate on all Atlantic and Oase products purchased during the calendar year (liner excluded). Simply sign up on our website at www.atlantic-oase.com/rewards, your distributor submits your purchases on our website, and

receive a check at the end of the year!



Three easy steps to getting cash back!

- 1. Sign up on our website: www.atlantic-oase.com/rewards
- 2. Distributors submit your purchases to our website
- 3. Receive a check at the end of the year

*All Carlisle liner purchases will receive a rebate

2025 CONTRACTOR TRAINING DATES

Are you looking for more experience installing water features? Want to add new revenue to your bottom line? Or broaden your understanding of the water feature business? We designed our Atlantic-Oase Contractor Training for you!



We are currently offering 4 training sessions that cover Fountains, Formal Spillways, Pondfree, Water Gardens, Advanced Systems, sizing, specifying, maintenance and more!





WHAT'S PROVIDED:

- 3-day education on Atlantic-Oase product and installations
- · Hotel 3 nights
- · Meals provided with key Atlantic-Oase personnel and some of our top industry contractors
- Travel between dinners, hotel & office
- Copies of presentation, helpful cheat sheets and estimating guides, swag bag and more

WHO SHOULD ATTEND?

Contractors who:

- Want to add additional profit streams to their business
- Want to learn how to install different water feature types
- Want to understand how to profit from water features
- Want to learn more about the global leader in water features
- Want to have fun while they learn

AWG UNIVERSITY

Atlantic-Oase University is your online home for water feature education. Start with the College of Construction then move on to Pumps, Filtration and Biology for solid, non-biased, valuable information from professionals that have years of experience in the field. When you finish each section, take the course exam to test your knowledge and earn your Atlantic-Oase University Certificate of Completion.









SOCIAL MEDIA

Follow us on all of our social media accounts to stay in the loop for all news Atlantic-Oase. We feature tech tips, inspirational photos, special announcements, behind-the-scenes and everything water features. Don't forget to use the @atlantic-oase to tag us in your posts.










POP MATERIAL



Item: 61900 Model: TMBP **Description: Choosing the Perfect Pump Bifold**



Item: 61901 Model: TMBPF **Description: Pond-free Bifold**



Item: 61903 Model: TMBWG **Description: Water Garden Bifold**



Item: 61902 Model: TMBPL **Description: Pond & Lake** Management Booklet



Item: 74279 Model: SS DISPLAY **Description: 316 Stainless Steel Spillway Skeleton Display** Dimensions: 20"W x 24"D x 30"H



Item: 74278 Model: SC DISPLAY **Description: Copper Finish Spillway Skeleton Display Dimensions**: 20"W x 24"D x 30"H



Item: 74277 Model: CF DISPLAY **Description: Colorfalls Skeleton Display** Dimensions: 20"W x 24"D x 30"H



Item: 74280 Model: WS DISPLAY **Description: Wall Spout Skeleton Display** Dimensions: 20"W x 24"D x 30"H



Item: 62149 Model: TMAO-W **Description: Atlantic-Oase Wall Banner** Dimensions: 60"W x 36"H

Atlantic Oase

Description: Retail Header Card for 4' Shelving Displays

Item: 63186

Model: RETHEADER46512

Dimensions: 46½"W x 12"H





Item: 61897 Model: TMATL-S **Description: Atlantic Standing Banner** Dimensions: 36"W x 83"H

Ø Atlantic Oase

Item: 63188 RETSHECHI 241X12

Description: Shelf Channels for Retail Shelving (12-pack)

Dimensions: 24"W x 1¼"H

CUSTOMER LOGIN INFO

To access our high resolution product images and product data, please use our Customer Login. The Customer Login will give you access to product data, product images and resources for your company. You will be able to download our full catalog, product categories or individual products at your discretion. Please contact your Regional Sales Rep or the Marketing Department for login information.



